


Overview (availability varies by configuration and by country)

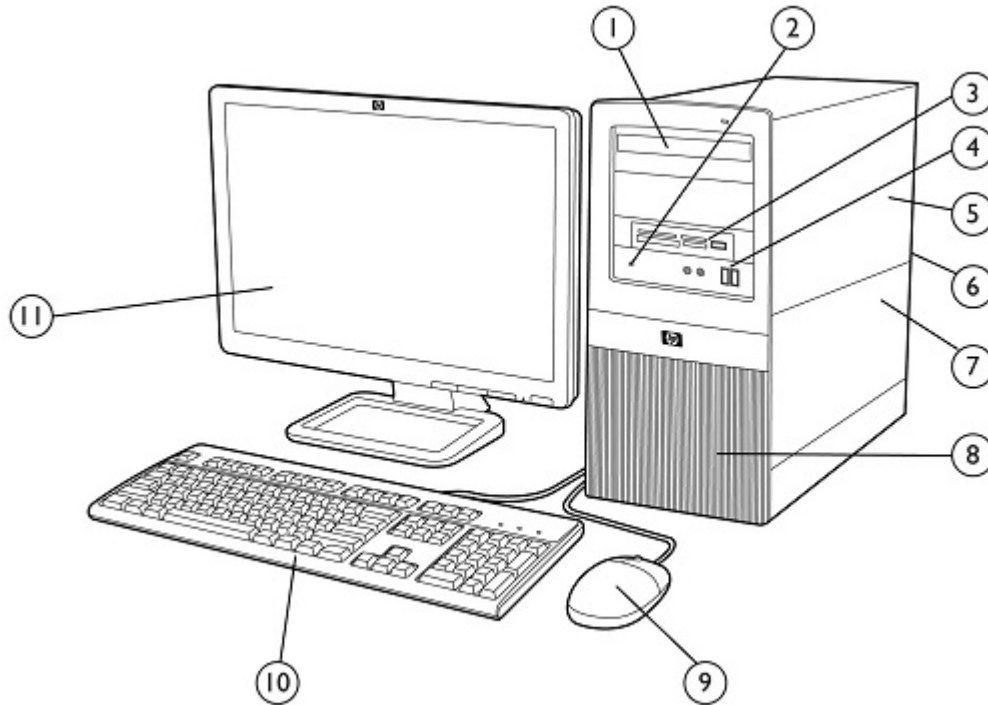

- | | |
|--|---|
| 1. (2) external 5.25" drive bays for optional optical drives | 7. PCI 2.3 slots, PCIe x1 slots, PCIe x16 slot (see page 9) |
| 2. Reset/recovery button | 8. (2) internal 3.5" hard drive bays |
| 3. (1) external 3.5" drive bay for optional media reader or Pocket Media drive | 9. USB Scroll Mouse |
| 4. Front I/O includes: (2) USB 2.0 ports, dedicated headphone output, microphone jack | 10. USB HP Standard Keyboard |
| 5. Standard efficiency Power Supply or optional energy efficient Power Supply | 11. Monitor (sold separately) |
| 6. Rear I/O includes: USB 2.0 ports (see page 9), serial port (select models), SPDIF out, PS/2 mouse and keyboard ports (HP Pro 3115 only), RJ-45 network interface, DVI-D and VGA video interfaces, microphone jack, audio in/out jacks | |

Overview *(availability varies by configuration and by country)*

At A Glance

- Genuine Windows 7 versions, Genuine Windows Vista versions, SuSE Linux Enterprise Desktop 11, or FreeDOS
- Choice of Intel® or AMD processor
- Choice of integrated graphics or ATI or NVIDIA graphics cards
- Up to 16 GB DDR3 SDRAM system memory available standard (select models)
- Up to 2 TB 3.0 Gb/s SATA hard drive with RAID 0/1 support (select models)
- Choice of optical drives: DVD-ROM, SuperMulti DVD Writer, or Blu-Ray Writer
- Integrated Realtek 8111DL Gigabit Ethernet Controller (HP Pro 3115, 3120 and 3130)
Integrated Realtek RTL8105E 10/100 Ethernet Controller (HP Pro 3125)
- HP Wireless 802.11 b/g/n PCIe x1 Card
- USB 2.0 ports
- VGA and DVI-D video port
- Legacy ports (select models)
- Optional energy efficient power supply
- Protected by HP Services. Terms and conditions vary by country. Certain restrictions and exclusions apply.



Standard Features (availability varies by configuration and by country)

Processors

(Availability depends on model; list is subject to change)

Intel Celeron® Processors:

Intel Celeron 450 Processor (2.2 GHz, 512 KB L2 cache, 800 MHz FSB)

Intel Celeron Dual-Core Processors:

Intel Celeron E3300 Processor (2.5 GHz, 1 MB L2 cache, 800 MHz FSB)

Intel Pentium® Dual Core Processors:

Intel Pentium E5400 Processor (2.7 GHz, 2 MB L2 cache, 800 MHz FSB)

Intel Pentium E5500 Processor (2.8 GHz, 2 MB L2 cache, 800 MHz FSB)

Intel Pentium E6500 Processor (2.93 GHz, 2 MB L2 cache, 1066 MHz FSB)

Intel Pentium E6600 Processor (3.06 GHz, 2 MB L2 cache, 1066 MHz FSB)

Intel Pentium E6700 Processor (3.2 GHz, 2 MB L2 cache, 1066 MHz FSB)

Intel Core®2 Duo Processors:

Intel Core 2 Duo E7500 Processor (2.93 GHz, 3 MB L2 cache, 1066 MHz FSB)

Intel Core 2 Duo E7600 Processor (3.06 GHz, 3 MB L2 cache, 1066 MHz FSB)

Intel Core 2 Duo E8500 Processor (3.16 GHz, 6 MB L2 cache, 1333 MHz FSB)

Intel Core 2 Quad Processors:

Intel Core 2 Quad Q8300 Processor (2.5 GHz, 4 MB L2 cache, 1333 MHz FSB)

Intel Core 2 Quad Q8400 Processor (2.66 GHz, 4 MB L2 cache, 1333 MHz FSB)

Intel Core 2 Quad Q9500 Processor (2.83 GHz, 6 MB L2 cache, 1333 MHz FSB)

Intel Core i3 Processors (HP Pro 3130 only):

Intel Core i3-530 Processor (2.93 GHz, 4 MB Intel Smart Cache, DMI 2.5 GT/s)

Intel Core i3-540 Processor (3.06 GHz, 4 MB Intel Smart Cache, DMI 2.5 GT/s)

Intel Core i3-550 Processor (3.20 GHz, 4 MB Intel Smart Cache, DMI 2.5 GT/s)

Intel Core i5 Processors (HP Pro 3130 only):

Intel Core i5-650 Processor (3.20 GHz, 4 MB Intel Smart Cache, DMI 2.5 GT/s)

Up to 3.46 GHz with Intel Turbo Boost Technology

Intel Core i5-660 Processor (3.33 GHz, 4 MB Intel Smart Cache, DMI 2.5 GT/s)

Up to 3.6 GHz with Intel Turbo Boost Technology

Intel Core i5-670 Processor (3.46 GHz, 4 MB Intel Smart Cache, DMI 2.5 GT/s)

Up to 3.73 GHz with Intel Turbo Boost Technology

Intel Core i5-750 Processor (2.66 GHz, 8 MB Intel Smart Cache, DMI 2.5 GT/s)

Up to 3.2 GHz with Intel Turbo Boost Technology

Intel Core i7 Processors (HP Pro 3130 only):

Intel Core i7-860 Processor (2.8 GHz, 8 MB Intel Smart Cache, DMI 2.5 GT/s)

Up to 3.46 GHz with Intel Turbo Boost Technology

Intel Core i7-870 Processor (2.93 GHz, 8 MB Intel Smart Cache, DMI 2.5 GT/s)

Up to 3.6 GHz with Intel Turbo Boost Technology

Intel Core i7-880 Processor (3.06 GHz, 8 MB Intel Smart Cache, DMI 2.5 GT/s)

Up to 3.73 GHz with Intel Turbo Boost Technology

NOTE: Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families.

AMD Sempron™ Processors:

AMD Sempron 140 Processor (2.7 GHz, 1M L2 cache, 4000 GT/s System BUS)



Standard Features (availability varies by configuration and by country)

AMD Sempron 145 Processor (2.8 GHz, 1M L2 cache, 4000 GT/s System BUS)

AMD Athlon™ II X2 Dual Core Processors:

AMD Athlon II X2 215 Processor (2.7 GHz, 1M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X2 220 Processor (2.8 GHz, 1M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X2 240 Processor (2.8 GHz, 2M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X2 245 Processor (2.9 GHz, 2M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X2 250 Processor (3.0 GHz, 2M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X2 255 Processor (3.1 GHz, 2M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X2 260 Processor (3.2 GHz, 2M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X2 265 Processor (3.3 GHz, 2M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X2 270 Processor (3.4 GHz, 2M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X3 Triple Core Processors:

AMD Athlon II X3 425 Processor (2.7 GHz, 1.5M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X3 435 Processor (2.9 GHz, 1.5M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X3 440 Processor (2.9 GHz, 1.5M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X3 445 Processor (3.0 GHz, 1.5M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X3 450 Processor (3.1 GHz, 1.5M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X4 Quad Core Processors:

AMD Athlon II X4 620 Processor (2.6 GHz, 2M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X4 630 Processor (2.8 GHz, 2M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X4 635 Processor (2.9 GHz, 2M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X4 640 Processor (3.0 GHz, 2M L2 cache, 4000 GT/s System BUS)

AMD Athlon II X4 645 Processor (3.1 GHz, 2M L2 cache, 4000 GT/s System BUS)

AMD Phenom™ II X2 Dual Core Processors:

AMD Phenom II X2 545 Processor (3.0 GHz, 7M L2+L3 cache, 4000 GT/s System BUS)

AMD Phenom II X2 550 Processor (3.1 GHz, 7M L2+L3 cache, 4000 GT/s System BUS)

AMD Phenom II X2 555 Processor (3.2 GHz, 7M L2+L3 cache, 4000 GT/s System BUS)

AMD Phenom II X3 Triple Core Processors:

AMD Phenom II X3 720 Processor (2.8 GHz, 7.5M L2+L3 cache, 4000 GT/s System BUS)

AMD Phenom II X3 740 Processor (3.0 GHz, 7.5M L2+L3 cache, 4000 GT/s System BUS)

AMD Phenom II X4 Quad Core Processors:

AMD Phenom II X4 820 Processor (2.8 GHz, 6M L2+L3 cache, 4000 GT/s System BUS)

AMD Phenom II X4 830 Processor (2.8 GHz, 8M L2+L3 cache, 4000 GT/s System BUS)

AMD Phenom II X4 925 Processor (2.8 GHz, 8M L2+L3 cache, 4000 GT/s System BUS)

AMD Phenom II X4 945 Processor (3.0 GHz, 8M L2+L3 cache, 4000 GT/s System BUS)

AMD Phenom II X4 955 Processor (3.2 GHz, 8M L2+L3 cache, 4000 GT/s System BUS)

AMD Phenom II X4 960T Processor (3.2 GHz, 8M L2+L3 cache, 4000 GT/s System BUS)

AMD Phenom II X4 B95 Processor (3.3 GHz, 8M L2+L3 cache, 4000 GT/s System BUS)

AMD Phenom II X6 Six Core Processors:

AMD Phenom II X6 1035T Processor (2.6 GHz, 9M L2+L3 cache, 4000 GT/s System BUS)

AMD Phenom II X6 1055T Processor (2.8 GHz, 9M L2+L3 cache, 4000 GT/s System BUS)



Standard Features (availability varies by configuration and by country)

Operating System	Preinstalled	Genuine Windows 7 Professional Edition (32-bit)*
		Genuine Windows 7 Professional Edition (64-bit)*
		Genuine Windows 7 Home Premium Edition (32-bit)*
		Genuine Windows 7 Home Premium Edition (64-bit)*
		Genuine Windows 7 Ultimate Edition (32-bit)*
		Genuine Windows 7 Ultimate Edition (64-bit)*
		Genuine Windows 7 Home Basic Edition (32-bit)*
		Genuine Windows 7 Home Basic Edition (64-bit)*
		Genuine Windows 7 Starter (limited regions support)*
		Genuine Windows Vista Business (32-bit)**
		Genuine Windows Vista Home Basic (32-bit)**
		SuSE Linux Enterprise Desktop 11
		FreeDOS

* System may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

** Certain Windows Vista product features require advanced or additional hardware. See: <http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx> and <http://www.microsoft.com/windowsvista/getready/capable.mspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>.

Chipset	HP Pro 3115	AMD 760G Chipset
	HP Pro 3120	Intel G43 Express Chipset
	HP Pro 3125	AMD 760G Chipset
	HP Pro 3130	Intel H57 Express Chipset

Graphics		HP Pro Microtower Model			
		3115	3120	3125	3130
Integrated	Integrated Intel Graphics Media Accelerator X4500HD		X		
	Integrated Intel Graphics Media Accelerator Core HD				X
	Integrated ATI Radeon 3000 Graphics	X		X	
	NOTE: HP Pro 3130 with Intel Core i5 750 processor or any Intel i7 processor has no integrated graphics.				
Graphics Cards (List is subject to change)	ATI Radeon HD 4350 HDMI (512MB) FH PCIe x16 Graphics Card	X	X		
	ATI Radeon HD 4550 (512MB) DH PCIe x16 Graphics Card	X	X	X	X
	ATI Radeon HD 4650 (1GB) PCIe x16 Graphics Card	X	X	X	X
	ATI Radeon HD 5450 (1GB) FH PCIe x16 Graphics Card	X	X	X	X
	ATI Radeon HD 5450 (512MB) FH PCIe x16 Graphics Card	X	X		X



Standard Features (availability varies by configuration and by country)

ATI Radeon HD 5570 (2GB) FH PCIe x16 Graphics Card		X	X	
ATI Radeon HD 5570 (1GB) FH PCIe x16 Graphics Card	X	X		X
NVIDIA GeForce G210 HDMI (512MB) PCIe x16 Graphics Card	X	X	X	X
NVIDIA GeForce GT220 (1GB) FH PCIe x16 Graphics Card	X	X	X	X
NVIDIA GeForce GT230 (1.5GB) PCIe x16 Graphics Card	X	X	X	X
NVIDIA GeForce GT315 (1GB) PCIe x16 Graphics Card	X	X	X	X
NVIDIA GeForce GT315 (512MB) PCIe x16 Graphics Card	X	X	X	X
NVIDIA GeForce GT320 (1GB) FH PCIe x16 Graphics Card		X	X	

System Memory

Memory Type

PC3-10600 DDR3 SDRAM (1066/1333MHz) non-ECC

Expansion Slots

Four (4) DIMM slots

Maximum Memory*

HP Pro Microtower Model

3115

3120

3125

3130

16 GB

8 GB

16 GB

16 GB

Standard Configurations

1-GB (1 x 1GB)
 2-GB (2 x 1GB)
 2-GB (1 x 2GB)
 3-GB (1 x 1GB + 1 x 2GB)
 4-GB (4 x 1GB)
 4-GB (2 x 2GB)
 4-GB (1 x 4GB) select models
 5-GB (2 x 2GB + 1 x 1GB)
 6-GB (3 x 2GB)
 8-GB (4 x 2GB)
 8-GB (2 x 4GB) select models
 16-GB (4 x 4GB) select models

NOTE: Memory runs at maximum system supported speed of 1066 MHz, or at 800 MHz when processor has 800 MHz FSB.

* For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.




Standard Features (availability varies by configuration and by country)

Storage	Hard Drive (SATA)	3.5-inch, 7200 rpm, 3.0 Gb/s SATA Hard Drive (NCQ, SMART):	
		160 GB	750 GB
	RAID 0/1 support available with HP Pro 3130 only	250 GB	1 TB
		320 GB	1.5 TB
		500 GB	2 TB
		640 GB	
	3.5-inch, 5400 rpm, 3.0 Gb/s SATA Hard Drive (NCQ, SMART):		
	1 TB		
	1.5 TB		
	2 TB		
	USB Pocket Media Drive (PMD) and Bay	HP 3.5-inch Pocket Media Drive Bay HP 250GB or 320GB 3.5-inch Pocket Media Drive	
	Media Reader	HP 22-in-1 Media Card Reader	
	Optical Drive (SATA)	DVD-ROM Drive	
		SuperMulti DVD Writer HP SATA Blu-ray Writer	

Bays	Internal	Two (2) 3.5-inch
	External	Two (2) 5.25-inch; One (1) 3.5-inch



Standard Features (availability varies by configuration and by country)

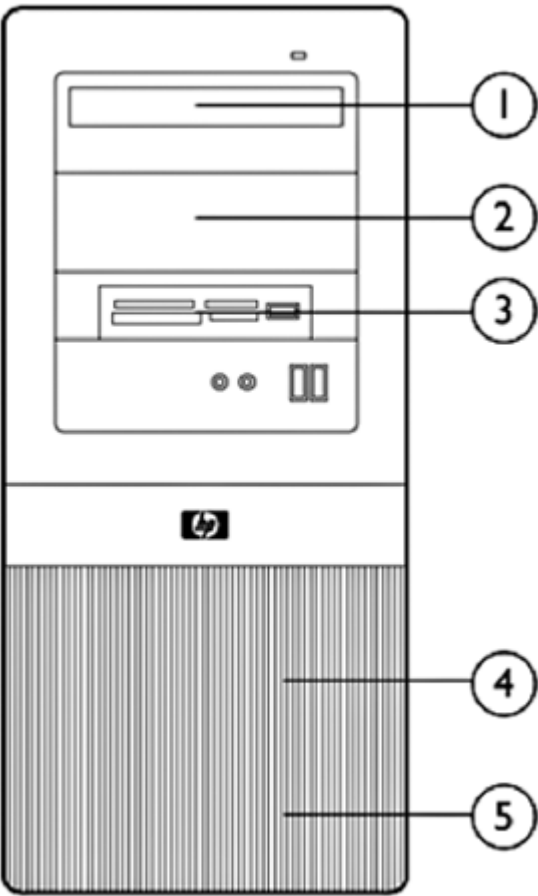

	Maximum Quantity Supported	Position Supported	Controller
Drive Support			
Media Reader	1	3	Internal USB 2.0 port
USB Pocket Media Drive (PMD)	2	1, 2	Internal USB 2.0 port
DVD-ROM Drives	2	1, 2	SATA
SuperMulti Drives	2	1, 2	SATA
HP Blu-Ray Writer	2	1, 2	SATA
3.5" Serial ATA Hard Drives	2	4, 5	SATA

Standard Features (availability varies by configuration and by country)

Slots	HP Pro Microtower Model			
	3115	3120	3125	3130
# PCI 2.3 slots	2	0	0	0
# PCI Express x1 slots	1	3	3	3
# PCI Express x16 slots	1	1	1	1
# MiniPCI slots	0	0	1	1

Communication

Integrated Realtek 8111DL Gigabit Ethernet Controller (HP Pro 3115, 3120 and 3130)
 Integrated Realtek RTL8105E 10/100 Ethernet Controller (HP Pro 3125)
 Intel Gigabit CT Desktop NIC
 LSI PCIe x1 56K International SoftModem
 HP Wireless 802.11 b/g/n PCIe x1 Card

USB Support

EHCI high-speed USB 2.0 controller
 Six (6) internal ports on system board:

- 2 for front ports
- 2 for media card reader
- 2 reserved for future upgrade

External USB 2.0 ports	HP Pro Microtower Model			
	3115	3120	3125	3130
Front	2	2	2	2
Rear	6	4	4	6

Optional HP USB 3.0 4-port SuperSpeed full height PCIe x1 card

Interfaces

One (1) PS/2 keyboard port (HP Pro 3115 only)
 One (1) PS/2 mouse port (HP Pro 3115 only)
 One (1) analog VGA video port
 One (1) DVI-D video port
 One (1) RJ45 network port
 One (1) serial port (select models)
 One (1) SPDIF out
 One (1) audio in; 5.1/7.1 audio channel out; one (1) microphone in

Audio

Realtek ALC888S High Definition audio codec



Standard Features (availability varies by configuration and by country)

Input Devices

Keyboard – One of the following

HP PS/2 Standard Keyboard (HP Pro 3115 only)
HP USB PS/2 Washable Keyboard
HP USB Standard Keyboard
HP USB Mini Keyboard
HP USB Smartcard Keyboard

Mouse – One of the following

PS/2 2-Button Optical Scroll Mouse (HP Pro 3115 only)
USB 2-Button Optical Scroll Mouse
USB 2-Button Laser Mouse

Miscellaneous

Port Control Cover
HP Chassis Security Kit
HP Parallel Port Adapter
HP Serial Port Full Height Adapter
HP Serial/Parallel PCI Card

NOTE: HP Parallel Port Adapter and 2nd Serial Port Adapter are not supported on the HP Pro 3130.

Software

Preinstalled software (varies by country)

Microsoft Office 2007 Ready (select models)
or
Microsoft Office 2010 Preloaded (purchase of a Product Key required to activate a full Office 2010 suite)*
Microsoft Windows Virtual PC - XP
Mozilla Firefox for HP Virtual Solutions
Hard Disk Partitioning
Roxio Creator Business 10 HD **
Corel WinDVD 8***
Corel WinDVD BD for Blu-Ray**
McAfee Total Protection Anti-Virus***
PDF Complete
2008 Intel Matrix Storage Manager
HP Power Manager v2.0
HP ProtectTools Suite SMB
HP Total Care Advisor
USB Port Disable
Sun Java Runtime Environment
HP Sky Room 1.x

* Microsoft Office 2010 Preloaded includes reduced functionality versions of Word and Excel, unless a full version suite is added to the configuration at additional cost. Purchase of Product Key required to activate full Office 2010 suite available at participating resellers/retailers and <http://www.office.com>.

** Supporting software available with certain optical drive configurations.

*** 60 day trial period for McAfee Total Protection for Small Business software. Internet access required to receive updates. First update included. Subscription required for updates thereafter.



Standard Features (availability varies by configuration and by country)

Security

Padlock loop
Kensington Lock Support
Noble Universal Clamp Lock Cable Kit

Power Supply

250W PFC HV immunity (410V/s) and 300W NPFC power supply with a 115v/230v line switch (varies by country/region) as Standard configuration for APJ and LANA regions respectively, and 300W PFC HV immunity (410V/s) with a 115v/230v line switch and 300W 85% Efficiency power supply as option for APJ only

Model	250W/300W PFC+HV	300W Non-PFC	300W 85% Eff
Rated Voltage Range	100 to 127VAC, or 200 to 240VAC	100 to 127VAC, or 200 to 240VAC	100 – 240 VAC
115V/230V Line switch	Yes	Yes	N/A

Service and Support

On-site Warranty^{Note 1}: 1-1-1, 3-1-1, 3-3-3, 3-3-3 limited, 4-4-4, 5-5-5 limited warranty delivers on-site, next business-day^{Note 2} service for parts and labor and includes free telephone support^{Note 3} 24 x 7. Global coverage^{Note 2} ensures that any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. One-year onsite and labor are not available in all countries.

NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.

NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

NOTE 3: Technical telephone support applies only to HP-configured Compaq and third-party HP-qualified hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

After-Market Options (availability varies by configuration and by country)

Communications	NICs	
	Intel Gigabit CT Desktop NIC	FH969AA
	Wireless LAN	
	HP Wireless 802.11/b/g/n PCIe x1	FH971AA
	Modems	
	LSI PCIe x1 56K International SoftModem	FH970AA
<hr/>		
Hard Disk Drives	HP 1-TB SATA 3.0-Gb/s Hard Drive	VU353AA
	HP 500-GB SATA 3.0-Gb/s Hard Drive	KW347AA
	HP 320-GB SATA 3.0-Gb/s Hard Drive	FH963AA
	HP 250-GB SATA 3.0-Gb/s Hard Drive	PY278AA
	HP 160-GB SATA 3.0-Gb/s Hard Drive	PY277AA
<hr/>		
Removable Storage Devices	HP 22-in-1 Media Card Reader	AR941AA
<hr/>		
Input Devices	Keyboards	
	HP PS/2 JB Standard Keyboard (HP Pro 3115 only)	DT527A
	HP USB JB Standard Keyboard	DT528A
	HP USB Smartcard Keyboard (Carbonite/Silver)	ED707AA
	HP USB PS2 Washable Keyboard	VF097AA
	HP USB Mini Keyboard	AS601AA
	HP 2.4GHz Wireless Keyboard & Mouse	TBD
	Mice	
	HP PS/2 2-Button Optical Scroll Mouse (HP Pro 3115 only)	EY703AA
	HP USB 2-Button Optical Scroll Mouse	DC172B
	HP USB 2-Button Laser Mouse	GW405AA
<hr/>		
I/O Adapter	HP Serial/Parallel PCI Card	KD062AA
	HP Parallel Port Adapter (not available on HP Pro 3130)	KD061AA
	HP 2nd Serial Port Adapter (not available on HP Pro 3130)	PA716A
	HP FireWire / IEEE 1394 PCI Card	PA997A
	Belkin Serial to USB adapter	EM449AA
<hr/>		
Memory	HP 1GB PC3-10600 (DDR3-1333) DIMM	AT023AA
	HP 2GB PC3-10600 (DDR3-1333) DIMM	AT024AA
	HP 4GB PC3-10600 (DDR3-1333) DIMM	AT025AA



After-Market Options (availability varies by configuration and by country)

Audio	HP Thin USB Powered Speakers	KK912AA
Graphics	ATI Radeon HD 4550 (512MB) DH PCIe x16 Graphics Card	SG764AA
	ATI Radeon HD 4650 (1 GB) PCIe x16 Graphics Card	AR956AA
	ATI Radeon HD 5450 (1GB) FH PCIe x16 card	TBD
	NVIDIA GeForce G210 HDMI (512MB) SH PCIe x16 Graphics Card	VN565AA
	NVIDIA GeForce GT230 (1.5GB) PCIe x16 Graphics Card	VH697AA
	NVIDIA GeForce GT315 PCIe x16 Card (PRC only)	VR763AA
	HP DMS59 DVI Dual-head Connector Cable	DL139A
Optical Drives	HP 16X/48X SATA DVD-ROM Drive BLK	AR629AA
	HP 16X SATA SuperMulti DVD Drive BLK	AR630AA
	HP 16X SATA Blu-ray Writer BLK	AR482AA
Security	HP Business PC Security Lock Kit	PV606AA
	HP/Kensington MicroSaver Security Cable Lock	PC766A
	HP Chassis (dc) Security Kit	AR639AA



System Unit Specifications

System Unit	Dimensions (HxWxD)	15.1 x 7.27 x 16.16 in 384 x 185 x 410 mm
	Weight	16.7 lb (7.58 kg)
	Packaging Dimensions (DxLxW)	19.63 x 24.13 x 10.56 in 498.6 x 613 x 268.2 mm
	Shipping Weight	24.77 lb (111.24 kg)
	Temperature	Operating 41° to 95° F (5° to 35° C)
		Non-operating -22° to 149° F (-30° to 65° C)
	Relative Humidity	Operating 10% to 90% (non-condensing at ambient)
		Non-operating 5% to 95% (non-condensing at ambient)
	Shock	Operating 35 G, half-sine
		Non-operating 30 G, half-sine
	Maximum Altitude (unpressurized)	Operating 10,000 ft (3048 m)
		Non-operating 30,000 ft (9144 m)

For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

Unit Environment and Operating Conditions

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 4 in (10.2 cm) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.



System Unit Specifications

Eco-Label Certifications & declarations This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration

HP Pro 3120, Microtower PC, HP Pro 3125 Microtower PC and HP Pro 3130 Microtower PC

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	68.637 W	68.393 W	68.763 W
Sleep (Energy Star low power mode)	2.8911 W	3.0913 W	2.8888 W
Off	1.0867 W	1.2908 W	1.0597 W
Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	235 BTU/hr	234 BTU/hr	235 BTU/hr
Sleep	10 BTU/hr	11 BTU/hr	10 BTU/hr
Off	4 BTU/hr	4 BTU/hr	4 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.8	33
Fixed Disk (random writes)	4.4	34

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 0% post consumer recycled plastic (by wt.)
- This product is 90% recyclable when properly disposed of at end of life.

Packaging Materials

- External:



System Unit Specifications

- Corrugated Carton 1405 g
- Internal:
 - EPS (Expanded Polystyrene) 85 g
 - Other Plastics Unknown 6.3 g
 - Polyethylene low density 3.2 g
 - Polystyrene 6.8 g
- The Corrugated Carton packaging material is made from 85% recycled content.
- The EPS (Expanded Polystyrene) packaging material is made from 85% recycled content
- The Other Plastics Unknown packaging material is made from 85% recycled content
- The Polyethylene low density packaging material is made from 85% recycled content
- The Polystyrene packaging material is made from 85% recycled content

RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at:

http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
- Nickel finishes that release greater than 0.5 micro-grams/cm²/week, measured according to EN 1811:1998, are not used on any product surface designed to be frequently handled or touched by users.

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.



System Unit Specifications

- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Copyright © 2011 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows Vista, and Windows 7 are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, Core, Pentium and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Phenom, Athlon and Sempron are registered trademarks or trademarks of AMD Corporation in the U.S. and/or other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

