

Overview

The HP StorageWorks 2000fc G2 Modular Smart Array (MSA2000fc) represents the newest Fibre Channel model of the MSA2000 family (which includes the MSA2000i G2 iSCSI and the MSA2000sa G2 SAS connected models), a new generation of HP storage arrays specifically designed for entry-level customers and features the very latest in functionality and technology at highly affordable price points.

The MSA2000fc G2 is a 4 Gb Fibre Channel connected 2U storage area network (SAN) or direct connect solution (OS dependent) designed for small to medium size departments or remote locations. The controller-less chassis is offered in two models - one comes standard with twelve Large Form Factor (LFF) 3.5-inch drive bays, the other can accommodate twenty-four Small Form Factor (SFF) 2.5-inch drives (common with ProLiant). Both are able to simultaneously support enterprise-class SAS drives and archival-class SATA drives. The chassis can have one or two MSA2300fc G2 controllers.

The MSA2000fc G2 is all about the ability to choose the proper configuration to fit individual needs. The user can opt for the 24-drive bay SFF chassis for the highest spindle counts in the most dense form factor, or go for the 12 drive bay LFF model to max out total capacity. Choose a single controller unit for low initial cost with the ability to upgrade later; or decide on a model with dual controllers for the most demanding entry-level situations. Capacity can easily be added when needed by attaching additional drive enclosures. Maximum capacity ranges with LFF drives up to 36 TB SAS or 120 TB SAS MDL or SATA with the addition of the maximum number of drive enclosures. Configurations utilizing the SFF drive chassis and the maximum number of drive enclosures can grow to 29.7 TB of SAS or 49.5TB SAS MDL or SATA MDL with a total of ninety-nine drives. The MSA2000fc G2 has been fully tested up to 64 hosts. **NOTE:** [There are no additional hidden charges, licenses or fees as you add enclosures or hosts and users.](#)

The new Fibre Channel G2 model has grown in other aspects too. Optional snapshot capability has been increased to 255 snaps on the G2 models, and LUN support has grown up to 512 total volumes in a Dual Controller system. The MSA2000fc G2 also adds support for HP-UX, OpenVMS, Windows, and Linux on powerful Integrity servers.


The MSA2000fc G2 is a member of HP StorageWorks Modular Smart Array offerings, delivering simple and affordable storage technology to meet today's demanding and growing IT needs. These storage solutions offer excellent price/performance and availability features for direct attach configurations (depending on OS), clusters, workgroups and entry-level SAN environments. Each solution is designed to be easy to deploy, to be secure, along with low management costs, while driving rapid return on investment.

What's New


- Offering electronic LTUs for MSA2000 optional software SKUs
-



Overview

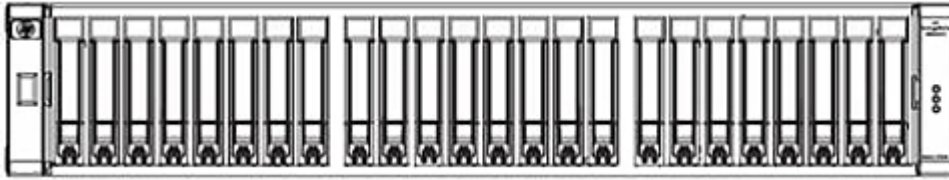

HP StorageWorks 2024fc G2 Modular Smart Array

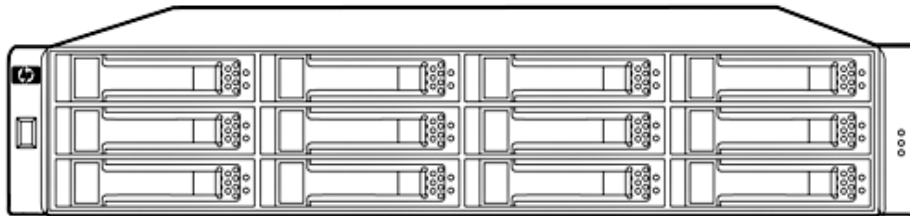

StorageWorks 2012fc G2 Modular Smart Array

Models

StorageWorks 2000fc G2 Controller-less CHASSIS & MSA2300fc G2 FC Controller Modular Smart Array

HP StorageWorks 2012 Modular Smart Array 3.5-in Drive Bay Chassis (LFF) (Will accept one or two controllers or Disk Enclosure I/O modules)	AJ948A
HP StorageWorks 2024 Modular Smart Array 2.5-in Drive Bay Chassis (SFF) (Will accept one or two controllers)	AJ949A
HP StorageWorks 2300fc G2 Modular Smart Array Controller	AJ798A

Disk Enclosures

HP StorageWorks MSA2000 Single I/O 3.5-inch 12 LFF Drive Enclosure (w/ two .6m SAS to SAS cables. If connecting to an MSA2300 G2 controller, SAS to mini-SAS cables are required) Used with single controller array head	AJ749A
HP StorageWorks MSA2000 Dual I/O 3.5-inch 12 LFF Drive Enclosure (w/ two .6m SAS to SAS cables. If connecting to an MSA2300 G2 controller, SAS to mini-SAS cables are required) Used with dual controller array head	AJ750A
HP StorageWorks MSA2000 Drive Enclosure I/O Module (no cable included)	AJ751A
HP StorageWorks MSA70 2.5-inch 25 SFF Drive Enclosure 2.5 in Drive Enclosure (single I/O, single domain) (w/one .5m miniSAS to miniSAS cable)	418800-B21
HP StorageWorks Dual Domain I/O Module for MSA70 enclosure (upgrades MSA70 to dual domain) (w/ one .5m miniSAS to miniSAS cable)	AG779A

MSA2300fc SAN Starter Kits

HP StorageWorks 2312fc G2 Single Controller Modular Smart Array SAN Starter Kit (LFF) (includes single controller, 12-drive bay LFF array head, 8-port 8Gb switch, two 8Gb HBAs, SFPs and cables)	AJ954A
HP StorageWorks 2324fc G2 Single Controller Modular Smart Array SAN Starter Kit (SFF) (includes single controller, 24-drive bay SFF array head, 8-port 8Gb switch, two 8Gb HBAs, SFPs and cables)	AJ955A



Overview

HP StorageWorks 2300fc G2 Modular Smart Array SAN Starter HA Upgrade Kit (includes additional single controller, 8-port 8Gb switch, two more 8Gb HBAs, SFPs and cables) For upgrading AJ954A or AJ955A to dual controller, high availability configurations	AJ956A
Configured Units	
HP StorageWorks 2312fc G2 Dual Controller Modular Smart Array (LFF) (Pre-configured with two array controllers)	AJ795A
HP StorageWorks 2324fc G2 Dual Controller Modular Smart Array (SFF) (Pre-configured with two array controllers)	AJ797A
Controller-less Chassis: DC-powered units	
HP StorageWorks 2012 Modular Smart Array 3.5-in Drive Bay DC-power Chassis (LFF) (can add one or two MSA2300fc G2 controllers or MSA2000 JBOD I/O modules)	AJ950A
HP StorageWorks 2024 Modular Smart Array 2.5-in Drive Bay DC-power Chassis (SFF) (can add one or two MSA2300fc G2 controllers. No MSA2000 JBOD I/O module support)	AJ951A
Controller-less Carrier Grade Chassis	
HP StorageWorks 2024 Modular Smart Array 2.5-in Drive Bay Carrier-Grade Chassis (SFF)	AM337A
Related Option	
HP StorageWorks 2000fc Modular Smart Array Controller (limited use) (for use only with an AJ948A LFF chassis for those needing to configure an older MSA2012fc. Only supports older features, functionalities. No SFF or MSA70 JBOD support, max 48 LFF drives, max 64 snaps; no HP-UX, OpenVMS, or Integrity server support)	AJ744A



Features and Benefits

HP MSA2000fc G2 Models At a Glance:

- High performance Modular Smart Array controller(s), each with two 4Gb Fibre Channel ports
- Single or dual controller capability
- 1 GB transportable cache per controller - battery-free cache backup with super capacitors and compact flash
- 512 LUNs with LUN size up to 16TB
- 2U rack mount chassis combining both the controller and disk shelf
- Twelve 3.5-inch or twenty-four 2.5-inch dual-ported SAS, SAS MDL or SATA MDL drive bays (supports mixing of drive types in a single shelf)
- Supports expansion to 4 additional LFF enclosures for a total of 60 LFF disks
- Supports expansion to 3 additional SFF enclosures (MSA70) for a maximum total of 99 SFF disks
- Redundant power supplies and fans are standard
- RAID levels 0, 1, 3, 5, 6, 10, 50
- Non-disruptive on-line controller code upgrade (requires dual controllers w/ multi-pathing software)
- Heterogeneous support for 32-bit and 64-bit Windows, Red Hat and SuSE Linux, and HP-UX
- Windows Server 2008 x64 Hyper-V, VMware
- Qualified and certified for Windows, Linux, and HP-UX and OpenVMS clustering
- Optional controller-based snapshot and clone functionality

HP MSA2024fc G2 Carrier-Grade Components

HP StorageWorks 2024 Modular Smart Array 2.5-in Drive Bay Carrier-Grade Chassis

AM337A

The MSA2000fc G2 is a 4 Gb Fibre Channel connected 2U storage area network (SAN) or direct connect solution designed for network equipment providers (NEPs) and communication service providers. Suited for those who need a robust telecom infrastructure--- they need storage devices to catch videos, photos, text, new services-- -need a place to have the data stored and cached.

The MSA is a high-quality entry-level FC array, ideal for customers with limited budgets.

The HP MSA2024 Carrier-Grade Chassis (AM337A) is a controller-less chassis capable of supporting one or two MSA2300fc G2 Fibre Channel controllers (AJ798A) and has twenty-four Small Form Factor (SFF) drive bays. It comes equipped with two DC-power power supplies.

When used in conjunction with the Seismic cabinet (AH343A) and specific ProLiant SFF SAS drives, the solution is NEBS certified. NEBS level-3 certification provides the assurance that the equipment is safe to operate and sturdy enough to withstand certain physical (for example, acoustics) and environmental (for example, fire, earthquakes) conditions.

Maximum capacity is achieved with twenty-four 146 GB drives yielding 3.5 TB in 2U of rack space. No JBODs or disk enclosures are part of the NEBS certification. This Storage array augments HP's Carrier-Grade portfolio of solutions and will attach to both the Bladeserver and ProLiant carrier-grade rack mount servers.

Certifications Controller

NEBS Level 3 (GR-63 and GR-1089), Seismic Zone 4

HP StorageWorks 2300fc G2 Modular Smart Array Controller (1 or 2)

AJ798A



Features and Benefits

Qualified Drives	HP 72GB 3G SAS 15K SFF DP ENT HDD	418371-B21
	HP 146GB 3G SAS 10K SFF DP ENT HDD	418367-B21
	HP 300GB 3G SAS 10K SFF DP ENT HDD	492620-B21
Racking	Order stand-alone or to be racked in HP seismic rack	
Mezz Card (HBA)	QLogic for BL460c	
	QLogic for BL860c	
Supported Interconnect	c7000-cg - Brocade SAN 4/12 and 4/24	
	For more information on HP Carrier Grade Platforms go to http://www.hp.com/products1/servers/carrier_grade/index.html?jumpid=reg_R1002_USEN	



Family Information

	MSA2000fc G2	MSA2000i	MSA2000sa	Comparison w/ EVA4400
Capacity Minimum / with maximum additional drive enclosures	LFF: 7.2 TB SAS or 24 TB SAS MDL or SATA w/ 4 drive enclosures: 36 TB SAS or 120 TB SAS MDL or SATA MDL SFF: 7.2 TB SAS, 12TB SAS MDL or 12 TB SATA w/ 3 MSA70 JBODs: 29.7 TB SAS, 49.5TB SAS MDL or SATA MDL	LFF: 7.2 TB SAS or 24 TB SAS MDL or SATA w/ 4 drive enclosures: 36 TB SAS or 120 TB SAS MDL or SATA MDL SFF: 7.2 TB SAS, 12TB SAS MDL or 12 TB SATA w/ 3 MSA70 JBODs: 29.7 TB SAS, 49.5TB SAS MDL or SATA MDL	LFF: 7.2 TB SAS or 24 TB SAS MDL or SATA w/ 4 drive enclosures: 36 TB SAS or 120 TB SAS MDL or SATA MDL SFF: 7.2 TB SAS, 12TB SAS MDL or 12 TB SATA w/ 3 MSA70 JBODs: 29.7 TB SAS, 49.5TB SAS MDL or SATA MDL	LFF: 5.4 TB FC or 12 TB FATA w/ 8 drive enclosures 43 TB FC or 96 TB FATA (LFF only)
Controller Cache	1 GB per controller	1 GB per controller	1 GB per controller	2 GB per controller
Total LUNs	512	511	512	1024
Host connect MSA2000 have 1 or 2 controllers, EVA has 2 controllers standard	Two 4 Gb Fibre Channel ports per controller	Two 1 GbE iSCSI ports per controller	Four 3 Gb SAS ports per controller	Two 4 Gb Fibre Channel ports per controller (Ten w/switch)
Maximum Drives w/ expansion	60 LFF/99 SFF	60 LFF/99 SFF	60 LFF/99 SFF	96
Maximum host supported	64	32	64**	512
Snapshot, clone	Snapshot (max 255) clone	Snapshot (max 255) clone	Snapshot (max 255) clone	Snapshot, clone, remote data replication
Use for Storage	Primary Storage with SAS. Secondary with SATA	Primary Storage with SAS. Secondary with SATA	Primary Storage with SAS. Secondary with SATA	Primary Storage with FC Secondary with FATA

NOTE: maximum available storage capacity depends on the RAID level being implemented, and is based on maximum number of LUNs and LUN size.

** Supports up to 8 hosts with SAS direct connect and 64 hosts (BladeSystem servers) using 3Gb SAS BL switch

Product Technology

4 Gb Fibre Channel technology

Two host ports per controller, shipped with SFPs. the MSA2000fc G2 controller can run in either point-to-point or FCAL (loop). The default is FCAL which is used in Direct Connect, particularly with two controllers. The PtP (fabric) mode is used with almost all switches.

Modular Chassis

2U rack height. 12 Large Form Factor or 24 Small Form Factor drive bays, accommodating SAS and SATA. Comes with space for one or two controllers, or MSA2000 3.5-inch disk Enclosure I/O modules (LFF chassis only)

Drives available

The new MSA2000fc G2 controller supports either the MSA2 3.5-inch Large Form Factor (LFF) drives, or the HP ProLiant 2.5-inch Small Form Factor (SFF) drive
Serial Attached SCSI (SAS) enterprise-class drives designed for high volume, 24x7 usage.
SAS MDL and SATA MDL are usually reserved for archival of data as they are



Family Information

both relatively inexpensive and are available in very large capacities. The MSA2000 family of arrays can accommodate SAS, SAS MDL and SATA drives within the same enclosure making it ideal to have both business-critical, high activity files on SAS drives while using Snapshot or clone capability to keep back-up or archival data on the less expensive drives.

For investment protection, the MSA2300fc G2 controller will support single port SAS & SATA drives in a single-domain MSA70. This support allows current owners of MSA70s to migrate their single port drives (in their MSA70 only, not into the array head) to be attached to an MSA2300fc. They can only cascade to another single I/O MSA70. This is not a data-in-place transition.

SAS drive performance can be approximately 30% greater than SATA performance on sequential host I/O. SAS performance excels in sequential lower latency response time and random I/O per second transaction performance due to higher rpm disk speeds yielding lower seek times. SAS drive random performance is generally twice that of SATA drives.

NOTE: MSA2 3.5-inch Large Form Factor (LFF) drives are for use only in the MSA2000 family. The 2.5-inch Small Form Factor (SFF) drives are supported only with the MSA2300fc G2 controller and are common with and are the same part numbers as the ProLiant optional 2.5-inch drives.

Optional Disk enclosures Just as the user has a choice of chassis for the array head (LFF and SFF drive bays), so also do they have a choice of expansion disk enclosures accommodating either drive size. (**NOTE:** these are not supported as part of a NEBS-certified with the MSA Carrier Grade Chassis.)

MSA2000 3.5-inch drive enclosure. This 2U unit has twelve LFF (3.5-inch) drive bays and accepts for MSA2 dual-ported SAS and SATA drives. One model (AJ749A) has a single I/O module that matches with a single controller array head, giving a single path to the drives. The second model (AJ750A) comes standard with two I/O modules installed, required when paired with a dual controller array head, giving two paths to the drives for higher availability.

- This 3.5-inch drive enclosure can be attached to either the MSA2312fc G2 or MSA2324fc G2 array head. In addition it continues to support the MSA2000i and MSA2000sa.
- Each model ships standard with two .6m SAS to SAS cables for cascading to other MSA2000 drive enclosures
- For connection to either form-factor MSA2300fc array head, miniSAS to SAS cable(s) must be purchased.
- The single I/O model can be upgraded to a dual model with the purchase of an additional MSA2000 Drive Enclosure I/O module (AJ751A). No cable is included with this upgrade.
- Up to four MSA2000 3.5-inch enclosures can be attached to an MSA2300fc G2 controller in the array head.

MSA70 2.5-inch drive enclosure. This 2U storage enclosure (418800-B21) is designed to support twenty five ProLiant 2.5-inch Universal form factor (SFF) SAS or SATA hard drives. It ships standard with a single I/O module installed.

- This 2.5-inch drive enclosure can only be attached to an MSA2324fc G2 controller (SFF) array head. It can also be attached to the MSA2312fc (LFF) or the MSA2000i G2 or MSA2000sa G2 models. The latest firmware is required.



Family Information

	<ul style="list-style-type: none">• The MSA70 enclosure ships with a single .5m miniSAS to miniSAS cable.• To support a dual controller MSA2124fc G2 array head, the user needs to purchase and install an MSA70 Dual Domain I/O Module (AG779A). This option ships standard with an additional .5m miniSAS to miniSAS cable.• Up to three MSA70s may be attached to the array head, given total support for 99 SFF drives.
Scalability	<p>The MSA2300fc G2 controller is designed to allow an installation to begin with smaller capacity and be able to grow gradually as needed. The flexibility of SAS or SATA drive technology, form factors, sizes, speeds, and costs per GB allows a system to easily fit in almost any budget.</p> <ul style="list-style-type: none">• Large Form Factor configurations can scale up to 7.2 TB SAS or 24 TB SAS MDL or SATA, expandable to 36 TB SAS or 120 TB SAS MDL or SATA with the addition of a maximum of four MSA2000 3.5-inch Drive Enclosures.• Small Form Factor configurations can scale from 7.2 TB SAS, 12TB SAS MDL or 6 TB SATA. With the addition of three MSA70 JBODs, the MSA2324fc G2 can support 29.7 TB SAS, or 49.5TB SAS MDL or SATA MDL.• Users may configure a 24-drive MSA2324fc G2 SFF array head with up to three 12-drive LFF MSA2000 3.5-inch disk enclosures. This is an excellent method for a configuration that support fast SFF enterprise-class SAS drives in the array head, combined with economical LFF drives staged for archival purposes, all in the same array.• Qualification of larger capacity drives is ongoing.
LUNs	<p>The MSA2000 family of arrays supports 512 LUNs (total volumes in a dual controller system) and LUN sizes up to 16 TB. The array supports expansion and deletion of any LUN.</p>
RAID 0, 1, 3, 5, 6, 10, 50	<p>In addition to the usual RAID levels, the MSA2000 family features several important additional levels. RAID 6 is the highest level of RAID protection. It allocates two sets of parity data across drives and allows simultaneous write operations. It can withstand two simultaneous drive failures without downtime or data loss. RAID 10 is mirroring and striping without parity. It is the most popular of the multiple RAID levels, allowing large arrays with high performance in most cases and superior fault tolerance. RAID 50 combines the block striping and parity of RAID 5 with the straight block striping of RAID 0, yielding higher performance than RAID 5 through the addition of RAID 0, particularly during writes.</p>
Performance	<p>Performance numbers are a guideline as established by tests using RAW I/O in an Operating System Agnostic test lab environment. A total of 96 72GB 15K SAS drives were used in a dual controller configuration of eight 12 Disk vdisks, eight 806 GB volumes, and two volumes per host. Four hosts directly attached to the MSA2000fc G2 were used in this test configuration (results cannot be expected with a single host). Results were achieved in Sequential Writes with 256K blocks; all random tests were based on 8K block sizes.</p> <p>NOTE: Number and type of applications, drive type and number of drives, operating system used, and the number of hosts will affect overall performance.</p>



Family Information

MSA2 G2 Performance	MSA2300fc G2	MSA2000sa G2	MSA2000i G2
Protocol (host connect)	4 Gb Fibre Channel	3 Gb SAS	1 GbE Ethernet
MSA2000 RAID 10 Performance Results			
Random Reads IOPs	22,874	21,861	13,658
Random Writes IOPs	15,008	14,491	14,399
Random Mix IOPs 60/40 read/write	17,878	17,700	13,493
Sequential Reads MB	1,238	1,050	274
Sequential Writes MBs	532	532	266
MSA2000 RAID 5 Performance Results			
Random Reads IOPs	22,044	21,000	12,335
Random Writes IOPs	2,714	2,714	2,714
Random Mix IOPs 60/40 read/write	5,325	4,926	5,325
Sequential Reads MBs	1,238	1,050	274
Sequential Writes MBs	725	617	266
MSA2000 RAID 6 Performance Results			
Random Reads IOPs	21,975	21,000	12,292
Random Writes IOPs	1,876	1,876	1,876
Random Mix IOPs 60/40 read/write	4,293	3,865	3,851
Sequential Reads MBs	1,238	1,050	274
Sequential Writes MBs	772	729	266

DC-power chassis

HP is making the two models of controller-less chassis available with direct current (DC) power supplies. They each have the two empty bays where users can insert one or two MSA2300fc G2 controller(s). In addition, the MSA2012 LFF drive bay can have MSA2000 3.5-inch I/O modules inserted to create a LFF DC-power JBOD.

The 500 watt power supply is designed to operate over the input range of -40VDC to -75VDC. This is specifically intended to conform to Telco requirements. Certification is in process but no claims are made at this time.

HP StorageWorks 2012 Modular Smart Array 3.5-in Drive Bay DC-power Chassis (LFF) AJ950A

HP StorageWorks 2024 Modular Smart Array 2.5-in Drive Bay DC-power Chassis (SFF) AJ951A

Configuration and Management Tools

HP StorageWorks MSA Storage Management Utility (SMU). Management access, out-of-band: WEB GUI, CLI. Interface Types: Mini DB9 RS232, 10/100 Ethernet Protocols Supported SNMP, SSL, SSH, SMTP, HTTP, Telnet

Hot Plug Expansion and Replacement Support

All MSA2000 models support hot plug expansion and replacement of redundant controllers, enclosures, fans, power supplies, and I/O modules for simple, fast installation and maintenance.

Snapshot and Clone

Optional controller based functionality. Offers higher levels of data protection, enabling an almost instant recovery from data failure or corruption. Offers alternative development testing of 'offline' production data and the ability to backup snapped/cloned data.



Family Information

Overview	<p>The MSA2000fc G2 comes integrated with web browser based software for storage and RAID management, setup, configuration and troubleshooting. This reduces the cost of ownership by reducing the training and technical expertise necessary to install and maintain your HP storage solution.</p> <p>The SPOCK database provides interoperability information for thousands of components and millions of component combinations. It is available to all users on the HP.com website. http://www.hp.com/storage/spock</p>
Server Compatibility	<p>Supports most HP ProLiant and Integrity servers including</p> <ul style="list-style-type: none"> • HP ProLiant DL, ML • HP ProLiant c-Class Blade Servers • Integrity servers, IA64 & PA Risc
Industry Standard X86 servers support	<ul style="list-style-type: none"> • Supports most multi-vendor industry standard 32-bit Intel and AMD based (x86) servers. HP requires the Third-Party Server to be logo'd and listed on the Microsoft Windows Server Catalog. • Refer to the Microsoft website: http://www.microsoft.com/windows/catalog/server/ • HP StorageWorks Division recommends that the Third-Party Server Vendor is an active member of TSANet. Refer to the TSANet website for details: www.tsanet.com
OS Support (x86)	<ul style="list-style-type: none"> • Microsoft Windows Server 2008 IA32, x64, IA64 (Standard, Enterprise, Datacenter) • Microsoft Windows 2003 and 2003 R2 IA32, x64, IA64 • Red Hat Linux (32/64) • SuSE SLES (32/64) • Microsoft Windows Server 2008 x64 Hyper-V • VMware ESX 3.0.1, 3.0.2, 3.5 • Citrix XenServer HP Enterprise Edition • Red Hat Virtualization
OS Support (Integrity, HP9000)	<ul style="list-style-type: none"> • HP-UX 11i V3 Integrity, HP9000 • HP-UX 11i V2 Integrity, HP9000 • OpenVMS 8.3. OpenVMS 8.3-1H1
Web Browser support	<ul style="list-style-type: none"> • MSA2000 support target based management, and includes a Web interface and a telnet interface, and requires a web browser for management. Only Microsoft Internet Explorer V6.X and above (Internet Explorer V7.X is strongly encouraged), and Mozilla Firefox 1.0.7 or later are supported
HP Insight Control Storage Module for vCenter	<p>HP Insight Control Storage Module for vCenter</p> <p>HP Insight Control Storage Module for vCenter allows customers who are using vCenter to better monitor and manage the storage associated with VMware virtual machines. HP StorageWorks can be added to vCenter, allowing vCenter administrators to list LUN/volume connections, determine the storage attributes associated with virtual machines, and monitor the status and health of the arrays.</p> <p>Features and Benefits:</p> <ol style="list-style-type: none"> 1. Monitor the status and health of HP StorageWorks arrays: Administrators managing their virtual machine environment can get additional information about the health and status of their HP arrays. This information helps in diagnosing problems, and communicating with storage administrators on the various storage requirements for the virtualized environment. 2. Manage LUN / volume connections from VMs and ESX servers to the arrays: As administrators manage virtual machines, it is often very important that they know exactly what storage is connected to each, and the location and attributes of that storage within the SAN. This allows for much more intelligent decisions about VM movement and placement, and also an increased understanding of what kind of storage is being used.



Family Information

3. Understand which storage features are available: Often when allocating storage for a virtual machine administrators need to match the characteristics of the VM with the attributes of the storage. A great example is that a "critical" VM would need highly available storage, whereas a "temp" VM could use non-protected storage. This feature will tell the administrators what "type" of storage is available to simplify their communication with the storage administrator (or to easily make the change themselves in smaller businesses).



Optional Software

MSA2300 Snapshot and Volume Copy Software

Product Features

Data Protection

- Snapshots create up to 255 point-in-time pictures of data
- Volume Copies create up to 128 point-in-time copies of data
- Recovery is instant - revert data from any previous Snapshot or Volume Copy
- Backup 'snapped' data to disk, virtual tape, or physical tape without a backup window

Data Testing

- Snap or clone data to test the performance of a software application on 'offline' production data
- Snap or clone data to test how a software patch or enhancement will function on 'offline'; production data

HP StorageWorks 2000 Modular Smart Array Snapshot 255 Software LTU ¹	T5539A
HP StorageWorks 2000 Modular Smart Array Snapshot 255 Software E-LTU ¹	T5539AAE
HP StorageWorks 2000 Modular Smart Array Snapshot 64 Software LTU	T5512A
HP StorageWorks 2000 Modular Smart Array Snapshot 64 Software LTU	T5512AAE
HP StorageWorks 2000 Modular Smart Array Snapshot 8 Software LTU	T5513A
HP StorageWorks 2000 Modular Smart Array Snapshot 8 Software LTU	T5513AAE
HP StorageWorks 2000 Modular Smart Array Snapshot 8/255 Upgrade Software LTU ¹	T5540A
HP StorageWorks 2000 Modular Smart Array Snapshot 8/255 Upgrade Software LTU ¹	T5540AAE
HP StorageWorks 2000 Modular Smart Array Snapshot 64/255 Upgrade Software LTU ¹	T5541A
HP StorageWorks 2000 Modular Smart Array Snapshot 64/255 Upgrade Software LTU ¹	T5541AAE
HP StorageWorks 2000 Modular Smart Array Snapshot 8 to 64 Upgrade Software LTU	T5515A
HP StorageWorks 2000 Modular Smart Array Snapshot 8 to 64 Upgrade Software LTU	T5515AAE
HP StorageWorks 2000 Modular Smart Array Volume Copy Software LTU	T5514A
HP StorageWorks 2000 Modular Smart Array Volume Copy Software LTU	T5514AAE

¹ The snapshot software is supported on the MSA2324 and MSA2312 (G2) models only

Path failover (MPIO)

MPIO Basic Failover for Windows provides a single multi-path solution for HP StorageWorks MSA2000fc Modular Smart Array on HP ProLiant servers by providing basic path failover. Supports Windows 2003, Windows 2003 R2, and Windows 2003 X64 operating systems.

- HP MPIO Full Featured DSM for MSA2000fc v2.2.0.22
- Microsoft Windows 2008: Microsoft MPIO is bundled with Windows Server 2008 and must be installed as an operating system feature.
- Failover support for Linux is with Device Mapper 4.0.
- HP-UX PV-Links

HP StorageWorks Storage HP StorageWorks Storage Mirroring Software provides host-based, continuous replication for customers



Optional Software

Mirroring

seeking a low-cost alternative to fabric or array-based replication. Patented replication and failover technology continuously captures byte-level data changes as they happen and replicates those changes to one or more target servers at any location without geographic limitations. By replicating only the bytes that change, Storage Mirroring Software uses the absolute minimum bandwidth on your existing LAN or WAN to replicate your data. Storage Mirroring also provides server failover where a production server can automatically be 'replaced' by the storage mirroring server in the event of failure. Couple Storage Mirroring with MSA2000 Snapshots and/or Volume Copy to achieve an Enterprise class data protection strategy creating different data recovery points using continuous data protection with Storage Mirroring and point-in-time data protection with Snapshots and/or Volume Copy. Storage Mirroring Software supports:

- Any DAS, NAS, and SAN storage device.
- Any Windows or Linux ProLiant server including all ML, DL, and BL platforms
- Many Windows platforms including Windows Server 2000, Windows Server 2003, Windows Server 2003 R2, Windows Storage Server 2003, Windows Storage Server 2003 R2, 64bit Windows, and Windows on Itanium
- Some Linux platforms including Red Hat Linux Enterprise 4.4-4.6, 5.x

For more information visit <http://h18006.www1.hp.com/products/storage/software/sm/index.html>

HP StorageWorks Storage Mirroring Software Windows Server Edition 1 LTU	T5438A
HP StorageWorks Storage Mirroring Software Windows Enterprise Server Edition 1 LTU	T5440A
HP StorageWorks Storage Mirroring Software Windows NAS Edition 1 LTU	T5442A
HP StorageWorks Storage Mirroring Software for AiO Edition 1 LTU	T5446A
HP StorageWorks Storage Mirroring Software for 5 Virtual Machines 1 LTU	T5444A
HP StorageWorks Storage Mirroring SW Linux 1 LTU	T5448A
HP StorageWorks Storage Mirroring Virtual Infrastructure 1 LTU	T5450A

NOTE: For more information visit

<http://h18006.www1.hp.com/products/storage/software/sm/index.html>

HP StorageWorks X3000 Network Storage Gateways:

Add more value to your MSA array

Stretch your MSA2000 array investment by adding file & print services, iSCSI connectivity, and management hosting with an X3000 Series Network Storage Gateway platform. X Series Network Storage Gateways are optimized file and print server solutions that are built on industry-standard HP ProLiant servers and come with Microsoft Windows Storage Server 2008 operating system pre-installed. Since they're Windows-based, network integration is easy, your tools and data protection applications run right on the box, and management has a familiar look and feel. Like many Network Attached Storage (NAS) devices, they support heterogeneous file serving environments and are pre-configured to install in minutes.

An X3000 Network Storage Gateway is a file/iSCSI gateway that adds IP-based services to your Fibre Channel array or SAN. So it not only enhances your MSA investment with file and print services, but it helps you save even more by enabling tiered (Fibre Channel and iSCSI) block access for application servers. All of your important client and server data can be managed, scaled, and protected on a single MSA2000 array.

NOTE: For more information visit: www.hp.com/go/X3000

HP StorageWorks X3400 Network Storage Gateway	AP796A
HP StorageWorks X3800 Network Storage Gateway	AP797A



Optional Software

HP ProLiant DL380 G5 SAN Gateway Storage Server	AG771B
NOTE: Microsoft Windows Unified Data Storage Server 2003 Enterprise x64 Edition O/S with file/print, iSCSI, and cluster services on a 2U rack form factor platform. For more information, go to: http://h18006.www1.hp.com/products/quickspecs/12559_div/12559_div.html	
HP ProLiant SB460c SAN Gateway Storage Server	AN583A
NOTE: Microsoft Windows Unified Data Storage Server 2003 Enterprise x64 Edition O/S with file/print, iSCSI, and cluster services on a blade form factor platform. For more information, go to: http://h18006.www1.hp.com/products/quickspecs/13114_div/13114_div.html	
Fibre Channel HBA options for DL380 G5 Storage Servers	
HP StorageWorks FC2142SR 4Gb PCIe HBA	A8002A
HP StorageWorks FC2242SR Dual Channel 4 Gb PCIe HBA	A8003A
HP StorageWorks FC1142SR 4Gb PCIe HBA	AE311A
HP StorageWorks FC1242SR Dual Channel 4 Gb PCIe HBA	AE312A
HP StorageWorks 81Q PCI-e FC HBA	AK344A
HP 82Q 8Gb Dual Port PCI-e FC HBA	AJ764A
HP StorageWorks 81E 8Gb SP PCI-e FC HBA	AJ762A
HP 82E 8Gb Dual-port PCI-e FC HBA	AJ763A
Fibre Channel HBA options for the SB460c SAN Gateway Storage Server	
Emulex LPe1105 FC Dual Channel 4Gb, PCI-E-to-Fibre Channel Host Bus Adapter	403621-B21
QLogic QMH2462 4Gb FC HBA for HP c-Class BladeSystem	403619-B21



Service and Support, HP Care Pack, and Warranty Information

Warranty

- Three-year limited warranty, parts exchange Next Business day delivery

Enclosures, Hard drives, and Options for the MSA2000fc carry their own warranty. Refer to HP's Limited Warranty Statement for more information.

The MSA2000fc has been designed with customer self repairable parts to minimize repair time and provide greater flexibility in performing defective parts replacement. Please refer to HP's limited warranty Statement and parts replacement instructions for further details.

<http://h18006.www1.hp.com/products/storageworks/warranty.html>

Products included in various Kits carry their own individual warranties.

NOTE: The warranty of the hard drive options purchased with the MSA2000fc product is different for SAS hard drives versus SATA hard drives. SAS hard drive options have a three year warranty and SATA hard drives options have a one year warranty.

HP Care Pack Services: Packaged server and storage services for increased uptime, productivity and ROI

When you buy HP server and storage products and solutions, it's also a good time to think about what levels of support you may need. Our portfolio of service options reduce deployment and management worries while helping you get the most out of your server and storage investments. We take a holistic approach to your environment, bridging servers, blades, storage, software and network infrastructures with our packaged HP Care Pack Services for servers and storage.

Protect your business beyond warranty

When it comes to robustness and reliability, standard computing equipment warranties have matured along with technology. Good news that can also create problems stemming from depending on standard warranties designed to only protect against product defects and some downtime causes. Using a standard approach to warranty uplifts, such as HP Care Pack Services, helps reduce downtime risks and provides operational consistency for mission-critical and standard business computing.

HP Care Pack Services: Upgrading or extending standard server and storage warranties cost effectively

HP Care Pack Services offer a standard reactive hardware and software support services suite sold separately, or combined with our Support Plus and Support Plus 24 services. The portfolio also provides a combination of integrated proactive and reactive services, such as Proactive 24 Service and Critical Service. In addition with HP Proactive Select, you can acquire the specific proactive constancy and technical services. HP Proactive Select menu offers a broad set of service options that you can mix and match depending on your specific requirements. Proactive service options include offers for server, storage, network, SAN device, software, environment and education services.

HP server and storage lifecycle support services offers a full spectrum of customer care-from technology support to complex migrations to complete managed services. HP Factory Express provides customization, integration and deployment services for turnkey solutions. HP Education Services offer flexible, comprehensive training on to help your IT staff get the most out of your server and storage investments. HP Financial solutions extend innovative financing and cost-effective asset management programs-from purchase to equipment retirement.

Learn more: www.hp.com/services/servers and www.hp.com/services/storage

NOTE: Care Pack Services availability may vary by product and country.

HP Care Pack Services are sold by HP and HP Authorized Service Partners:

- Services for customers purchasing from HP or an enterprise reseller are quoted using HP order configuration tools.
- Customers purchasing from a commercial reseller can find HP Care Pack Services at <http://www.hp.com/go/lookuptool>



Service and Support, HP Care Pack, and Warranty Information

Recommended HP Care Pack Services for optimal satisfaction with your HP product.

3-Year HP Support Plus 24

For a higher return on your server and storage investment, HP Support Plus 24 provides integrated hardware and software support services designed specifically for your technology. Available 24x7, this 3-year combined reactive support option delivers onsite hardware support and over-the-phone software support around-the-clock. Leverage the full strength of HP Technology Services - customers can trust the services professionals at HP to work collaboratively with them, putting our strategic and technical know-how to work across their entire infrastructure.

- Improve uptime with responsive hardware and software services
- Enjoy consistent service coverage across geographically dispersed sites
- Update HP software at a predictable cost
- Increase customer satisfaction-with no interoperability gaps

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6638EEE>

HP StorageWorks MSA Family Disk Array Installation and Startup Service

For smooth startup, HP StorageWorks MSA Family Disk Array Installation and Startup Service -provides you with a custom-tailored deployment of the MSA Array so that it is properly integrated into your storage environment, and helps you realize the maximum benefit from your storage investment. In today's new era of business technology, technology must produce thousands of business outcomes. Today's HP Technology Services portfolio helps customers manage their technology in action-because when technology works, business works.

- Verification that any service prerequisites are met prior to installation
- Delivery of the service at a mutually scheduled convenient time
- Installation of HP StorageWorks MSA and SAN deployment according to product specification
- Availability of an HP service specialist to answer basic questions during the onsite delivery of this service
- Customized installation plan to support unique configuration requirements

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA0-3048ENW.pdf>

HP Proactive Select Service

HP Proactive Select Service improves your IT performance and manageability through the use of cost effective flexible services. HP provides technical expertise and best practices to accelerate ROI of your technology investment. Selectable proactive services span a wide range of technology and process services - a flexible way to purchase proactive services that fit your particular environment and situation.

HP Proactive Select Service is technology agnostic and purchased in addition to your choice of underlying reactive support.

- Access to a list of flexible and customizable proactive service activities
- Enhance customers' in-house IT team with complementary assistance from HP
- Improved time to solution
- Reduce business risk and project costs by accessing HP specialists
- Simplify IT operational procedures by leveraging HP best practices

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA2-3842ENN.pdf>

Optional HP Care Pack Services that will enhance your HP product experience.

5-Year HP Support Plus 24

As an alternative to our recommended support level, for customers who need to improve uptime with responsive 24x7 product support:

HP Support Plus 24 helps you increase performance and availability with comprehensive, consistent hardware and software services. Working with your IT team, HP Services engineers deliver onsite hardware support and over-the-phone software support around-the-clock 365 days per year. Service coverage encompasses HP products and selected multivendor hardware and software.



Service and Support, HP Care Pack, and Warranty Information

In addition, this convenient HP Care Pack packaged service makes software updates available to you at substantial savings.

Choose Support Plus 24 when you need to:

- Improve uptime with responsive hardware and software services available anytime
- Cost-effectively obtain expert 24x7 multivendor hardware and software support
- Enjoy consistent service coverage across geographically dispersed sites
- Update HP and selected third-party software at a predictable cost
- Take advantage of subscription savings on software updates

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6638EN.pdf>

HP Entry Storage Data Migration Service for Windows

For customers who need to safely migrate Windows data within their TCP/IP networks with minimal impact to their operations:

You have a need to migrate data between Windows servers within your TCP/IP network. Or you have a need to migrate storage for your Windows servers. Or both. And you need to accomplish these migrations efficiently while minimizing risk at the same time.

HP Entry Storage Data Migration Service for Windows offers you a cost competitive and convenient way to accommodate data migration triggered by a need to refresh or consolidate storage, or to create different storage tiers. This service offers a migration cost in line with the costs of storage products in small and medium-sized storage environments. The service is delivered via a skilled HP service specialist with special consideration for data availability, integrity, and ongoing operational performance during the transfer process.

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA2-4734ENW.pdf>

eSupport

HP eSupport is a portfolio of technology-based services that assist you with managing your business environment - from the desktop to the data center.

Support Portal

The HP support portal provides one-stop access to the information, tools and services you need to manage the daily operations of your IT environment.

Features include:

- Access to self-solve tools (including search technical knowledge base)
- Efficient logging and tracking of support cases
- Collaboration with other business and IT professionals
- Download of patches and drivers
- Access to diagnostic tools
- Proactive notification of relevant information

Access to certain features of the support portal requires an HP service agreement. To access the support portal, visit: <http://www.hp.com/support>

HP Insight Remote Support software delivers secure remote monitoring and support for your HP Servers and Storage, 24 X 7, so you can spend less time solving problems and more time focused on your business. You can have your systems remotely monitored for hardware failure using secure technology that's been proven at thousands of companies around the world. In many cases, you can avoid problems before they occur.



Customer Technical Training

HP Education Services

In today's cost-conscious business environment, IT professionals, developers, consultants and users face an interesting challenge: how to keep up with the latest technologies and expand important skills while delivering profitable results on current projects. To help address this challenge, HP offers innovative training solutions that help keep you up-to-date on virtualization, server, storage, Insight Control, Citrix, Microsoft® and open source/Linux-related topics-while spending less time away from business-critical activities.

HP Services Awards


HP Technology Services continues to be recognized for service and support excellence by customers, partners, industry organizations and publications around the world. Recent honors and award reflect our services team's dedications, technical expertise, professionalism and uncompromising commitment to customer satisfaction.

Additional Services Information

To learn more on HP ProLiant servers, HP BladeSystem servers and HP StorageWorks storage products, please contact your HP sales representative or HP Authorized Channel Partner. Or visit:
www.hp.com/services/proliant or www.hp.com/services/bladeSystem or <http://www.hp.com/hps/storage>




Configuration Information

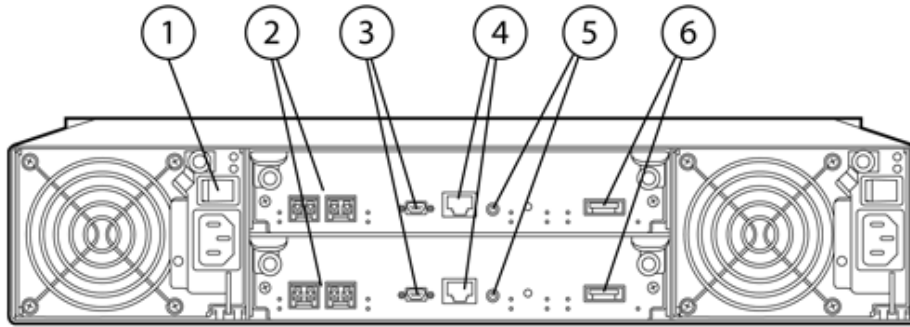

Dual Controller MSA2000fc G2


- | | | |
|------------------------|-------------------|--------------------|
| 1. Power Switch | 3. CLI Port | 5. Service Ports |
| 2. Fibre Channel Ports | 4. Ethernet Ports | 6. Expansion Ports |

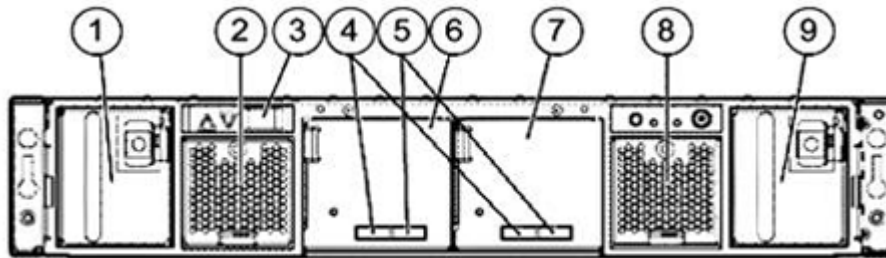

MSA70 Dual I/O 2.5-inch 25 Drive Enclosure

Rear Panel components

- | | | |
|--|----------------------|-------------------|
| 1. Power Supply 1 | 4. SAS in connector | 7. I/O module bay |
| 2. System fan 1 | 5. SAS out connector | 8. System fan 2 |
| 3. Dual 7 segment display board (for future use) | 6. I/O module bay | 9. Power supply 2 |

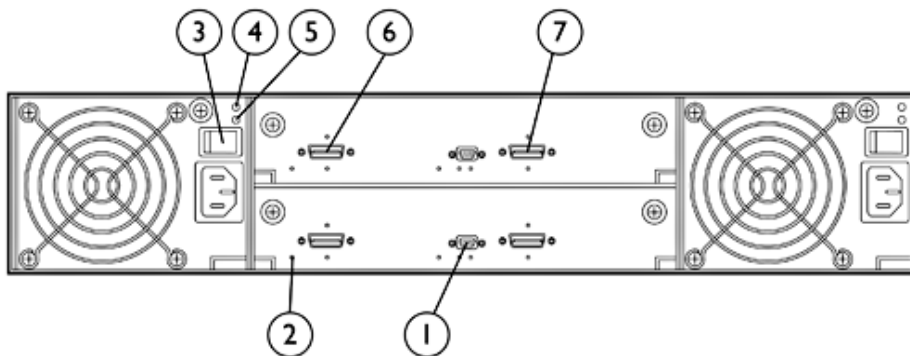

MSA2000 Dual I/O 3.5-inch 12 Drive Enclosure

Rear Panel components

- | | | |
|-----------------|---------------------------|-----------------|
| 1. Service Port | 4. DC Voltage / Fan Fault | 6. SAS In Port |
| 2. Unit Locator | 5. AC Power Good | 7. SAS Out Port |
| 3. Power Switch | | |



Configuration Information

Configure to Order Program Information

HP introduces the new Configure to Order program for the MSA2000 family. The MSA2000 models and options may or may not be factory installed in a rack with add-on controllers, switches, hubs, MSA2000 disk enclosures and hard drives. The MSA2000 arrays may be integrated with ProLiant servers or as standalone storage.

Orders to be shipped through the CTO process must have a minimum of two drives ordered per controller. SAN Starter Kits are not eligible for CTO. The Small Form Factor 300GB drive is not available for rack-level CTO at this time.

Description	Product #
HP StorageWorks 2012 Modular Smart Array 3.5-in Drive Bay Chassis (LFF)	AJ948A#0D1
HP StorageWorks 2024 Modular Smart Array 2.5-in Drive Bay Chassis (SFF)	AJ949A#0D1
HP StorageWorks 2300fc G2 Modular Smart Array Controller	AJ798A#0D1
HP StorageWorks 2312fc G2 Dual Controller Modular Smart Array (LFF)	AJ795A#0D1
HP StorageWorks 2324fc G2 Dual Controller Modular Smart Array (SFF)	AJ797A#0D1
HP 2000fc Modular Smart Array Controller (ONLY for use by those wishing to build an older model MSA2012fc))	AJ744A#0D1
HP MSA2000 3.5in Single I/O 12 Drive Encl	AJ749A#0D1
HP MSA2000 3.5in Dual I/O 12 Drive Encl	AJ750A#0D1
HP StorageWorks 2024 Modular Smart Array 2.5-in Drive Bay Carrier-Grade Chassis	AM337A#0D1
HP StorageWorks 2012 Modular Smart Array 3.5-in Drive Bay DC-power Chassis (LFF)	AJ950A#0D1
HP StorageWorks 2024 Modular Smart Array 2.5-in Drive Bay DC-power Chassis (SFF)	AJ951A#0D1
HP MSA2000 Drive Enclosure I/O Module (for CTO, only available for use in a AJ950A DC-powered chassis)	AJ751A#0D1
3G LFF Serial Attached SCSI (SAS) Hard Drives	
HP MSA2 300GB 3G SAS 15K LFF (3.5 inch) DP ENT HDD	AJ736A#0D1
HP MSA2 450GB 3G SAS 15K LFF (3.5 inch) DP ENT HDD	AJ737A#0D1
6G LFF Serial Attached SCSI (SAS) Hard Drives	
HP P2000 300GB 6G SAS 15K LFF (3.5 inch) DP ENT HDD	AP858A#0D1
HP P2000 450GB 6G SAS 15K LFF (3.5 inch) DP ENT HDD	AP859A#0D1
HP P2000 600GB 6G SAS 15K LFF (3.5 inch) DP ENT HDD	AP860A#0D1
6G LFF Serial Attached SCSI (SAS) Midline (MDL) DP Drives	
HP P2000 1TB 6G SAS 7.2K LFF (3.5 inch) DP MDL HDD	AP861A#0D1
HP P2000 2TB 6G SAS 7.2K LFF (3.5 inch) DP MDL HDD	AW555A#0D1
3G SATA Hard Drives	
HP MSA2 500GB 3G SATA 7.2K LFF (3.5 inch) DP MDL HDD	AJ738A#0D1
HP MSA2 1TB 3G SATA 7.2K LFF (3.5 inch) DP MDL HDD	AJ740A#0D1
HP P2000 2TB 3G SATA 7.2K LFF (3.5 inch) DP MDL HDD	AW556A#0D1



Configuration Information

MSA70	Single I/O, single domain 25 Small Form Factor (SFF) drive bays	418800-B21
MSA70 I/O Module	HP StorageWorks Dual Domain I/O Module Makes the standard MSA70 (above) into a dual I/O, dual domain JBOD NOTE: The I/O Module is a field upgradeable Option Kit the addition of which in the MSA70 will allow dual domain capability providing higher level of redundancy and reliability	AG779A
SAS Drives (SFF 2.5-inch)	3G SFF Serial Attached SCSI (SAS) Hard Drives HP 300GB 3G SAS 10K SFF (2.5 inch) DP ENT HDD HP 146GB 3G SAS15K SFF (2.5 inch) DP ENT HDD 6G SFF Serial Attached SCSI (SAS) Hard Drives HP 72GB 6G SAS 15K SFF (2.5 inch) DP ENT HDD HP 146GB 6G SAS 10K SFF (2.5 inch) DP ENT HDD HP 146GB 6G SAS 15K SFF (2.5 inch) DP ENT HDD HP 300GB 6G SAS 10K SFF (2.5 inch) DP ENT HDD NOTE: Only Dual Port (DP) drives will work as dual-port in a Dual Domain environment. Dual Domain environment requires the HP StorageWorks Dual Domain I/O Module Option (# AG779A). NOTE: 6G SAS drives will only function as 3G drives in a MSA70.	492620-B21 504062-B21 512545-B21 507125-B21 512547-B21 507127-B21
SAS Midline (MDL)	HP 500 GB 6G SAS 7.2K SFF (2.5 inch) DP MDL HDD	507610-B21
SATA Drives (SFF 2.5-inch)	HP 250 GB 3G SATA 5.4K SFF (2.5-inch) ETY HDD HP 500 GB 3G SATA 7.2K SFF (2.5 inch) MDL HDD NOTE: SATA drives for the MSA70 are not dual port (DP) drives. NOTE: Go to the HP Hard Drive Compatibility table for complete drive compatibility information (http://www.hp.com/products/harddiskdrives). Using hard drives in unsupported configurations will result in voiding the warranty and could result in damage to the drive and/or loss of data.	460355-B21 507750-B21



Configuration Information

Step 1 - MSA2000fc G2 - Base Configuration

Select one:

Model Name	Model Description:	Part Number
HP StorageWorks 2012 Modular Smart Array 3.5-inch Drive Bay Chassis	Controller-less chassis with twelve Large Form Factor (LFF) MSA2 drive bays. Space for two controllers.	AJ948A
HP StorageWorks 2024 Modular Smart Array 2.5-inch Drive Bay Chassis	Controller-less chassis with twenty-four Small Form Factor (SFF) ProLiant drives bays. Space for two controllers.	AJ949A

There are two array-head chassis - one with twelve 3.5-inch large form factor bays, the other with twenty-four 2.5-inch small form factor drive bays. For additional twelve additional drive bays purchase an MSA2000 3.5-inch Disk Enclosure. You may attach a total of four MSA2000 Drive Enclosures for a total of sixty LFF drive bays. For 25 additional SFF drive bays purchase an MSA70 JBOD with the 2nd I/O module. You may attach a total of three MSA70 JBODs for a total of ninety-nine SFF drive bays. Single controller arrays support Single I/O Disk Enclosures; dual controller arrays support Dual I/O Disk Enclosures.

Step 2 - Options

Select each option with quantities specified.

Step 2a - Options

Description with Parts Shipped:	Quantity	Part Number
HP StorageWorks 2300fc G2 Modular Smart Array Controller (for either the LFF MSA2012, SFF MSA2024, or the two DC-powered chassis)	1 or 2	AJ798A

Step 2b SAS, SAS MDL and SATA Drive Options

NOTE: SATA drives are designed for archival or reference data. They should not be used in a heavy or intense I/O environment. Those situations require the use of enterprise-class SAS drives. MSA2 3.5-inch drives are for use only with MSA2000 products.

MSA2 3G Large Form Factor (LFF) SAS drives for MSA2312fc and MSA2000 3.5-inch Disk Enclosure

3G LFF Serial Attached SCSI (SAS) Hard Drives

HP StorageWorks MSA2 300GB 3G SAS 15K LFF (3.5 inch) DP ENT HDD	AJ736A
HP StorageWorks MSA2 450GB 3G SAS 15K LFF (3.5 inch) DP ENT HDD	AJ737A

P2000 6G Large Form Factor (LFF) SAS drives for MSA2312fc and MSA2000 3.5-inch Disk Enclosure

HP P2000 300GB 3G SAS 15K LFF (3.5 inch) DP ENT HDD	AP858A
HP P2000 450GB 3G SAS 15K LFF (3.5 inch) DP ENT HDD	AP859A
HP P2000 600GB 3G SAS 15K LFF (3.5 inch) DP ENT HDD	AP860A

P2000 6G Large Form Factor (LFF) SAS drives for MSA2312fc and MSA2000 3.5-inch Disk Enclosure

HP P2000 1TB 6G SAS 7.2K LFF (3.5 inch) DP MDL HDD	AP861A
HP P2000 2TB 6G SAS 7.2K LFF (3.5 inch) DP MDL HDD	AW555A

MSA2 Large Form Factor (LFF) SATA drives for MSA2312fc and MSA2000 3.5-inch Disk Enclosure

HP StorageWorks MSA2 500GB 3G 7.2K LFF (3.5-inch) DP MDL HDD	AJ738A
HP StorageWorks MSA2 1TB 3G SATA 7.2K LFF (3.5-inch) DP MDL HDD	AJ740A

P2000 Large Form Factor (LFF) SATA drives for MSA2312fc and MSA2000 3.5-inch Disk Enclosure

HP P2000 2TB 3G SATA 7.2K LFF (3.5 inch) DP MDL HDD	AW556A
---	--------



Configuration Information

ProLiant Small Form Factor (SFF) SAS drives for MSA2324fc G2 and MSA70 JBOD

3G SFF Serial Attached SCSI (SAS) Hard Drives

HP 146GB 3G SAS 15K SFF (2.5 inch) DP ENT HDD 504062-B21

HP 300GB 3G SAS 10K SFF (2.5-inch) DP ENT HDD (not supported for rack-level CTO at this time) 492620-B21

6G SFF Serial Attached SCSI (SAS) Hard Drives

HP 72GB 6G SAS 15K SFF (2.5 inch) DP ENT HDD 512545-B21

HP 146GB 6G SAS 10K SFF (2.5 inch) DP ENT HDD 507125-B21

HP 146GB 6G SAS 15K SFF (2.5 inch) DP ENT HDD 512547-B21

HP 300GB 6G SAS 10K SFF (2.5 inch) DP ENT HDD 507127-B21

6G SFF Serial Attached SCSI (SAS) Midline (MDL) Hard Drives

HP 500GB 6G SAS 7.2K SFF (2.5 inch) DP MDL HDD 507610-B21

NOTE: 6G SAS drives will only function as 3G drives in a MSA70 or MSA2024 G2 array.

NOTE: In a single domain environment Dual Port (DP) drives will function as Single Port (SP) drives only.

ProLiant Small Form Factor (SFF) SATA drives for MSA2324fc G2 and MSA70 JBOD

HP 250 GB 3G SATA 5.4K SFF (2.5-inch) ETY HDD 460355-B21

HP 500 GB 3G SATA 5.4K SFF (2.5-inch) MDL HDD 507750-B21

Step 2c - Drive Enclosure Options

Should you want a drive enclosure, the model you choose depends on which array model it attaches to. If it is a single controller array, then choose the JBOD designated as "Single I/O". If it is attaching to a dual controller array then choose the "Dual I/O" JBOD

HP StorageWorks MSA2000 Single I/O 3.5-inch 12 Drive Enclosure AJ749A

(use with single controller array heads. Ships with two .6m SAS to SAS cables suitable for connecting to the original MSA2000 controller. When connecting to the MSA2000fc G3 controller, the user must purchase the SAS to miniSAS cable such as the .5m 419569-B2)

HP StorageWorks MSA2000 Drive Enclosure I/O Module AJ751A

(Use to upgrade the Single I/O model to dual I/O. No cable included)

HP StorageWorks MSA2000 Dual I/O 3.5-inch 12 Drive Enclosure AJ750A

(use with dual controller array heads. Ships with two .6m SAS to SAS cables suitable for connecting to the original MSA2000 controller. When connecting to the MSA2000fc G3 controller, the user must purchase the SAS to miniSAS cable such as the .5m 419569-B2)

HP StorageWorks 70 Modular Smart Array (MSA70) SFF 2.5-inch drive Single I/O JBOD 418800-B21

Single I/O, single domain. 25 Small Form Factor (SFF) drive bays

(use only with MSA2324fc array head. Includes one miniSAS to miniSAS cable)

HP StorageWorks Dual Domain I/O Module for MSA70 AG779A

Makes the standard MSA70 (above) into a dual I/O, dual domain JBOD

(Includes one miniSAS to miniSAS cable)

MSA70 NOTE: Only Dual Port (DP) drives will work in the Dual Domain environment. Dual Domain environment requires the HP StorageWorks Dual Domain I/O Module Option (# AG779A).

For more information on the MSA70, go to the MSA70 Home Page:

http://h18006.www1.hp.com/storage/disk_storage/msa_diskarrays/drive_enclosures/msa70/index.html

Step 2c - SAS Cable Options



Configuration Information

miniSAS to miniSAS Cables:

Connecting MSA2300fc controller to MSA70 JBOD if a longer cable is desired.

HP Ext miniSAS to miniSAS 1m Cable 407337-B21

HP Ext miniSAS to miniSAS 2m Cable 407339-B21

SAS to miniSAS Cables:

Connecting MSA2300fc controller to MSA2000 3.5-inch Disk Enclosure

HP SAS to miniSAS .5m Cable 419569-B21

HP SAS to miniSAS 1m Cable 419570-B21

HP SAS to miniSAS 2m Cable 419571-B21

SAS Cables (SAS to SAS)

Older MSA2000fc controller to MSA2000 3.5-inch Disk Enclosure or cascading two MSA2000 3.5-inch Disk Enclosures if included .6m cables is not of sufficient length

HP Ext SAS to SAS 1m Cable 389665-B21

HP Ext SAS to SAS 2m Cable 389668-B21

Step 3 - Other MSA2300fc Options

Description	Quantity	Part Number
1 st generation HP StorageWorks 2000fc Modular Smart Array Controller (older version)	1 or 2	AJ744A
(ONLY for those desiring to configure an older MSA2012fc by using the MSA2012 chassis and installing either one or two of this model controller. The resulting array head will have the attributes of the first generation MSA2012fc with no support for SFF drives, no HP-UX, limited total drive count, limited snaps, etc.)		

Choose optional Power Cord for Non-U.S. Configurations

NOTE: Shipped standard with all units.

2 ea. Power Cord, 110/220 VAC, US/Canada/Mexico 227099-001		
Power Cord, 220/240 VAC, (US/Canada/Mexico)	2	227099-001
Power Cord, (Australia/China/New Zealand)	2	227098-001
Power Cord, (Central Europe)	2	157215-001
Power Cord, (United Kingdom/Hong Kong)	2	157216-001
Power Cord, (Switzerland)	2	157219-001
Power Cord, (Italy)	2	157217-001
Power Cord, (Denmark)	2	157218-001
Power Cord, (Japan)	2	139867-001
Power Cord, (South East Asia/India)	2	157220-001

Management Cable

HP MSA2 DB9 Controller Management cable (1 included)	AP761A
--	--------

Step 4 - Choose Supported Options For Fibre Channel Infrastructure

Fibre Channel	Model	Description	Part Number
Host Bus Adapters - X86 servers	FC2242SR	4Gb PCI-E Dual Channel HBA for Windows and Linux	A8003A
	FC2142SR	4Gb PCI-E for Windows and Linux	A8002A
	FC2243	4Gb PCI-X Dual Channel for Windows and Linux	AD168A



Configuration Information

FC2143	4Gb PCI-X 2.0 for Windows and Linux	AD167A
FC1242SR	4Gb PCI-E Dual Channel HBA for Windows and Linux	AE312A
FC1142SR	4Gb PCI Express HBA for Windows and Linux	AE311A
FC1243	4Gb PCI-X 2.0 Dual Channel for Windows and Linux	AE369A
FC1143	4Gb PCI-X 2.0 for Windows and Linux	AB429A
Bladeserver HBA	Lpe1105-HP 4Gb FC HBA for HP c-Class BladeSystem	403621-B21
Bladeserver HBA	QMH2462 4Gb FC HBA for HP c-Class BladeSystem Windows and Linux	403619-B21
Bladeserver HBA	QLogic QMH4062 1GbE iSCSI Adapter for HP BladeSystem c-Class, Windows and Linux	488074-B21
81E	StorageWorks 8Gb, PCIe to Fibre Channel Host Bus Adapter for Windows, Windows Server, and Linux	AJ762A
82E	StorageWorks 8Gb, PCIe to Fibre Channel Host Bus Adapter for Windows, Windows Server, and Linux	AJ763A
81Q	StorageWorks 8Gb, PCIe to Fibre Channel Host Bus Adapter for Windows, Windows Server, and Linux	AK344A
82Q	StorageWorks 8Gb, Dual Channel PCIe to Fibre Channel Host Bus Adapter for Windows, Windows Server, and Linux	AJ764A

Fibre Channel Host Bus Adapters - Integrity, PA-Risc servers

Integrity and HP9000 HP-UX v3 and v2	HP PCI-X 2.0 1Port 4Gb	AB378B
Integrity and HP9000 HP-UX v3, and v2	HP PCI-X 2.0 2Port 4Gb Fibre Channel HBA	AB379B
Integrity HP-UX v3 and v2	HP PCIe 2Port 4Gb Fibre Channel HBA	AD300A
Integrity server blades BL860c and BL870c HP-UX v3 and v2	HP BLc QLogic QMH2462 FC HBA Opt Kit	403619-B21
Integrity HP-UX v3 and v2	HP PCIe 1Port 4Gb Fibre Channel HBA	AD299A
Integrity HP-UX v3 and v2	HP PCIe 2-Port 4Gb Fibre Channel HBA	AD335A
Integrity server blades BL860c and BL870c HP-UX v3	HP BLc Emulex LPe1105 FC HBA Opt Kit	403621-B21
Integrity HP-UX v3	HP PCIe 1p 4Gb FC and 1p 1000BT Adapter	AD221A
Integrity HP-UX v3	HP PCIe 2p 4Gb FC and 2p 1000BT Adapter	AD222A
Integrity HP-UX v3	HP PCIe 2p 4Gb FC and 2p 1000BSX Adapter	AD393A
Integrity and HP9000 HP-UX v3 and v2	PCI-X 2Gb Fibre Channel/1000Base-SX HBA	A9782A



Configuration Information

Integrity and HP9000 HP-UX v3 and v2	HP PCI-x 1p 4Gb FC and 1p 1000BT Adapter	AD193A
Integrity and HP9000 HP-UX v3 and v2	HP PCI-x 2p 4Gb FC and 2p 1000BT Adapter	AD194A

Fibre Channel Switches

Brocade 4/12 SAN Switch for HP c-Class Blade System, Base	AE370A
Brocade 4/24 SAN Switch for HP c-Class Blade System, Full Fabric	AE372A
Brocade 4/24 SAN Switch for HP c-Class Blade System, Power Pack	AE371A
HP StorageWorks 4/8 Base SAN Switch	A7984A
HP StorageWorks 4/16 SAN Switch	A7985A
HP StorageWorks 4/16 SAN Switch Power Pack	A7987A
HP StorageWorks 4/8 SAN Switch	A8000A
HP StorageWorks 4/32B Base SAN Switch	AG756A
HP StorageWorks 4/32B Full SAN Switch	AG757A
HP StorageWorks 4/32B Power Pack SAN Switch	AG758A
HP StorageWorks 8/8 Base SAN Switch	AM866A
HP StorageWorks 8/8 SAN Switch	AM867A
HP StorageWorks 8/24 Base SAN Switch	AM868A
HP StorageWorks 8/40 Base SAN Switch	AM869A
HP StorageWorks 8/40 Power Pack+ SAN Switch	AM870A
HP StorageWorks 8/80 Power Pack+ SAN Switch	AM872A
HP StorageWorks 8/80 Base SAN Switch	AM871A
HP StorageWorks 4/256 SAN Director	A7988A
HP StorageWorks 4/256 Power Pack SAN Director	A7989A
HP StorageWorks DC SAN Backbone Director	AK857A
Brocade 8/12c SAN Switch for HP BladeSystem c-Class	AJ820A
Brocade 8/24c SAN Switch for HP BladeSystem c-Class	AJ821A
Brocade 8/24c SAN Switch for HP BladeSystem c-Class Power Pack+ 8 Gb Simple SAN Connection	AJ822A
HP StorageWorks 8/20q Fibre Channel Switch (8 switch ports active)	AQ233A
HP StorageWorks 8Gb Simple SAN Connection Kit (8 switch ports active)	AK241A
HP StorageWorks 8/20q Fibre Channel Switch (16 switch ports active)	AK242A
Cisco MDS 9124 8-ports Active Fabric Switch	AG646A
Cisco MDS 9124 16-ports Active Fabric Switch	AG647A
Cisco MDS 9124 24-ports Active Fabric Switch	AG648A
Cisco MDS 9124e 12-port Fabric Switch for HP c-Class BladeSystem	AG641A
Cisco MDS 9124e 24-port Fabric Switch for HP c-Class BladeSystem	AG642A
Cisco MDS 9134 24-ports Active Fabric Switch	AG874A
Cisco MDS 9134 32-ports Active Fabric Switch	AG875A
Cisco MDS 9134 26-ports Active w/kit for 48 port solution	AJ732A
Cisco MDS 9134 34-ports Active w/kit for 64 port solution	AJ733A
MDS 9222i Multiservice Modular Switch w/0 SFPs	AG851A



Configuration Information

Cisco MDS 9216i w/o Ethernet SFP switch	AE390A
Cisco MDS 9216i	AE390A
MDS 9506 Director with Supervisor 2	AE388A
MDS 9509 Director with Supervisor 2	AE389A
MDS 9513 Director with Supervisor 2	AE376A
MDS 9513 Director with Fabric 2 Module	AJ905A

Fibre Channel Cables	2 m LC-LC Multi-Mode Fibre Channel Cable	221692-B21
	5 m LC-LC Multi-Mode Fibre Channel Cable	221692-B22
	15 m LC-LC Multi-Mode Fibre Channel Cable	221692-B23
	30 m LC-LC Multi-Mode Fibre Channel Cable	221692-B26
	50 m LC-LC Multi-Mode Fibre Channel Cable	221692-B27
	2 m LC-SC Multi-Mode Fibre Channel Cable	221691-B21
	5 m LC-SC Multi-Mode Fibre Channel Cable	221691-B22
	15 m LC-SC Multi-Mode Fibre Channel Cable	221691-B23
	30 m LC-SC Multi-Mode Fibre Channel Cable	221691-B26
	50 m LC-SC Multi-Mode Fibre Channel Cable	221691-B27

Step 5 - Choose Rack Options

Please refer to the HP Infrastructure products page for more information on HP racks and rack options:

<http://h18004.www1.hp.com/products/servers/platforms/rackandpower.html>



Technical Specifications

MSA2000fc G2	POWER REQUIREMENTS	
	Input Power Requirements (typ)	110 VAC 3.6A/394W; 220VAC 1.9/385W
	Max Input Power	100-240 VAC, 50/60 Hz., 4.5-1.9A; 48-60 VDC 10.4A/8.3A
	Heat Dissipation	1622 BTU/hr
	TEMPERATURE AND HUMIDITY RANGES	
	Operating Temperature	41°F to 104°F (5°C to 40°C)
	Shipping Temperature	-40°F to 158°F (-40°C to 70°C)
	Operating Humidity	10% to 90% RH @ 104°F (40°C) non-condensing
	Non-Operating Humidity	Up to 93% RH @ 104°F (40°C)
	DECLARED ACOUSTIC NOISE LEVELS	
	Sound Power	< 6.5 Bels
	Sound Pressure	< 57 dBA
	SHOCK AND VIBRATION	
	Shock, Operational	5G's for 11 milliseconds, half sine
	Shock, Non-Operational	15G 11 ms half sine
	Vibration, Operational	5-500Hz, 0.21Grms flat spectrum 0.000089g2/HZ Random Vibration
	Vibration, Non-Operational	5-500-5Hz, 0.5 G peak to peak, sinusoidal
	PHYSICAL	
	Height	3.436 in/ 8.727 cm
	Depth (excluding cables) (back of ear to back of controller handle)	MSA2024: 20.28 in / 51.510 cm MSA2012: 21.8 in. / 55.372 cm
	Width (body only)	17.55 in / 44.58 cm (w/ ears 19 in / 48.26 cm)
	Chassis Weight (no controllers)	MSA2012 chassis: 44 lbs. MSA2024 chassis: 43 lbs

Modular SAN Array 2300fc G2 Controller	User Interface	- Status and activity provided via management interfaces Status Indicators on front of Controller
	RAID Support	0, 1, 3, 5, 6, 10, 50
	Cache Memory	1GB Read/Write. ECC protection with backup to Flash memory (indefinite backup)
	Cache Backup	ECC protection with back up to flash memory (indefinite backup)
	Upgradeable Firmware	yes
	Disk Drive and Enclosure Protocol Support	3 Gb SAS - Serial Attached SCSI / 3 Gb SATA II
	Expansion Port	MSA2000fc SAS (SFF8470) 4x lane 3 Gb SAS MSA2300fc SAS (SFF8088) 4x lane 3 Gb SAS



Technical Specifications

Regulatory	Safety	UL 60950-1 (USA)
		CAN/CSA-C22.2 No.60950-1-03 (Canada)
		EN 60950-1 (European Union)
		IEC 60950-1 (International)
	Electromagnetic Compatibility	VCCI:2008-04 Class A
		ICES-003 Issue 4 Class A (Canada)
		EN55022 : (European Union Class A); CISPR 22 (International)
		EN61000-3-2 : (Harmonics)
		EN61000-3-3 : (Flicker)
		EN 55024 (European Union, Immunity);CISPR 24 (International Immunity)
		CNS 13438 Taiwan
		KN22 Class A (Emissions); KN24 (Immunity)
	RoHS and WEEE	RoHS-5 Compliance, China RoHS, WEEE
	Country Approvals	Australia/New Zealand, Canada, China (PRC), European Union, Germany (GS Mark), Japan, South Korea, Taiwan, United States

© Copyright 2010 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation. Unix is a registered trademark of The Open Group.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

