



Overview

Performance and manageability to scale your business. The HP ProLiant ML330 G6 is a new dual processor tower platform which built on the latest Intel Xeon processors with QPI technology to create a unique system architecture. This unique architecture enables you to scale your business as needed and allows you to improve the efficiency of how you spend your IT dollars. ML330 G6 not only delivers excellent performance with the latest technology but it also incorporates the industry's most powerful embedded management technology with the HP Integrated Lights-Out 2 (iLO 2) for ProLiant controller, allowing you to manage servers anytime and anywhere.

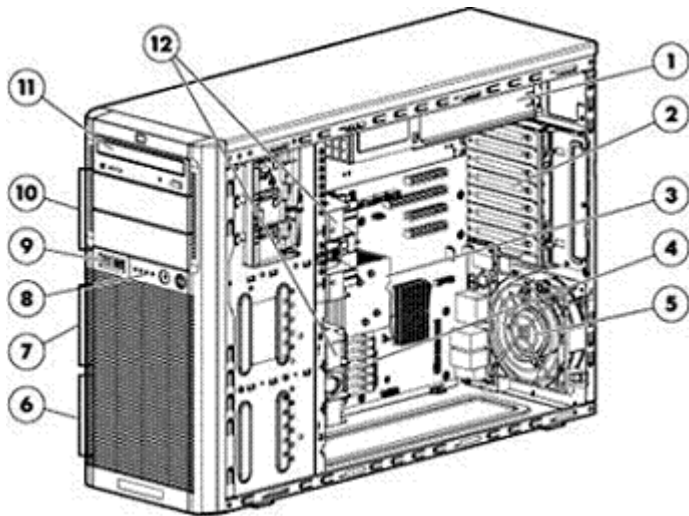

Front View:

1. Power supply
2. Expansion slots
3. 1st Processor socket
4. Nine DIMM slots (for 1st processor)
5. Rear System Fan
6. Hard drive bays 5-8
7. Hard drive bays 1-4
8. LED indicators and power button
9. USB connectors (2)
10. Removable Media Bays
11. Optical drive bays
12. Front System Fans

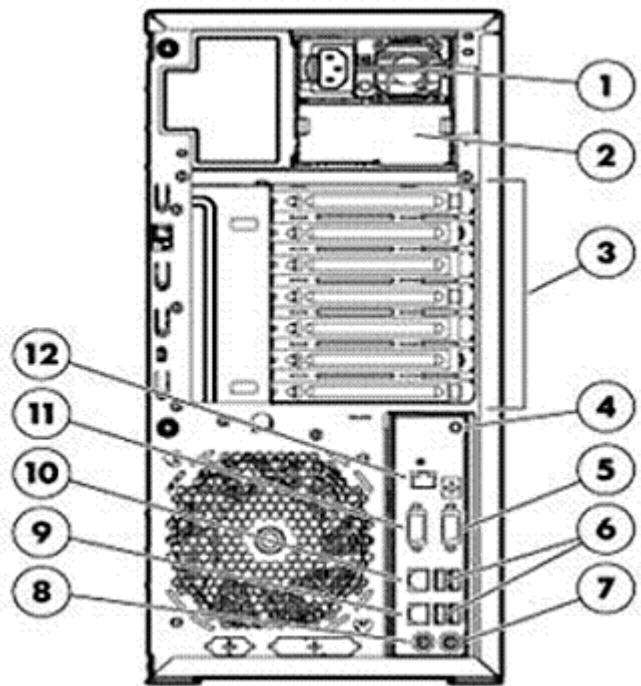

Rear View:

1. Power supply 1
2. Power supply (blank) (for Redundant Optional)
3. Expansion slots
4. UID button/LED
5. Video ports
6. Four USB ports
7. PS/2 Keyboard port
8. PS/2 Mouse port
9. Network port 1(shared iLO management port)
10. Network port 2
11. Serial port
12. Dedicated iLO management port (optional)

What's New

- Supports the new Intel Xeon processors X5600/E5600 family with up to 2.66GHz at 6 cores turbo mode and latest E5500 series.



Standard Features

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

Processor
One of the following
depending on Model

- Six-Core Processors**
Intel® Xeon® Processor X5650 (2.66 GHz, 12MB L3 Cache, 95W,DDR3-1333, HT, Turbo 1/1/2/2/3/3)
Quad-Core Processors
Intel® Xeon® Processor E5640 (2.66 GHz, 12MB L3 Cache, 80W, DDR3-1066, HT, Turbo NA/1/1/2/2)
Intel® Xeon® Processor E5630 (2.53 GHz, 12MB L3 Cache, 80W, DDR3-1066, HT, Turbo NA/1/1/2/2)
Intel® Xeon® Processor E5620 (2.40 GHz, 12MB L3 Cache, 80W, DDR3-1066, HT, Turbo NA/1/1/2/2)
Intel® Xeon® Processor E5540 (2.53 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2)
Intel® Xeon® Processor E5530 (2.40 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2)
Intel® Xeon® Processor E5520 (2.26 GHz, 8MB L3 Cache, 80W, DDR3-1066, HT, Turbo 1/1/2/2)
Intel® Xeon® Processor E5507 (2.26 GHz, 4MB L3 Cache, 80W, DDR3-800)
Intel® Xeon® Processor E5506 (2.13 GHz, 4MB L3 Cache, 80W, DDR3-800)
Intel® Xeon® Processor E5504 (2.00 GHz, 4MB L3 Cache, 80W, DDR3-800)
Intel® Xeon® Processor W3540 (2.93 GHz, 8MB L3 Cache, 130W, DDR3-1066, HT, Turbo 1/1/1/2)
Intel® Xeon® Processor W3520 (2.66 GHz, 8MB L3 Cache, 130W, DDR3-1066, HT, Turbo 1/1/1/2)
Dual-Core Processors
Intel® Xeon® Processor E5503 (2.00 GHz, 4MB L3 Cache, 80W, DDR3-800)
Intel® Xeon® Processor E5502 (1.86 GHz, 4MB L3 Cache, 80W, DDR3-800)
Intel® Xeon® Processor W3505 (2.53 GHz, 4MB L3 Cache, 130W, DDR3-1066)
Intel® Xeon® Processor W3503 (2.40 GHz, 4MB L3 Cache, 130W, DDR3-1066)
NOTE: HT indicates that the processor model supports Intel® Hyper-Threading Technology.
NOTE: Turbo indicates the maximum potential frequency increment when using Intel® Turbo Boost Technology, with 4, 3, 2, and 1 cores active.
NOTE: DDR3 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.
NOTE: For the Intel 5500 and 5600 Series, the letter preceding the model number indicates the performance/wattage of the processor. "X" denotes High Performance/Wattage; "E" denotes Enterprise Performance/Wattage (Mainstream); and "L" denotes Lower Wattage.

Cache Memory
One of the following
depending on Model

- 12MB (1x 12MB) level 3 cache
NOTE: For processors X5600 and E5600.
8MB (1 x 8MB) Level 3 cache
NOTE: For processors E5540/E5530/E5520/W3540/W3520.
4MB (1 x 4MB) Level 3 cache
NOTE: For processors E5506/E5504/E5502/W3505/W3503.



Standard Features

| | | | |
|---|---|---|--|
| Chipset | Intel® 5500 Chipset NOTE: For more information regarding Intel® chipsets, please see the following URL: http://www.intel.com/products/server/chipsets/ . | | |
| Upgradeability | Upgradeable to 2 processors (4 or 8 or 12 cores) | | |
| Memory Protection | Mirroring Lock-step mode Advanced ECC Online Spare (Requires X5600 or E5600 processor family) NOTE: Xeon W3500 processor family does not support any of above advanced features. | | |
| Memory | Type | DDR3 Registered (RDIMM) and Unbuffered (UDIMM) | |
| One of the following depending on model | Standard (Performance) | 6GB (3 x 2GB) PC3-10600R (DDR3-1333) Registered DIMMs | |
| | Standard (Base Models) | 4GB (2 x 2GB) PC3-10600R (DDR3-1333) Registered DIMMs | |
| | Standard (Entry Models) | 2GB (1 x 2GB) PC3-10600R (DDR3-1333) Registered DIMMs | |
| | Maximum (RDIMM) | 192GB (18 x 8GB) for Registered Memory configurations | |
| | Maximum (UDIMM) | 48GB (12x 2GB) for Unbuffered Memory configurations | |
| | NOTE: Depending on the memory configuration and processor model, the memory speed may run at 1333MHz, 1066MHz, or 800MHz. Please see the Online Memory Configuration Tool at: www.hp.com/go/ddr3memory-configurator . NOTE: If only one processor is installed, only half the DIMM slots are available | | |
| Network Controller | Embedded NC326i PCI Express Dual Port Gigabit Server Adapter | | |

Expansion Slots

NOTE: Four total expansion slots. One (1) PCI-Express x8 Gen1 (x1 speed); One (1) PCI-Express x16 Gen2 (x16 speed); Two (2) PCI-Express x8 Gen2 (x4 speed). Optional PCI-X Expander provides additional two (2) 64-bit/100-MHz PCI-X slots by using a single PCI Express slot (only on slot 5).

| Expansion Slot # | Technology | Bus Width** | Connector Width | Bus Number* | Form Factor | Notes |
|------------------|------------------|-------------|-----------------|-------------|------------------------------|-------|
| 6 | PCI Express Gen2 | x4 | x8 | 4 | Standard Height/ Half Length | |
| 5 | PCI Express Gen2 | x4 | x8 | 10 | Standard Height/ Half Length | |
| 4 | PCI Express Gen2 | x16 | x16 | 13 | Standard Height/Length | |
| 3 | PCI Express Gen1 | x1 | x8 | 7 | Standard Height/Length | |

Standard Features

* Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number
** Indicates the number of physical electrical lanes running to the connector.

| | | |
|--------------------|--|--|
| Storage Controller | Entry Models | Non hot plug model with HP Smart Array B110i SATA RAID Controller (RAID 0/1/1+0) |
| | Base Models | Hot plug SAS model integrated HP Smart Array P410/Zero memory SAS Controller (RAID 0/1/1+0) |
| | | Hot plug SATA model integrated HP Smart Array B110i SATA RAID controller hot plug advanced key |
| | Performance Models | Hot plug SATA model integrated HP Smart Array B110i SATA RAID controller hot plug advanced key |
| | Available upgrades: 256MB, 512MB with BBWC, 512MB with FBWC, 1G with FBWC, Battery kit upgrade (for the 256MB cache), and Smart Array Advanced Pack (SAAP) | |

| | | | |
|--------------------------|---|---|--|
| Internal Storage Devices | Diskette Drive | None | |
| | Optical Drive | HP Half-Height SATA DVD-ROM Optical Drive | |
| | Hard Drives | Hot Plug Model: None ship standard | |
| | One of the following depending on Model | HP 250GB 3G SATA 7.2K NHP 3.5" MDL HDD | |

| | | | |
|--------------------------|-------------------|------|---------|
| Maximum Internal Storage | Hot Plug LFF SATA | 16TB | 8 x 2TB |
| | Hot Plug LFF SAS | 16TB | 8 x 2TB |

| | | |
|------------|-------------------------|--|
| Interfaces | Serial | 1 |
| | Network RJ-45 | 3 (1 dedicated for HP Integrated Lights-Out 2 (iLO 2)) |
| | Keyboard | 1 |
| | Pointing Device (Mouse) | 1 |
| | Graphics | 1 |
| | SD Slot | 1 (internal) |
| | USB 2.0 Ports | 8 (2 front, 4 rear, 2 internal) |

NOTE: Please see the following URL for additional information regarding USB support:
<http://h18004.www1.hp.com/products/servers/platforms/usb-support.html>.



Standard Features

| | |
|------------------------------|--------------------------------|
| Industry Standard Compliance | ACPI V2.0 Compliant |
| | PCI-Express Gen2 |
| | PXE Support |
| | WOL Support |
| | PCI-X 1.0a Compliant |
| | Microsoft® Logo certifications |
| | USB 2.0 |

| | |
|--------------------|--|
| Server Power Cords | NOTE: If customers require a local power cord, they can check the power cord matrix for the appropriate county specific sku. Please see the following power cord matrix for details: http://www.hp.com/go/powercordmatrix |
|--------------------|--|

| | |
|----------------------------|--|
| Common Slot Power Supplies | <p>(1) 460W Non-Hot Plug, Non-redundant Power Supply</p> <p>It is highly recommended that you use the HP Power Advisor in defining the "Right-Size" power supply for your need. The HP Power Advisor is located at www.hp.com/go/hppoweradvisor</p> <p>HP has a new design for ProLiant power supplies. The new Common Slot (CS) Power Supply provides the customer with commonality in power supplies across multiple platforms to save on the cost of spares and allows HP to offer multiple power solutions to fit the customers' needs. Many HP ProLiant Servers come with or are compatible with high-efficiency HP CS Power Supplies. These power supplies are designed to provide high-efficiency power without degrading performance of the ProLiant server. HP CS Power Supplies options for this server have efficiency ratings up to 92%. There are three Right Size power options available, depending on the configuration of your server. To make sure you select the correct power supply to meet your configuration, we suggest that you use the HP Power Advisor to decide the "Right-Size" for your configuration. All HP Common Slot power sources are UL, CE Mark Compliant, Hot Plug and Redundant.</p> <p>HP's ProLiant CS Power supplies (750W) meet multiple Energy Efficiency Initiatives, including Climate Savers Computing Initiative GOLD, ECOS Consulting 80PLUS GOLD and they meet the standard specifications for Energy Star for Servers Power Supply requirements.</p> |
|----------------------------|--|

| | |
|-------------|---|
| System Fans | <p>3 fans ship standard, 4 fans total supported (optional (1) redundant fan)</p> <p>NOTE: Does not include power supply or processor heat sink fans. Processor heat sink fans packed in processor kit.</p> <p>NOTE: There are two fans packed in the Redundant Fan Kit, only 1 is required for system redundant function. The other one can be saved as a spare part.</p> |
|-------------|---|

Standard Features

Operating Systems and Virtualization Software Support for ProLiant Servers

Microsoft Windows Server
Microsoft Windows Server Hyper V
Red Hat Enterprise Linux (RHEL)
SUSE Linux Enterprise Server (SLES)
Oracle Enterprise Linux (OEL)
VMware
Citrix Essentials for XenServer

NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: <http://www.hp.com/go/ossupport> and our driver download page www.hp.com/support/ML330G6.

Graphics

Integrated ATI RN50, 64MB video standard

- 16 bit color: maximum resolution of 1600 x 1200
- 32 bit color: maximum resolution of 1280 x 1024

NOTE: Maximum resolution available via HP Integrated Lights-Out 2 (iLO 2) remote console is 1280 x 1024.

Form Factor

Tower (5U)

NOTE: Rack mounting available via HP Tower to Rack Conversion Tray, Universal Kit. Please see the options section in this QuickSpecs:

- Square or round hole racks 24"- 36" deep, including HP Rack System /E and HP Systems
- Telco racks with 3rd part option kit from Rack Solutions www.hp.com/go/rackandpower

HP Insight management software

HP Insight Foundation

Managing the growing number of servers can be complex and expensive for your organization. IT managers need to address changing business needs with tools that meet the challenges of managing today's complex Datacenters.

HP provides management solutions that are designed to simplify a server's installation, configuration and maintenance throughout the entire server lifecycle. This provides the customer with higher levels of operational efficiency and highly reliable systems: www.hp.com/go/foundation.

The foundation pack includes:

- HP SmartStart
- HP Management
- HP ProLiant Firmware Maintenance

SmartStart version supported (minimum): SmartStart 8.25
<http://www.hp.com/servers/smartstart>

NOTE: In an effort to support reducing our environmental impact, the HP ProLiant Essentials Foundation Pack media will be available as a selectable option for this server at time of order of a Factory Integrated Model. This will allow customers to order the number of media kits that best meet their needs



Standard Features

| | |
|--------------------------------|---|
| HP Integrated Lights-Out (iLO) | and eliminate receiving unnecessary duplicate media. HP Integrated Lights-Out (iLO) simplifies server setup, health monitoring, power and thermal control, and lights-out remote administration of ProLiant ML, DL, and BL servers. HP iLO functions without additional software and can be accessed from any location via a web browser. HP iLO works hand-in-hand with HP Systems Insight Manager, Insight Control suites, and Insight Dynamics for ProLiant, helping customers unleash the value of the ProLiant platform and deliver the highest possible quality of IT service. For more information, visit: www.hp.com/go/iLO |
|--------------------------------|---|

| | |
|---------------------------|---|
| Intelligent Manageability | HP Systems Insight Manager SmartStart Redundant ROM System Firmware Update ROMPaq ProLiant RBSU (ROM-Based Setup Utility) Automatic Server Recovery-2 (ASR-2) Dynamic Sector Repairing (with Smart Array Controller) Drive Parameter Tracking (with Smart Array Controller) Pre-Failure Warranty (covers processors, memory, and SAS hard drives) Dynamic power capping (with 750W PSU) |
|---------------------------|---|

| | |
|----------|---|
| Security | Power-on password Setup password Serial interface control Power switch security Front bezel/side access panel Lock Padlock and Kensington lock available Keyboard/Mouse/USB port lock |
|----------|---|

| | |
|----------|--|
| Warranty | <p>This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.</p> <p>NOTE: Server Warranty includes 3-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html</p> |
|----------|--|



Optional Features

HP Insight management software

HP Insight Control

HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console.

Two versions of Insight Control are available, to serve environments requiring either a Linux-based or a Windows-based central management server: HP Insight Control for Linux, and HP Insight Control. See

www.hp.com/go/insightcontrol

HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: <http://www.hp.com/services/insight>.

HP Insight Dynamics for ProLiant

HP Insight Dynamics for ProLiant, a product option, is advanced infrastructure management software that enables IT staff to instantly adjust their environments to meet dynamic business demands by provisioning, optimizing and protecting complex infrastructure in minutes. It's a powerful toolkit, integrated-by-design, that accelerates complex technology projects and simplifies daily operations, transforming data center economics. With Insight Dynamics IT professionals can plan capacity and power continuously, balance workloads across physical and virtual resources, and ensure cost-effective high availability. It also enables IT organizations to provision infrastructure consistently and automatically from pools of shared resources using a self-service portal. Resources provisioned can range from a single virtual machine to complex multi-tier environments and their associated physical and virtual resource requirements. In addition to the previous functional benefits, it also provides a cost-effective disaster recovery for physical and virtual environments that works with HP StorageWorks Continuous Access software for both the Enterprise Virtual Array and the XP storage array allowing application environments to be reactivated in minutes with the touch of a button to a remote location.

NOTE: For more information, visit:

<http://www.hp.com/go/insightdynamics>



Optional Features

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.

HP Enterprise Configurator

The HP eConfigure-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance. <http://www.hp.com/products/configurator>



Service and Support

Service and Support

HP Care Pack Services: Packaged server and storage services for increased uptime, productivity and ROI

When you buy HP server and storage products and solutions, it's also a good time to think about what levels of support you may need. Our portfolio of service options reduce deployment and management worries while helping you get the most out of your server and storage investments. We take a holistic approach to your environment, bridging servers, blades, storage, software and network infrastructures with our packaged HP Care Pack Services for servers and storage.

Protect your business beyond warranty

When it comes to robustness and reliability, standard computing equipment warranties have matured along with technology. Good news that can also create problems stemming from depending on standard warranties designed to only protect against product defects and some downtime causes. Using a standard approach to warranty uplifts, such as HP Care Pack Services, helps reduce downtime risks and provides operational consistency for mission-critical and standard business computing.

HP Care Pack Services: Upgrading or extending standard server and storage warranties cost effectively

HP Care Pack Services offer a standard reactive hardware and software support services suite sold separately, or combined with our Support Plus and Support Plus 24 services. The portfolio also provides a combination of integrated proactive and reactive services, such as Proactive 24 Service and Critical Service. In addition with HP Proactive Select, you can acquire the specific proactive constancy and technical services. HP Proactive Select menu offers a broad set of service options that you can mix and match depending on your specific requirements. Proactive service options include offers for server, storage, network, SAN device, software, environment and education services.

HP server and storage lifecycle support services offers a full spectrum of customer care-from technology support to complex migrations to complete managed services. HP Factory Express provides customization, integration and deployment services for turnkey solutions. HP Education Services offer flexible, comprehensive training on to help your IT staff get the most out of your server and storage investments. HP Financial solutions extend innovative financing and cost-effective asset management programs-from purchase to equipment retirement.

Learn more: www.hp.com/services/servers and www.hp.com/services/storage

NOTE: Care Pack Services availability may vary by product and country.

HP Care Pack Services are sold by HP and HP Authorized Service Partners:

- Services for customers purchasing from HP or an enterprise reseller are quoted using HP order configuration tools.
- Customers purchasing from a commercial reseller can find HP Care Pack Services at <http://www.hp.com/go/lookuptool>



Service and Support

Recommended HP Care Pack Services for optimal satisfaction with your HP product

Recommended Services **3-Year HP Hardware Support Onsite Call-to-Repair (CTR) Service, 6- or 24-hour**
Provides your IT manager with a team of support specialists who will quickly begin troubleshooting the system to help return the hardware to operating condition within 6 or 24 hours of the initial service request to the HP Global Solution Center.

HP is committed to repairing your hardware within a maximum of six or twenty four hours. The benefits include:

- Improved system uptime
- Predictable repair times
- More effective IT resource planning
- Consistent level of hardware support across your multi-technology systems

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6636ENN>

3-Year HP Hardware Support Onsite Service, 4-hour response, 24x7

Provides you with rapid remote support and if required an HP authorized representative who will arrive on site any time and day of the year to begin hardware maintenance service within 4 hours of the service request being logged.

This service provides a trained HP service specialist to perform an installation that meets HP quality standards, for:

- Help improve or maintain system uptime
- Convenient onsite support
- Committed response time

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EEE>

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

- Expedited installation, with all service prerequisites met before the installation is performed
- Installation in accordance with manufacturer's specifications, enhancing the supportability of your HP-installed hardware and software
- Service delivery at a mutually scheduled time
- Allows your IT resources to stay focused on their core tasks and priorities
- Availability of an HP service specialist to answer questions during the onsite delivery of this service

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>



Service and Support

Optional HP Care Pack Services that will enhance your HP product experience

Optional Services

3-Year HP Support Plus 24

As an alternative to our recommended support level, for customers who need access to responsive 24x7 hardware and software support plus software updates on HP and selected third party products:

For a higher return on your server and storage technology, our 3-year combined reactive support service delivers integrated onsite hardware/software support services available 24x7x365, including access to HP technical resources, 4-hour response onsite hardware support and software updates.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6638EEE>

3-Year HP Proactive 24

As an alternative to our recommended support level, for customers who want enhanced operational effectiveness and proactive problem identification:

Provides improved stability, availability and operational effectiveness with an integrated hardware and software support service that combines industry-leading reactive technical assistance with proactive account services, giving your IT manage support from a team of service specialists.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA0-1614ENUC>

HP Proactive Select Service

Customer needs on demand access to consulting, technical proactive services and education courses

Provides a flexible way to purchase HP best-in-class consultancy and technical services. You can buy Proactive Select Service Credits when you purchase your hardware and then use the credits over the next 12 months.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA2-3842ENN>

eSupport

HP eSupport is a portfolio of technology-based services that assist you with managing your business environment - from the desktop to the data center.

Support Portal

The HP support portal provides one-stop access to the information, tools and services you need to manage the daily operations of your IT environment.

Features include:

- Access to self-solve tools (including search technical knowledge base)
- Efficient logging and tracking of support cases
- Collaboration with other business and IT professionals
- Download of patches and drivers
- Access to diagnostic tools
- Proactive notification of relevant information

Access to certain features of the support portal requires an HP service agreement. To access the support portal, visit: <http://www.hp.com/support>

HP Insight Remote Support software delivers secure remote support for your HP Servers and Storage, 24



Service and Support

X 7, so you can spend less time solving problems and more time focused on your business. You can have your systems remotely monitored for hardware failure using secure technology that's been proven at thousands of companies around the world. In many cases, you can avoid problems before they occur.

Customer Technical Training

In today's cost-conscious business environment, IT professionals, developers, consultants and users face an interesting challenge: how to keep up with the latest technologies and expand important skills while delivering profitable results on current projects. To help address this challenge, HP offers innovative training solutions that help keep you up-to-date on virtualization, server, storage, Insight Control, Citrix, Microsoft® and open source/Linux-related topics-while spending less time away from business-critical activities.

HP Services Awards

HP Technology Services continues to be recognized for service and support excellence by customers, partners, industry organizations and publications around the world. Recent honors and award reflect our services team's dedications, technical expertise, professionalism and uncompromising commitment to customer satisfaction.

Additional Services Information

To learn more on HP ProLiant servers, HP BladeSystem servers and HP StorageWorks storage products, please contact your HP sales representative or HP Authorized Channel Partner. Or visit: www.hp.com/services/proliant or www.hp.com/services/bladeSystem or <http://www.hp.com/hps/storage>



Pre-configured Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

NOTE: Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

NOTE: HP does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

NOTE: If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

NOTE: Not all models are available in all regions. Check with your local country HP offices for availability.

| | | |
|---|---------------------------|---|
| HP ML330 G6 Entry Model Quad-Core Models HP ML330T06 E5504 LFF Non Hot Plug 504055-xx1 | Processor(s) | (1) Intel® Xeon® Processor E5504 (2.00 GHz, 4MB L3 Cache, 80W, DDR3-800) |
| | Cache Memory | 4MB (1 x 4MB) Level 3 cache |
| | Memory | 2 GB (1 x 2 GB) PC3-10600R (DDR3-1333) Registered DIMMs NOTE: 18 DIMM slots. |
| | Network Controller | Embedded NC326i PCI Express Dual Port Gigabit Server Adapter |
| | Storage Controller | Embedded HP Smart Array B110i SATA RAID Controller (RAID 0/1/0+1) |
| | Hard Drive | HP 250GB 3G SATA 7.2K NHP 3.5" MDL HDD |
| | Internal Storage | 8TB LFF SAS 8TB LFF SATA |
| | Optical Drive | HP Half-Height SATA DVD-ROM Optical Drive |
| | Power Supply | 460 Watt power supply (NHP, Non Redundant) |
| | Fans | 3 fans ship standard |
| | Form Factor | Tower (5U) |
| | Warranty | Server Warranty includes 3-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. |

| | | |
|---|---------------------------|---|
| HP ML330 G6 Base Models Quad-Core Models HP ML330T06 E5506 LFF Hot Plug 504056-xx1 | Processor(s) | (1) Intel® Xeon® Processor E5506 (2.13 GHz, 4MB L3 Cache, 80W, DDR3-800) |
| | Cache Memory | 4MB (1 x 4MB) Level 3 cache |
| | Memory | 4 GB (2 x 2 GB) PC3-10600R (DDR3-1333) Registered DIMMs NOTE: 18 DIMM slots. |
| | Network Controller | Embedded NC326i PCI Express Dual Port Gigabit Server Adapter |
| | Storage Controller | HP Smart Array P410/Zero memory Controller (RAID 0/1/0+1) |
| | Hard Drive | None ship standard |
| | Internal Storage | 8TB LFF SAS 8TB LFF SATA |
| | Optical Drive | HP Half-Height SATA DVD-ROM Optical Drive |
| | Power Supply | 460 Watt power supply (NHP, Non Redundant) |
| | Fans | 3 fans ship standard |
| | Form Factor | Tower (5U) |
| | Warranty | Server Warranty includes 3-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. |



Pre-configured Models

| | | |
|---|---------------------------|---|
| HP ML330 G6 Base Models Quad-Core Models HP ML330T06 E5507 LFF Hot Plug 600910-xx1 | Processor(s) | (1) Intel® Xeon® Processor E5507 (2.26 GHz, 4MB L3 Cache, 80W, DDR3-800) |
| | Cache Memory | 4MB (1 x 4MB) Level 3 cache |
| | Memory | 4 GB (2 x 2 GB) PC3-10600R (DDR3-1333) Registered DIMMs NOTE: 18 DIMM slots. |
| | Network Controller | Embedded NC326i PCI Express Dual Port Gigabit Server Adapter |
| | Storage Controller | Embedded HP Smart Array B110i SATA RAID Controller Hot plug advanced key (RAID 0/1/0+1) |
| | Hard Drive | None ship standard |
| | Internal Storage | 8TB LFF SAS 8TB LFF SATA |
| | Optical Drive | HP Half-Height SATA DVD-ROM Optical Drive |
| | Power Supply | 460 Watt power supply (NHP, Non Redundant) |
| | Fans | 3 fans ship standard |
| | Form Factor | Tower (5U) |
| | Warranty | Server Warranty includes 3-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. |

| | | |
|--|---------------------------|---|
| HP ML330 G6 Performance Models Quad-Core Models HP ML330T06 E5620 LFF Hot Plug 600911-xx1 | Processor(s) | (1) Intel® Xeon® Processor E5620 (2.40 GHz, 12MB L3 Cache, 80W, DDR3-1066) |
| | Cache Memory | 12MB (1 x 12MB) Level 3 cache |
| | Memory | 6 GB (3 x 2 GB) PC3-10600R (DDR3-1333) Registered DIMMs NOTE: 18 DIMM slots. |
| | Network Controller | Embedded NC326i PCI Express Dual Port Gigabit Server Adapter |
| | Storage Controller | Embedded HP Smart Array B110i SATA RAID Controller Hot plug advanced key (RAID 0/1/0+1) |
| | Hard Drive | None ship standard |
| | Internal Storage | 8TB LFF SAS 8TB LFF SATA |
| | Optical Drive | HP Half-Height SATA DVD-ROM Optical Drive |
| | Power Supply | 460 Watt power supply (NHP, Non Redundant) |
| | Fans | 3 fans ship standard |
| | Form Factor | Tower (5U) |
| | Warranty | Server Warranty includes 3-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. |



Pre-configured Models

| Country Code Key | Tower Code Key | Rack Code Key |
|------------------|----------------|---------------|
| xx=00 | U.S. | U.S. |
| xx=01 | Australia | N/A |
| xx=03 | UK | N/A |
| xx=04 | Germany | N/A |
| xx=05 | France | N/A |
| xx=20 | Brazil | N/A |
| xx=29 | Japan | Japan |
| xx=37 | APD | APD |
| xx=42 | Europe | Europe |
| xx=AA | PRC | PRC |



Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

NOTE: Configure-to-order (CTO) servers must start with a CTO Chassis.

NOTE: FIO indicates that this option is only available as a factory installable option.

Step 1: Base Configuration (choose one of the following configurable models)

| | | |
|-----------|--|------------|
| HP Models | HP ML330G6 CTO Chassis | 504271-B21 |
| | Includes: | |
| | Embedded NC326i PCI Express Dual Port Gigabit Server Adapter | |
| | Integrated Smart Array B110i SATA RAID Controller | |
| | One PCI-Express x8 Gen1 (x1 speed); One PCI-Express x16 Gen2 (x16 speed); Two PCI-Express x8 Gen2 (x4 speed) | |
| | Eight USB ports | |
| | Tower Form Factor | |
| | Keyboard | |
| | 2-button Mouse | |

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

| | | |
|---------------|--|------------|
| HP Processors | Six-Core Processors | |
| | HP ML330 G6 Intel® Xeon® X5650 (2.66GHz/6-core/95W/12MB) FIO Processor Kit | 601054-L21 |
| | Quad-Core Processors | |
| | HP ML330 G6 Intel® Xeon® E5640 (2.66GHz/4-core/80W/12MB) FIO Processor Kit | 607120-L21 |
| | HP ML330 G6 Intel® Xeon® E5630 (2.53GHz/4-core/80W/12MB) FIO Processor Kit | 601053-L21 |
| | HP ML330 G6 Intel® Xeon® E5620 (2.40GHz/4-core/80W/12MB) FIO Processor Kit | 601052-L21 |
| | HP ML330 G6 Intel® Xeon® E5540 (2.53GHz/4-core/8MB/80W) FIO Processor Kit | 535585-L21 |
| | HP ML330 G6 Intel® Xeon® E5530 (2.40GHz/4-core/8MB/80W) FIO Processor Kit | 535584-L21 |
| | HP ML330 G6 Intel® Xeon® E5520 (2.26GHz/4-core/8MB/80W) FIO Processor Kit | 535583-L21 |
| | HP ML330 G6 Intel® Xeon® E5507 (2.26GHz/4-core/80W/4MB) FIO Processor Kit | 601051-L21 |
| | HP ML330 G6 Intel® Xeon® E5506 (2.13GHz/4-core/4MB/80W) FIO Processor Kit | 535582-L21 |
| | HP ML330 G6 Intel® Xeon® E5504 (2.0GHz/4-core/4MB/80W) FIO Processor Kit | 535581-L21 |
| | HP ML330 G6 Intel® Xeon® W3540 (2.93GHz/4-core/8MB/130W) FIO Processor Kit | 512718-L21 |
| | HP ML330 G6 Intel® Xeon® W3520 (2.66GHz/4-core/8MB/130W) FIO Processor Kit | 512717-L21 |
| | Dual-Core Processors | |
| | HP ML330 G6 Intel® Xeon® E5503 (2.0GHz/2-core/80W/4MB) FIO Processor Kit | 601050-L21 |
| | HP ML330 G6 Intel® Xeon® E5502 (1.86GHz/2-core/4MB/80W) FIO Processor Kit | 535580-L21 |

Configuration Information - Factory Integrated Models

| | | |
|-----------------------|---|------------|
| HP Memory | HP ML330 G6 Intel® Xeon® W3505 (2.53GHz/2-core/130W/4MB) FIO Processor Kit | 573362-L21 |
| | HP ML330 G6 Intel® Xeon® W3503 (2.40GHz/2-core/130W/4MB) FIO Processor Kit | 573363-L21 |
| | NOTE: Xeon E5500 DP family supports both Registered DIMMs and Unbuffered DIMMs. Xeon W3500 UP family supports only Unbuffered DIMMs. | |
| | Registered DIMMs (RDIMMs) | |
| | HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 500656-B21 |
| | HP 4GB (1x4GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 500658-B21 |
| | HP 4GB (1x4GB) Quad Rank x8 PC3-8500 (DDR3-1066) Registered CAS-7 Low Power Memory Kit | 500660-B21 |
| | HP 4GB (1x4GB) Single Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 593339-B21 |
| | HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit | 604504-B21 |
| | NOTE: Low Voltage DIMMs can only be used with Intel® Xeon® processor 5600 series processors. | |
| | HP 8GB (1x8GB) Dual Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit | 516423-B21 |
| | HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 500662-B21 |
| | HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit | 604506-B21 |
| | NOTE: Low Voltage DIMMs can only be used with Intel® Xeon® processor 5600 series processors. | |
| | HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit | 500666-B21 |
| | Unbuffered with ECC DIMMs (UDIMMs) | |
| | HP 1GB (1x1GB) Single Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit | 500668-B21 |
| | HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit | 500670-B21 |
| | HP 4GB (1x4GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit | 500672-B21 |
| | NOTE: For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator . | |
| | NOTE: PC3L is a low voltage memory. | |
| HP Drive Cage Options | Non-Hot Plug HDD Model | |
| | HP SATA 5U G6 Module FIO Kit | 500448-B21 |
| | Hot Plug HDD Model | |
| | HP Hot Plug HDD Drive Cage Kit | 487737-B21 |
| | NOTE: Hot Plug SATA/SAS model and Non-hot plug SAS model requires a HP SATA or SAS RAID Controller. | |



Configuration Information - Factory Integrated Models

HP Hard Drives

NOTE: Non-Hot Plug Model only supports up to total 4 drives.

NOTE: Hot plug SATA model requires HP Smart Array B110i SATA RAID controller hot plug advanced key (516471-B21) and at least 1 HP HDD

NOTE: To reach maximum 8 LFF Drive support, it is required to purchase 2 Hot Plug HDD Drive Cage kit and Smart Array controller 8 ports or 2x 4 ports.

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Non-Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

HP 600GB 6G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive 516830-B21

HP 450GB 6G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive 516826-B21

HP 300GB 6G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive 516824-B21

NOTE: SAS non-hot plug drives require the Non-Hot Plug Internal SAS/SATA 4 port Cable kit (P/N 487734-B21) and a HP SAS/Smart Array Controller.

SATA Non-Hot Plug LFF (3.5-inch) Entry (ETY) Drives

HP 160GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Entry 1yr Warranty Hard Drive 458947-B21

SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HP 2TB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive 507774-B21

HP 1TB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive 507772-B21

HP 500GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive 458941-B21

HP Power supplies

It is highly recommended that you use the HP Power Advisor in defining the "Right-Size" power supply for your need. The HP Power Advisor is located at:

www.hp.com/go/hppoweradvisor

HP ML150G6 460 Watts Non-hot Plug Power Supply Factory Integrated Kit 500447-B21

HP 750W Common Slot High Efficiency Power Supply Kit 512327-B21

NOTE: The HP 750W power supply requires purchasing the Redundant Power Supply Enablement Kit (P/N 508544-B21).

Power Options

HP 5U G6 Redundant Power Supply Enablement Kit 508544-B21

NOTE: The Redundant Power Supply Enablement kit does not integrate any power supply. To enable full Redundancy, it requires 2 units of 750W Power supply.



Configuration Information - Factory Integrated Models

Step 3: Choose Additional Factory Integratable Options

| | | |
|------------------------|---|------------|
| HP Storage Controllers | NOTE: SAS non-hot plug drives require the Non-Hot Plug Internal SAS/SATA 4 port Cable kit (P/N 487734-B21) and a HP SAS/Smart Array Controller. | |
| | NOTE: HP NHP Internal SAS/SATA 4 Port Cable Kit (487734-B21) is required when adding Smart Array P410 Controller on Non-Hot Plug SATA/SAS server models. | |
| | HP Smart Array P212/256 1-ports Int/1-ports Ext PCIe x8 FIO SAS Controller | 491191-B21 |
| | HP Smart Array P410/ZM 2-ports Int PCIe x8 FIO SAS Controller | 462860-B21 |
| | HP Smart Array P410/256 2-ports Int PCIe x8 FIO SAS Controller | 491195-B21 |
| | HP Smart Array P411/256 2-ports Ext PCIe x8 FIO SAS Controller | 491193-B21 |
| | NOTE: SAS Controller supporting RAID 0/1/1+0/5. | |
| | Optional Upgrades | |
| | HP 256MB P-series Cache Upgrade | 462968-B21 |
| | NOTE: Supported HP Smart Array P212 and P410/ZM Controllers only. | |
| HP Insight Software | HP 512MB P-Series Battery Backed Write Cache Upgrade | 462967-B21 |
| | NOTE: Supported on HP Smart Array P410 Controller and HP Smart Array P411 Controller only. | |
| | HP 650 mAh P-Series Battery | 462969-B21 |
| | NOTE: To enable BBWC on the 256MB cache. | |
| | NOTE: Supported on HP Smart Array P212 Controller, HP Smart Array P410 Controller, and HP Smart Array P411 Controller only. | |
| | NOTE: To support RAID 5, HP P410 requires at least 256MB Cache | |
| | NOTE: To support RAID 6, HP P410 requires at least 256MB Cache + Battery + SAAP or 512MB BBWC + Smart Array Advanced Pack (SAAP) license key. | |
| | Smart Array P411 Controller. | |
| | HP Smart Array Advanced Pack including 1yr 24x7 Technical Support and Updates Single Server License | 516471-B21 |
| | NOTE: This part number can be used to purchase a single license or to order multiple licenses with a single activation key. Customers will receive a license entitlement certificate via e-mail. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Include one year of 24x7 HP Software Technical Support Services. | |
| HP Insight Software | HP Smart Array Hot Plug Advance Pack for B110i w/1yr 24x7 Supp Physical 1 Svr LTU | TC421A |
| | NOTE: It is required to purchase at least 1 HDD when ordering the Hot Plug Advance Pack. | |
| | HP Insight Control, No Media 1-Server License Factory-Integratable Option (FIO) including 1 year of 24x7 Technical Support and Updates | 582765-B21 |
| HP Insight Software | HP Insight Control for Linux, No Media 1-Server License Factory-Integratable Option (FIO) including 1 year of 24x7 Technical Support and Updates | TC203A |

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" or "Additional Options" section below.



Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

HP Processors

Six-Core Processors

HP ML330 G6 Intel® Xeon® X5650 (2.66GHz/6-core/95W/12MB) Processor Kit 603978-B21

Quad-Core Processors

HP ML330 G6 Intel® Xeon® E5640 (2.66GHz/4-core/80W/12MB) Processor Kit 607122-B21

HP ML330 G6 Intel® Xeon® E5630 (2.53GHz/4-core/80W/12MB) Processor Kit 603977-B21

HP ML330 G6 Intel® Xeon® E5620 (2.40GHz/4-core/80W/12MB) Processor Kit 603976-B21

HP ML330 G6 Intel® Xeon® E5540 (2.53GHz/4-core/80W/8MB) Processor Kit 512716-B21

HP ML330 G6 Intel® Xeon® E5530 (2.40GHz/4-core/80W/8MB) Processor Kit 512715-B21

HP ML330 G6 Intel® Xeon® E5520 (2.26GHz/4-core/80W/8MB) Processor Kit 512714-B21

HP ML330 G6 Intel® Xeon® E5507 (2.26 GHz/4-core/80W/4MB) Processor Kit 603975-B21

HP ML330 G6 Intel® Xeon® E5506 (2.13GHz/4-core/4MB/80W) Processor Kit 512713-B21

HP ML330 G6 Intel® Xeon® E5504 (2.0GHz/4-core/4MB/80W) Processor Kit 512712-B21

Dual-Core Processors

HP ML330 G6 Intel® Xeon® E5503 (2.0GHz/2-core/80W/4MB) Processor Kit 603974-B21

HP ML330 G6 Intel® Xeon® E5502 (1.86GHz/2-core/4MB/80W) Processor Kit 512711-B21

NOTE: Each Processor Kit includes (1) processor/(1) heatsink/ (1) Processor board. The Processor board integrated (1) processor socket and (9) DIMM slots.

NOTE: When two (2) Xeon E5500 processors are installed, the system QPI will be locked at 4.8 GT/s.

NOTE: Xeon E5500 DP family supports both Registered DIMMs and Unbuffered DIMMs. Xeon W3500 UP family supports only Unbuffered DIMMs.

HP Memory

Registered DIMMs (RDIMMs)

HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit 500656-B21

HP 4GB (1x4GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit 500658-B21

HP 4GB (1x4GB) Quad Rank x8 PC3-8500 (DDR3-1066) Registered CAS-7 Low Power Memory Kit 500660-B21

HP 4GB (1x4GB) Single Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit 593339-B21

HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit 604504-B21

NOTE: Low Voltage DIMMs can only be used with Intel® Xeon® processor 5600 series processors.

HP 8GB (1x8GB) Dual Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit 516423-B21

HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit 500662-B21



Core Options

| | |
|---|------------|
| HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit | 604506-B21 |
| NOTE: Low Voltage DIMMs can only be used with Intel® Xeon® processor 5600 series processors. | |
| HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit | 500666-B21 |
| Unbuffered with ECC DIMMs (UDIMMs) | |
| HP 1GB (1x1GB) Single Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit | 500668-B21 |
| HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit | 500670-B21 |
| NOTE: For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator . | |
| NOTE: PC3L is a low voltage memory. | |

| | | |
|-------------------|---|------------|
| HP Optical Drives | HP Half-Height SATA DVD-ROM Optical Drive | 447326-B21 |
| | HP Half-Height SATA DVD RW Optical Drive | 447328-B21 |

| | | |
|-----------------------|---|------------|
| HP Drive Cage Options | HP 5U Hot Plug HDD Drive Cage Kit | 487737-B21 |
| | NOTE: To reach maximum 8 LFF Drive support, it is required to purchase 2 Hot Plug HDD Drive Cage kit and Smart Array controller 8 ports or 2x 4 ports. | |

| | | |
|----------------|--|------------|
| HP Hard Drives | NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components. | |
| | NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details. | |
| | NOTE: SATA Hot Plug models require HP SAS Smart Array Controller. | |
| | NOTE: SAS Non-Hot Plug and SAS Hot Plug Models require HP SAS Smart Array Controller. | |
| | SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives | |
| | HP 600GB 6G SAS 15K rpm LFF (3.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive | 516828-B21 |
| | HP 450GB 6G SAS 15K rpm LFF (3.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive | 516816-B21 |
| | HP 300GB 6G SAS 15K rpm LFF (3.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive | 516814-B21 |
| | SAS Non-Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives | |
| | HP 600GB 6G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive | 516830-B21 |
| | HP 450GB 6G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive | 516826-B21 |



Core Options

HP 300GB 6G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive 516824-B21

SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) Dual Port Midline 1yr Warranty Hard Drive 507616-B21

HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) Dual Port Midline 1yr Warranty Hard Drive 507614-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html
(Worldwide)

SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HP 2TB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive 507632-B21

HP 1TB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive 454146-B21

HP 500GB 3G SATA 7.2K rpm LFF (3.5-inch) Midline 1yr Warranty Hard Drive 458928-B21

SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HP 2TB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive 507774-B21

HP 1TB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive 507772-B21

HP 500GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Midline 1yr Warranty Hard Drive 458941-B21

SATA Hot Plug LFF (3.5-inch) Entry (ETY) Drives

HP 250GB 3G SATA 7.2K rpm LFF (3.5-inch) Entry 1yr Warranty Hard Drive 571230-B21

HP 160GB 3G SATA 7.2K rpm LFF (3.5-inch) Entry 1yr Warranty Hard Drive 458945-B21

SATA Non-Hot Plug LFF (3.5-inch) Entry (ETY) Drives

HP 250GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Entry 1yr Warranty Hard Drive 571232-B21

HP 160GB 3G SATA 7.2K rpm LFF (3.5-inch) Non-hot Plug Entry 1yr Warranty Hard Drive 458947-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13021_div/13021_div.html
(Worldwide)

SATA Hot Plug 3.5" Midline (MDL) Solid State Drives

HP 60GB 3G SATA LFF (3.5-inch) Midline 1yr Warranty Solid State Drive 570761-B21

HP 120GB 3G SATA LFF (3.5-inch) Midline 1yr Warranty Solid State Drive 570763-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13415_div/13415_div.html
(Worldwide)



Core Options

HP Networking

Gigabit Ethernet Adapters

| | |
|---|------------|
| HP NC112T PCIe Gigabit Server Adapter | 503746-B21 |
| HP NC360T PCI Express Dual Port Gigabit Server Adapter | 412648-B21 |
| HP NC364T PCI Express Quad Port Gigabit Server Adapter | 435508-B21 |
| HP NC365T 4-port Ethernet Server Adapter | 593722-B21 |
| HP NC373F PCI Express Multifunction Gigabit Server Adapter | 394793-B21 |
| HP NC373T PCI Express Multifunction Gigabit Server Adapter | 394791-B21 |
| HP NC375T PCI Express Quad Port Gigabit Server Adapter | 538696-B21 |
| HP NC382T PCIe Dual Port Multifunction Gigabit Server Adapter | 458492-B21 |

10 Gigabit Ethernet Adapters

NOTE: No more than two 10GbE I/O devices are supported in a single ProLiant server.

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.

| | |
|--|------------|
| HP NC522SFP Dual Port 10GbE Server Adapter | 468332-B21 |
| HP NC550SFP Dual Port 10GbE Server Adapter | 581201-B21 |

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: www.hp.com/go/ProLiantNICs

HP I/O Expansion Options

| | |
|--|------------|
| HP iLO 2 PORT OPT KIT | 514206-B21 |
| HP Non-Hot Plug Internal SAS/SATA 4 Port Cable Kit | 487734-B21 |
| NOTE: SAS non-hot plug drives require the Non-Hot Plug Internal SAS/SATA 4 port Cable kit (P/N 487734-B21) and a HP SAS/Smart Array Controller. | |
| HP PCI-X Expander Kit (2 x 64-bit 100MHz PCI-X slots) | 488413-B21 |

HP Power Supplies

NOTE: It is highly recommended that you use the HP Power Advisor in defining the "Right-Size" power supply for your need. The HP Power Advisor is located at:

www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor

CAUTION: Optional Power Supplies used for Redundancy "must" match the original supplied power supply. Upgrades for more power headroom, when replacing the original power supplies must match if purchased for redundancy. Option Kits contain optional power supply, an IEC power cable and PDU IEC cables. In ProLiant Servers that have more than one power slot (bay), only same size power supplies are recommended. If non-matched power supplies are inserted you will get errors and operation will fail.

| | |
|---|------------|
| HP 750W Common Slot High Efficiency Power Supply Kit | 512327-B21 |
| NOTE: The HP 750W power supply requires purchasing the Redundant Power Supply Enablement Kit (P/N 508544-B21). | |

Power Options

| | |
|--|------------|
| HP Redundant Power Supply Enablement Kit | 508544-B21 |
| NOTE: The Redundant Power Supply Enablement kit does not integrate any power supply. To enable full Redundancy, it requires 2 units of 750W Power supply. | |



Core Options

| | | |
|--------------------|--|------------|
| HP Cooling Options | HP 5U G6 Redundant fan kit NOTE: Option Kits contain optional power supply, an IEC power cable and PDU IEC cables. | 513927-B21 |
|--------------------|--|------------|



Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

HP Insight Software

HP Insight Control

HP Insight Control, Single-Server License including 1 year of 24x7 Technical Support and Updates 452148-B22

HP Insight Control suite, No Media, Electronic License including 1 year of 24x7 Technical Support and Updates T9074BAE

HP Insight Control, Electronic License for bundling with ProLiant ML/DL server, including 1 year of 24x7 Technical Support and Updates TC278AAE

HP Insight Control, Tracking License for bundling with ProLiant ML/DL server, including 1 year of 24x7 Technical Support and Updates TC275A

HP Insight Software Media Kit 436222-B21

NOTE: Insight Software DVD media without licenses. Contains HP Systems Insight Manager, HP Insight Control, HP Insight Dynamics, HP Insight Control for Microsoft System Center, and Virtual Connect Enterprise Manager software. Uses an integrated installer to perform quick and accurate software installation and updates.

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Electronic software is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent.

NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.

NOTE: For additional license options please see the Insight Control QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html

HP Insight Control for Linux

HP Insight Control for Linux, 1-server license, including one year of 24x7 Technical Support and Updates, Electronic TC213AAE

HP Insight Control for Linux, No Media, 1-Server license, including one year of 24x7 Technical Support and Updates TC209A

HP Insight Control for Linux, Media pack (DVD) - No licenses included TC208A

NOTE: Media pack DVD contains the ISO image for HP Insight Control for Linux, HP Systems Insight Manager, HP Insight Control power management, HP Insight Control virtual machine management, and an integrated installer. Servers must be acquired separately.

NOTE: Licenses ship without media. The Media Kit for Insight Control for Linux can be ordered separately, or can be downloaded at: <http://www.hp.com/go/ic-linux> (click on Download button).

NOTE: Electronic software is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent.

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single set of activation keys.

NOTE: For additional License Kits, including electronic licensing options, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/13019_div/13019_div.html



Additional Options

HP Integrated Lights-Out (iLO) Advanced

HP Integrated Lights-Out Advanced, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates 512485-B21

HP ProLiant Essentials Integrated Lights-Out Advanced Pack, Electronic, including 1 year of 24x7 Technical Support and Updates TA850AAE

NOTE: This license allows 1 server to be deployed and managed via HP iLO Advanced. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.

NOTE: Electronic software is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent.

NOTE: For additional license kits, including electronic delivery options, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12362_div/12362_div.html

HP Insight Control server deployment

HP Insight Control server deployment Electronic License including 1 year 24x7 Technical Support and Updates T9082AAE

HP Insight Control server deployment 1-Server License including 1 year 24x7 Technical Support and Updates 452151-B21

NOTE: Licenses ship without media. The Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.

NOTE: Electronic licenses can be used to purchase multiple licenses with a single activation key, and is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent.

NOTE: Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.

NOTE: For additional license kits please see the Insight Control QuickSpecs at:

http://h18004.www1.hp.com/products/quickspecs/12631_div/12631_div.html

HP Security - TPM

HP Trusted Platform Module Option Kit 488069-B21

NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: www.hp.com/go/TPM.

NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment.

NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.

HP Storage Controllers

SAS Controllers

NOTE: SAS non-hot plug drives require the Non-Hot Plug Internal SAS/SATA 4 port



Additional Options

Cable kit (P/N 487734-B21) and a HP SAS/Smart Array Controller.

Smart Array P800 Controller

HP Smart Array P800/512 BBWC 2-ports Int/2-ports Ext PCIe x8 SAS Controller 381513-B21

Smart Array P212 Controller

HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller 462828-B21

HP Smart Array P212/256 1-ports Int/1-ports Ext PCIe x8 SAS Controller 462834-B21

Smart Array P410 Controller

NOTE: HP NHP Internal SAS/SATA 4 Port Cable Kit (487734-B21) is required when adding Smart Array P410 Controller on Non-Hot Plug SATA/SAS server models.

HP Smart Array P410/256 2-ports Int PCIe x8 SAS Controller 462862-B21

HP Smart Array P410/512 BBWC 2-ports Int PCIe x8 SAS Controller 462864-B21

HP Smart Array P410/512 FBWC 2-ports Int PCIe x8 SAS Controller 578230-B21

HP Smart Array P410/1G FBWC 2-ports Int PCIe x8 SAS Controller 572532-B21

Smart Array P411 Controller

HP Smart Array P411/256 2-ports Ext PCIe x8 SAS Controller 462830-B21

HP Smart Array P411/512 BBWC 2-ports Ext PCIe x8 SAS Controller 462832-B21

HP Smart Array P411/512 FBWC 2-ports Ext PCIe x8 SAS Controller 578229-B21

HP Smart Array P411/1G FBWC 2-ports Ext PCIe x8 SAS Controller 572531-B21

Smart Array P812 Controller

HP Smart Array P812/1G FBWC 2-ports Int/2-ports Ext PCIe x8 SAS Controller 487204-B21

Upgrade Options

HP Mini SAS to Mini SAS 33in Cable Assembly 496014-B21

NOTE: This cable option kit is needed to upgrade from hot plug SATA to hot plug SAS.

HP Hot Plug Internal SATA to Mini SAS Cable Kit 600732-B21

NOTE: This cable needed when upgrade from non-hot plug SATA to hot plug SATA.

HP 256MB P-series Cache Upgrade 462968-B21

NOTE: Supported on HP Smart Array P212 and P410/ZM Controllers only.

HP 512MB P-Series Battery Backed Write Cache Upgrade 462967-B21

HP 650 mAh P-Series Battery 462969-B21

NOTE: To enable BBWC on the 256MB cache.

NOTE: Supported on HP Smart Array P212 Controller, HP Smart Array P410 Controller, and HP Smart Array P411 Controller only.

HP 8484 to Mini SAS 33in Cable Assembly 591734-B21

NOTE: Cable for use connecting the Smart Array P800 Controller to internal hard disk drives on select HP ProLiant G6 Servers.

HP 512MB Flash Backed Write Cache 534916-B21

HP 1GB Flash Backed Cache 534562-B21

HP Smart Array Advanced Pack including 1yr 24x7 Technical Support and Updates Single Server License 516471-B21

NOTE: This part number can be used to purchase a single license or to order multiple licenses with a single activation key. Customers will receive a license entitlement certificate via e-mail. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Include one year of 24x7 HP Software Technical Support Services.



Additional Options

HP Smart Array Hot Plug Advance Pack for B110i w/1yr 24x7 Supp Physical 1 Svr LTU TC421A

NOTE: Please see the following QuickSpecs additional information:

http://h18000.www1.hp.com/products/quickspecs/12616_div/12616_div.html
(Smart Array P800 Controller)

http://h18000.www1.hp.com/products/quickspecs/13203_div/13203_div.html
(Smart Array P212 Controller)

http://h18000.www1.hp.com/products/quickspecs/13201_div/13201_div.html
(Smart Array P410 Controller)

http://h18000.www1.hp.com/products/quickspecs/13202_div/13202_div.html
(Smart Array P411 Controller)

http://h18000.www1.hp.com/products/quickspecs/13558_div/13558_div.html
(Smart Array P812 Controller)

http://h18000.www1.hp.com/products/quickspecs/13200_div/13200_div.html
(Smart Array Advanced Pack)

http://h18000.www1.hp.com/products/quickspecs/13495_div/13495_div.html
(Smart Array Hot Plug Advance Pack for B110i)

SAS HBA

HP SC08Ge 2-ports Ext PCIe x8 SAS Host Bus Adapter 488765-B21

HP Modular Smart Array SC08e 2-ports Ext PCIe x8 SAS Host Bus Adapter 614988-B21

NOTE: This is a 2 x4 External Port HBA

NOTE: This is only approved for the HP StorageWorks P2000 G3 SAS Modular Smart Array.

NOTE: Please see the HBA QuickSpecs for additional information:

http://h18004.www1.hp.com/products/quickspecs/13082_div/13082_div.html
(SC08Ge HBA)

http://h18004.www1.hp.com/products/quickspecs/13651_div/13651_div.html
(SC08e 6Gb HBA)

SCSI HBA

HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter 412911-B21

NOTE: Recommended HBA for SCSI tape drive connect.

NOTE: Please see the following QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.html
(SC11Xe HBA)

HP Backup & Recovery Software

Data Protector Express

HP Data Protector Express V5.0 for 1 Server E-LTU TC330AAE

HP Data Protector Express V5.0 for 3 Servers E-LTU TC331AAE

HP Data Protector Express V5.0 for 10 Servers E-LTU TC332AAE

HP Basic Upgrade to Data Protector Express V5 for 1 Server E-LTU TC333AAE

NOTE: One of these Data Protector Express base products is required. To see available options: <http://www.hp.com/go/dataprotectorexpress>



Additional Options

Tape Backup

NOTE: For the complete range of StorageWorks tape drives, autoloaders, libraries and media see: <http://www.hp.com/go/tape>. For hardware and software compatibility of HP StorageWorks tape backup products see: <http://www.hp.com/go/connect>.

Rack-Mount Tape Solutions

| | |
|--|--------|
| HP StorageWorks DAT 160 SCSI Internal Tape Drive | Q1573A |
| DAT 160 USB Internal Tape Drive | Q1580A |
| HP StorageWorks DAT 320 USB Internal Tape Drive | AJ825A |
| HP StorageWorks 1/8 G2 LTO-4 Ultrium 1760 SAS Tape Autoloader | AK377A |
| NOTE: Requires HP 1U Tape Autoloader Rack Kit (AH166A) for rack installation. | |
| HP StorageWorks DAT 320 SAS Internal Tape Drive | AJ830A |
| NOTE: Connection using HP P212 SAS Smart Array Controller (462828-B21) recommended. | |
| HP StorageWorks LTO-2 Ultrium 448 SAS Internal Tape Drive | DW085A |
| NOTE: Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended. | |
| HP StorageWorks LTO-3 Ultrium 920 SAS Internal Tape Drive | EH847A |
| NOTE: Connection using HP P212 SAS Smart Array Controller (462828-B21) recommended. | |
| HP StorageWorks LTO-4 Ultrium 1760 SAS Internal Tape Drive | EH919A |
| NOTE: Connection using HP P212 SAS Smart Array Controller (462828-B21) recommended. | |
| HP StorageWorks LTO-4 Ultrium 1840 SAS External WW Drive | EH861A |
| NOTE: Connection using HP P212 SAS Smart Array Controller (462828-B21) recommended. | |
| HP StorageWorks LTO-5 Ultrium 3000 SAS Internal Tape Drive | EH957A |
| NOTE: Connection using HP P212 SAS Smart Array Controller (462828-B21) recommended. | |
| HP StorageWorks LTO-5 Ultrium 3000 SAS External Tape Drive | EH958A |
| NOTE: Connection using HP P212 SAS Smart Array Controller (462828-B21) recommended. | |
| HP StorageWorks 1/8 G2 LTO-5 Ultrium 3000 SAS Tape Autoloader | BL536A |
| NOTE: Requires HP 1U Tape Autoloader Rack Kit (AH166A) for rack installation. | |
| Connection using HP P212 SAS Smart Array Controller (462828-B21) recommended. | |
| HP StorageWorks MSL2024 1 LTO-4 Ultrium 1760 SAS Drive Library | AK378A |
| HP StorageWorks MSL2024 Tape Library with one LTO-5 Ultrium 3000 SAS Drive | BL537A |
| NOTE: Connection using HP P212 SAS Smart Array Controller (462828-B21) recommended. | |
| HP StorageWorks MSL4048 1 LTO-4 Ultrium 1760 SAS Drive Library | AK380A |
| HP StorageWorks MSL4048 Tape Library with one LTO-5 Ultrium 3000 SAS Drive | BL538A |
| NOTE: Connection using HP P212 SAS Smart Array Controller (462828-B21) recommended. | |



Additional Options

Disk Backup

NOTE: For the complete range of StorageWorks D2D Backup Systems see: <http://www.hp.com/go/d2d>. For the complete range of StorageWorks RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HP StorageWorks disk backup products see: <http://www.hp.com/go/connect>.

HP StorageWorks D2D Backup Systems with Backup Data Deduplication

HP StorageWorks D2D2502i Backup System EJ001B

NOTE: 1.5TB of useable network disk backup capacity. Network connected appliance with connectivity using the iSCSI protocol. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended.

HP StorageWorks D2D2504i Backup System EJ002B

NOTE: 3.0TB of useable network disk backup capacity. Network connected appliance with connectivity using the iSCSI protocol. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended.

HP StorageWorks D2D4112fc Backup System EH993B

NOTE: 9.0TB (expandable to 18.0TB) of useable network disk backup capacity. Fibre Channel SAN connected appliance. Direct server attach is not supported, requires connection via SAN fabric.

HP StorageWorks RDX Removable Disk Backup Systems USB

HP StorageWorks RDX160 Internal Removable Disk Backup System AJ765A

NOTE: 160GB of disk capacity per data cartridge.

HP StorageWorks RDX320 Internal Removable Disk Backup System AJ767A

NOTE: For installation into 1U USB Rack-Mount Kit (A8007A). No peripheral bay available for drive installation into the server. 320GB of disk capacity per data cartridge.

HP StorageWorks RDX500 Internal Removable Disk Backup System AJ934A

NOTE: For installation into 1U USB Rack-Mount Kit (A8007A). No peripheral bay available for drive installation into the server. 500GB of disk capacity per data cartridge.

HP StorageWorks RDX750 Internal Removable Disk Backup System AW577A

NOTE: For installation into 1U USB Rack-Mount Kit (A8007A). No peripheral bay available for drive installation into the server. 750GB of disk capacity per data cartridge.

HP StorageWorks Options

StorageWorks SCSI HBA

HP U320e SCSI Host Bus Adapter AH627A

NOTE: Recommended HBA for MSL SCSI Tape Library connect.



Additional Options

| | | |
|----------------------------------|---|------------|
| HP Disk Storage Systems | MSA SAN Storage Arrays | |
| | HP StorageWorks 60 Modular Smart Array | 418408-B21 |
| | NOTE: Please see the QuickSpecs for additional options and configuration information at: http://h18000.www1.hp.com/products/quickspecs/12627_div/12627_div.html | |
| | HP StorageWorks 70 Modular Smart Array | 418800-B21 |
| | NOTE: Please see the QuickSpecs for additional options and configuration information at: http://h18000.www1.hp.com/products/quickspecs/12652_div/12652_div.html (Worldwide) | |
| | Disk Enclosures | |
| | HP StorageWorks D2600 Disk Enclosure | AJ940A |
| | HP StorageWorks D2700 Disk Enclosure | AJ941A |
| | NOTE: Please see the QuickSpecs for additional options and configuration information at: http://h18000.www1.hp.com/products/quickspecs/13404_div/13404_div.html | |
| | | |
| HP Uninterruptible Power Systems | HP Tower UPS | |
| | HP T1000 G3 UPS Models | |
| | HP T1000 G3 UPS, NA | AF448A |
| | HP T1000 G3 UPS, INTL | AF449A |
| | HP T1000J UPS, Japan | AF457A |
| | HP T1500 G3 UPS Models | |
| | HP T1500 G3 UPS, NA | AF450A |
| | HP T1500 G3 UPS, INTL | AF451A |
| | HP T1500J UPS, Japan | AF458A |
| | NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/13160_div/13160_div.html (Worldwide) | |
| | NOTE: For additional information on HP Uninterruptible Power Systems please go to: www.hp.com/products/ups . | |
| | NOTE: For additional information on sizing your server, please reference: http://www.upssizer.com | |
| | NOTE: Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords . | |

Additional Options

HP Rack Series

HP Rack 10000 G2 Series (Carbon/Graphite Metallic)

10642 G2 (42U) Rack Cabinet - Pallet

AF001A

10642 G2 (42U) Rack Cabinet - Shock Pallet

AF002A

NOTE: It is mandatory to use a shock pallet when shipping racks with equipment installed.

NOTE: Please see the QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:

http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.html
(Worldwide)

NOTE: For additional information regarding Rack Cabinets, please see the following URL: <http://www.hp.com/go/rackandpower>.

NOTE: The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. The 10000 G2 Series Racks provide enhanced airflow for maximum cooling, allowing these racks to be fully loaded with servers using the latest processors.

CAUTION: If a third-party rack is used, observe the following additional requirements to ensure adequate airflow and to prevent damage to the equipment: Front and rear doors: If your 42U server rack includes closing front and rear doors, you must allow 830 square inches (5,350 sq cm) of hole evenly distributed from top to bottom to permit adequate airflow (equivalent to the required 64 percent open area for ventilation). Side: The clearance between the installed rack component and the side panels of the rack must be a minimum of 2.75 inches (7 cm).

CAUTION: Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This arrangement ensures proper airflow. Using a rack without blanking panels results in improper cooling that can lead to thermal damage.

Quick deploy rail system provides tool-free support for racks with square or round mounting holes (including Compaq/HP 7000, 9000, 10000 G2 and HP series), with an adjustment range of 24" - 36". The ambidextrous cable management arm can be mounted on either the left or right side for improved cable management.

HP Rack Options

HP Server Console Switches

HP Server console switch 0x2x8

AF616A

HP Server console switch 0x2x16

AF617A

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/11834_div/11834_div.html
(Worldwide)

HP Server Console Switch G2 with Virtual Media & CAC

0x2x16 KVM Server Console G2 Switch with Virtual Media and CAC

AF618A

0x2x32 KVM Server Console G2 Switch with Virtual Media and CAC

AF619A

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13475_div/13475_div.html
(Worldwide)

HP IP Console Switch G2 with Virtual Media & CAC

1x1Ex8 KVM IP Console Switch G2 with Virtual Media and CAC

AF620A

2x1Ex16 KVM IP Console Switch G2 with Virtual Media and CAC

AF621A



Additional Options

4x1Ex32 KVM IP Console Switch G2 with Virtual Media and CAC AF622A

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13474_div/13474_div.html (Worldwide)

Rack Kit

HP Tower to Rack Conversion Tray Universal Kit 417705-B21

| | | |
|-----------------------|---|------------|
| HP USB and SD Options | HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver) | DC172B |
| | HP USB 04 Standard Keyboard | DT528A#ABA |
| | HP 4GB SD Flash Media Kit | 580387-B21 |
| | NOTE: Blank SD media device is supported for use with VMware and Citrix. SD media must be installed in the internal slot of the ProLiant server. Learn more at: http://www.hp.com/go/proliantvirtualization . | |
| | HP 2GB USB Flash Media Drive Key | 608447-B21 |
| | NOTE: HP qualified blank USB key for use with HP ProLiant servers that support the VMware virtualization environment and other HP value-add software like SmartStart. HP recommends this industry standard USB flash device for use with VMware ESXi. USB device must be installed in the internal slot of the ProLiant server for use with VMware ESXi. Refer to HP VMware Getting Started Guide for installation instructions. | |

| | | |
|-----------------------|--|--------|
| HP Care Pack Services | Hardware Services | |
| | Next Day Service, 3 Year | UM870E |
| | 4-Hour Service, 5-Day x 13-Hour Coverage, 3 Years | UM872E |
| | 4-Hour Service, 7-Day x 24-Hour Coverage, 3Years | UM874E |
| | 6-Hour Call to Repair, Service, 7-Day x 24-Hour Coverage, 3 Year | UM876E |
| | Other Services | |
| | 4-Hour Service, 5-Day x 13-Hour Coverage, 4 Years | UM880E |
| | 4-Hour Service, 7-Day x 24-Hour Coverage, 4Years | UM882E |
| | 4-Hour Service, 5-Day x 13-Hour Coverage, 5 Years | UM888E |
| | 4-Hour Service, 7-Day x 24-Hour Coverage, 5Years | UM890E |
| | Support Plus | |
| | Support Plus, MS, 3Years | UM894E |
| | NOTE: For more information, customer/resellers can contact: http://www.hp.com/services/carepack | |
| | | |



Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

DDR3 memory population guidelines

For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool:

www.hp.com/go/ddr3memory-configurator

Some DIMM installation guidelines are summarized below:

- For servers with eighteen (18) memory slots:
 - There are three (3) channels per processor; six (6) channels per server
 - There are three (3) DIMM slots for each memory channel; eighteen (18) total slots
 - Memory channel 1 consists of the three (3) DIMMs that are closest to the processor
 - Memory channel 3 consists of the three (3) DIMMs that are furthest from the processor
- DIMM slots that are white should be populated first
- Do not mix Unbuffered memory (UDIMMs) with Registered memory (RDIMMs)
- Do not install DIMMs if the corresponding processor is not installed
- If only one processor is installed in a 2CPU system, only half of the DIMM slots are available
- To maximize performance, balance the total memory capacity between all installed processors
- It is not required, but it is recommended to load the channels similarly if possible
- If any Quad rank DIMMs are installed, all channels are limited to only 2 DIMMs per channel.
- You can only install two quad-rank DIMMs per channel
- You can only install two UDIMMs per channel; if available, the third slot in the channel must remain empty
- Populate DIMMs from heaviest load (quad-rank) to lightest load (single-rank) within a channel
- Heaviest load (DIMM with most ranks) within a channel goes furthest from the chipset
- For memory mirroring mode, channel 3 must be unpopulated. Channels 1 and 2 are populated identically
- For lock-step mode, channel 3 must be unpopulated. DIMMs in channels 1 and 2 will be installed in pairs. The paired slots will be 1,4; 2,5; 3,6 on a 3DPC system or 1,4; 2,5; on a 2DPC system
- Low Voltage DIMMs can only be used with Intel® Xeon® processor 5600 series processors
- If mixing DIMM voltage is a requirement, please note that the DIMMs will run at 1.5V since all 1.35V are capable of supporting 1.5V operations

| DIMM slot/capacity/populated speed table | | | | | | | | | | |
|--|---------------------------|----------------|-------|------|--------|----------------|------|------------------------------------|----------------|-------|
| DIMM Type | Registered DIMMS (RDIMMs) | | | | | | | Unbuffered with ECC DIMMs (UDIMMs) | | |
| DIMM Rank | Single Rank (1R) | Dual Rank (2R) | | | | Quad Rank (4R) | | Single Rank (1R) | Dual Rank (2R) | |
| DIMM Capacity | 4GB | 2GB | 4GB | 8GB | 8GB | 4GB | 16GB | 1GB | 2GB | 4GB |
| DIMM Native Speed (MHz) | 1333 | 1333 | 1333 | 1066 | 1333 | 1066 | 1066 | 1333 | 1333 | 1333 |
| Voltage | LV/Reg | Reg | Reg | Reg | LV/Reg | Reg | Reg | Reg | Reg | Reg |
| SLOTS THAT CAN BE POPULATED | | | | | | | | | | |
| 18 slot servers | 18 | 18 | 18 | 18 | 18 | 12 | 12 | 12 | 12 | 12 |
| MAXIMUM CAPACITY (GB) | | | | | | | | | | |
| | 72 | 36 | 72 | 144 | 144 | 48 | 192 | 12 | 24 | 48 |
| POPULATED DIMM SPEED (MHz) | | | | | | | | | | |
| 1 DIMM Per Channel | 1333 | 1333 | 1333 | 1066 | 1333 | 1066 | 1066 | 1333 | 1333 | 1333 |
| 2 DIMM Per Channel | 1333* | 1333* | 1333* | 1066 | 1333* | 800 | 800 | 1333 | 1333 | 1333* |



Memory

| | | | | | | | | | | |
|--------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 3 DIMM Per Channel | 800 | 800 | 800 | 800 | 800 | n/a | n/a | n/a | n/a | n/a |
|--------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|

NOTES:

- PC3-10600 DIMMs have a maximum speed of 1333MHz. PC3-8500 DIMMs have a maximum speed of 1066MHz
- Mixing DIMM speeds is allowed, but the system processor speed rules always override the DIMM capabilities
- If you do mix DIMM speeds, the memory bus will default to the minimum clock rate of all DIMMs in the system - even if the slower DIMM is on the other processor
- If you install 1x 1066MHz DIMM in channel 1 and 1x 1333MHz DIMM in channel 2, the maximum speed will be 1066MHz If you install 1x 1066MHz DIMM in channel 1 and 5x 1333MHz DIMMs with 1 DIMM Per Channel (DPC) in each of the other channels, the maximum speed will be 1066MHz
- If you install 1x 1066MHz DIMM in channel 1 and 5x 1333MHz DIMMs with 1 DIMM Per Channel (DPC) in each of the other channels, you run at 1066MHz
- If you install 3DPC in one channel (if applicable) and 1DPC in all other channels, you run at 800MHz
- Maximum memory speed will also depend on the processor installed. References to the above MHz speeds are for the various speeds of DDR3 DIMMs; 1333 refers to DDR3-1333, etc.

DIMM slot and configuration diagrams

Basic memory slot & population diagram

- Population order; start with "A" first, "B" second, "C" third, etc.

| 18 DIMM SLOTS (9 per CPU node) | | | | | |
|--------------------------------|--------|------------------|--------|------------------|--------|
| | CPU1 | | CPU2 | | |
| | slot # | population order | slot # | population order | |
| Chnl 0 | 1 | G | 1 | G | Chnl 0 |
| | 2 | D | 2 | D | |
| | 3 | A | 3 | A | |
| Chnl 1 | 4 | H | 4 | H | Chnl 1 |
| | 5 | E | 5 | E | |
| | 6 | B | 6 | B | |
| Chnl 2 | 7 | I | 7 | I | Chnl 2 |
| | 8 | F | 8 | F | |
| | 9 | C | 9 | C | |

Standard memory configuration (1 CPU model)

- 4GB, consisting of three (2) 2GB dual-rank PC3-10600 RDIMMs (Base model)



Memory

| | CPU1 | | CPU2 | | |
|--------|--------|------------------|--------|------------------|--------|
| | slot # | population order | slot # | population order | |
| Chnl 1 | 1 | G; empty | 1 | G; empty | Chnl 1 |
| | 2 | D; empty | 2 | D; empty | |
| | 3 | A; 2GB DIMM | 3 | A; empty | |
| Chnl 2 | 4 | H; empty | 4 | H; empty | Chnl 2 |
| | 5 | E; empty | 5 | E; empty | |
| | 6 | B; 2GB DIMM | 6 | B; empty | |
| Chnl 3 | 7 | I; empty | 7 | I; empty | Chnl 3 |
| | 8 | F; empty | 8 | F; empty | |
| | 9 | C; empty | 9 | C; empty | |

Standard memory plus optional memory (1 CPU model)

- 60GB, consisting of two (2) 2GB RDIMMs plus seven (7) 8GB RDIMMs
 - 2x 2GB dual-rank PC3-10600 RDIMMs
 - 7x 8GB dual-rank PC3-8500 RDIMMs

| | CPU1 | | CPU2 | | |
|--------|--------|------------------|--------|------------------|--------|
| | slot # | population order | slot # | population order | |
| Chnl 1 | 1 | G; 8GB DIMM | 1 | G; empty | Chnl 1 |
| | 2 | D; 8GB DIMM | 2 | D; empty | |
| | 3 | A; 2GB DIMM | 3 | A; empty | |
| Chnl 2 | 4 | H; 8GB DIMM | 4 | H; empty | Chnl 2 |
| | 5 | E; 8GB DIMM | 5 | E; empty | |
| | 6 | B; 2GB DIMM | 6 | B; empty | |
| Chnl 3 | 7 | I; 8GB DIMM | 7 | I; empty | Chnl 3 |
| | 8 | F; 8GB DIMM | 8 | F; empty | |
| | 9 | C; 8GB DIMM | 9 | C; empty | |

Standard memory replaced with optional memory (1 CPU model) RDIMM maximum configuration

- 96GB, consisting of nine (6) 16GB dual-rank PC3-8500 RDIMMs

Memory

| | CPU1 | | CPU2 | | |
|--------|--------|------------------|--------|------------------|--------|
| | slot # | population order | slot # | population order | |
| Chnl 1 | 1 | G; empty | 1 | G; empty | Chnl 1 |
| | 2 | D; 16GB DIMM | 2 | D; empty | |
| | 3 | A; 16GB DIMM | 3 | A; empty | |
| Chnl 2 | 4 | H; empty | 4 | H; empty | Chnl 2 |
| | 5 | E; 16GB DIMM | 5 | E; empty | |
| | 6 | B; 16GB DIMM | 6 | B; empty | |
| Chnl 3 | 7 | I; empty | 7 | I; empty | Chnl 3 |
| | 8 | F; 16GB DIMM | 8 | F; empty | |
| | 9 | C; 16GB DIMM | 9 | C; empty | |

UDIMM maximum configuration (1 CPU model)

- 24GB, consisting of six (6) 4GB dual-rank PC3-10600 UDIMMs

| | CPU1 | | CPU2 | | |
|--------|--------|------------------|--------|------------------|--------|
| | slot # | population order | slot # | population order | |
| Chnl 1 | 1 | G; empty | 1 | G; empty | Chnl 1 |
| | 2 | D; 4GB DIMM | 2 | D; empty | |
| | 3 | A; 4GB DIMM | 3 | A; empty | |
| Chnl 2 | 4 | H; empty | 4 | H; empty | Chnl 2 |
| | 5 | E; 4GB DIMM | 5 | E; empty | |
| | 6 | B; 4GB DIMM | 6 | B; empty | |
| Chnl 3 | 7 | I; empty | 7 | I; empty | Chnl 3 |
| | 8 | F; 4GB DIMM | 8 | F; empty | |
| | 9 | C; 4GB DIMM | 9 | C; empty | |

Standard memory replaced with optional memory (2 CPU model)

RDIMM maximum configuration

- 192GB, consisting of eighteen (12) 16GB dual-rank PC3-8500 RDIMMs



Memory

| | CPU1 | | CPU2 | | |
|--------|--------|------------------|--------|------------------|--------|
| | slot # | population order | slot # | population order | |
| Chnl 1 | 1 | G; empty | 1 | G; empty | Chnl 1 |
| | 2 | D; 16GB DIMM | 2 | D; 16GB DIMM | |
| | 3 | A; 16GB DIMM | 3 | A; 16GB DIMM | |
| Chnl 2 | 4 | H; empty | 4 | H; empty | Chnl 2 |
| | 5 | E; 16GB DIMM | 5 | E; 16GB DIMM | |
| | 6 | B; 16GB DIMM | 6 | B; 16GB DIMM | |
| Chnl 3 | 7 | I; empty | 7 | I; empty | Chnl 3 |
| | 8 | F; 16GB DIMM | 8 | F; 16GB DIMM | |
| | 9 | C; 16GB DIMM | 9 | C; 16GB DIMM | |

UDIMM maximum configuration (2 CPU model)

- 48GB, consisting of twelve (12) 2GB dual-rank PC3-10600 UDIMMs

| | CPU1 | | CPU2 | | |
|--------|--------|------------------|--------|------------------|--------|
| | slot # | population order | slot # | population order | |
| Chnl 1 | 1 | G; empty | 1 | G; empty | Chnl 1 |
| | 2 | D; 4GB DIMM | 2 | D; 4GB DIMM | |
| | 3 | A; 4GB DIMM | 3 | A; 4GB DIMM | |
| Chnl 2 | 4 | H; empty | 4 | H; empty | Chnl 2 |
| | 5 | E; 4GB DIMM | 5 | E; 4GB DIMM | |
| | 6 | B; 4GB DIMM | 6 | B; 4GB DIMM | |
| Chnl 3 | 7 | I; empty | 7 | I; empty | Chnl 3 |
| | 8 | F; 4GB DIMM | 8 | F; 4GB DIMM | |
| | 9 | C; 4GB DIMM | 9 | C; 4GB DIMM | |


NOTE: Capacity references are rounded to the common Gigabyte values.

- 1GB = 1024MB
- 2GB = 2048MB
- 4GB = 4096MB
- 8GB = 8192MB

DDR3 memory options part number decoder



Memory

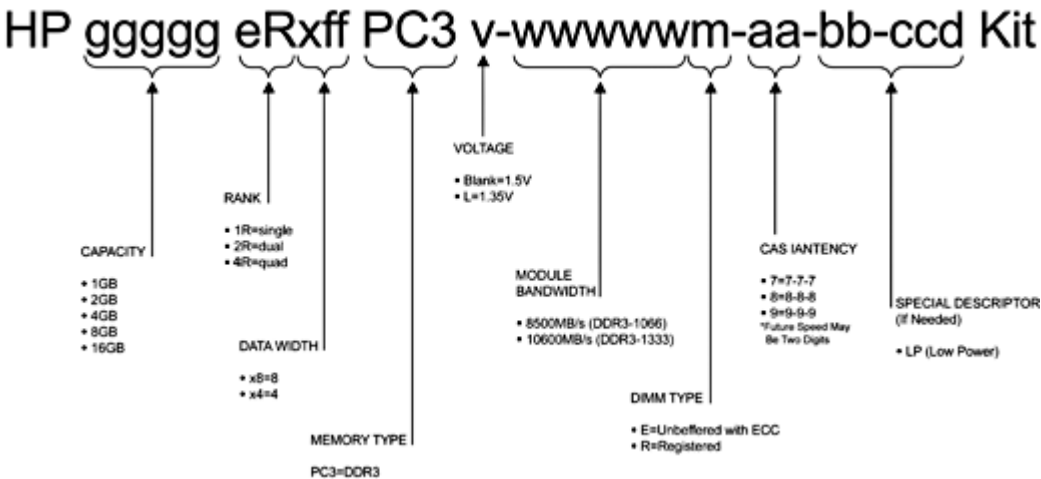

Following are memory options available from HP:

HP Memory

Registered DIMMs (RDIMMs)

| | |
|---|------------|
| HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 500656-B21 |
| HP 4GB (1x4GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 500658-B21 |
| HP 4GB (1x4GB) Quad Rank x8 PC3-8500 (DDR3-1066) Registered CAS-7 Low Power Memory Kit | 500660-B21 |
| HP 4GB (1x4GB) Single Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 593339-B21 |
| HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit | 604504-B21 |
| NOTE: Low Voltage DIMMs can only be used with Intel® Xeon® processor 5600 series processors. | |
| HP 8GB (1x8GB) Dual Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit | 516423-B21 |
| HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 500662-B21 |
| HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit | 604506-B21 |
| NOTE: Low Voltage DIMMs can only be used with Intel® Xeon® processor 5600 series processors. | |
| HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit | 500666-B21 |

Unbuffered with ECC DIMMs (UDIMMs)

| | |
|---|------------|
| HP 1GB (1x1GB) Single Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit | 500668-B21 |
| HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit | 500670-B21 |
| HP 4GB (1x4GB) Dual Rank x8 PC3-10600 (DDR3-1333) Unbuffered CAS-9 Memory Kit | 500672-B21 |




Memory

NOTE: For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator.

NOTE: PC3L is a low voltage memory.



Storage

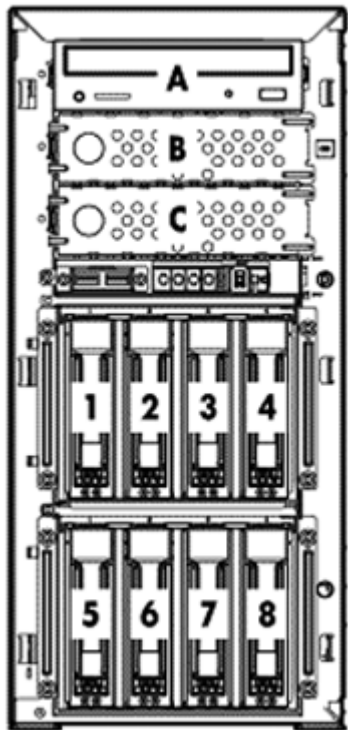

- A Optical Drive
- B,C Removable Media Bays- 1 full-height drive or 2 half-height drives
- 1-4 4 x 3.5" (LFF) Hot plug or Non hot-plug SATA/SAS hard drive bays (Standard)
- 5-8 4 x 3.5" (LFF) Hot plug SATA/SAS hard drive bays (Optional)

Drive Support

| | Quantity Supported | Position Supported | Controller |
|----------------------------|--------------------|--------------------|----------------------------|
| Removable Media | | | |
| SATA DVD-ROM Optical Drive | Up to 2 | A, B | Integrated SAS Controller |
| SATA DVD RW Optical Drive | Up to 2 | A, B | Integrated SATA Controller |

Hard Drives

NOTE: Transfer rates of drives are dependent on the maximum transfer rate supported by the HBA or Controller. Refer to the HBA or Controller technical specifications for details.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Supports up to Eight (8) SAS/SATA hard drives via 2nd Hot plug Hard Disk Drive module option kit and HP Smart Array P410 Controller.

SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

| | Quantity Supported | Position Supported | Controller |
|---------------------|--------------------|--------------------|--|
| 600GB 6G SAS 15K DP | Up to 8 | 1-8 | HP Smart Array P800/512 BBWC Controller |
| 450GB 6G SAS 15K DP | | | HP Smart Array P212/Zero Memory Controller |
| 300GB 6G SAS 15K DP | | | HP Smart Array P212/ 256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |



Storage

HP Smart Array P410/512 MB BBWC Controller
 HP Smart Array P410/512 MB FBWC Controller
 HP Smart Array P410/1G FBWC Controller
 HP Smart Array P411/256 MB Controller
 HP Smart Array P411/512 MB BBWC Controller
 HP Smart Array P411/512 MB FBWC Controller
 HP Smart Array P411/1G FBWC Controller
 HP Smart Array P812/1G Flash Backed Cache Controller

SAS Non-Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

| | Quantity Supported | Position Supported | Controller |
|---------------------|-----------------------|-----------------------|--|
| 600GB 6G SAS 15K DP | Up to 8 | 1-8 | HP Smart Array P800/512 BBWC Controller |
| 450GB 6G SAS 15K DP | | | HP Smart Array P212/Zero Memory Controller |
| 300GB 6G SAS 15K DP | | | HP Smart Array P212/ 256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |
| | | | HP Smart Array P410/512 MB FBWC Controller |
| | | | HP Smart Array P410/1G FBWC Controller |
| | | | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/512 MB FBWC Controller |
| | | | HP Smart Array P411/1G FBWC Controller |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |

SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives

| | Quantity Supported | Position Supported | Controller |
|--------------------|-----------------------|-----------------------|--|
| 2TB 6G SAS 7.2K DP | Up to 8 | 1-8 | HP Smart Array P800/512 BBWC Controller |
| 1TB 6G SAS 7.2K DP | | | HP Smart Array P212/Zero Memory Controller |
| | | | HP Smart Array P212/ 256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |
| | | | HP Smart Array P410/512 MB FBWC Controller |
| | | | HP Smart Array P410/1G FBWC Controller |
| | | | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/512 MB FBWC Controller |
| | | | HP Smart Array P411/1G FBWC Controller |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |

NOTE: Transfer rates of drives are dependent on the maximum transfer rate supported by the HBA or Controller. Refer to the HBA or Controller technical specifications for details.

SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives

| | Quantity Supported | Position Supported | Controller |
|------------------|-----------------------|-----------------------|--|
| 2TB 3G SATA 7.2K | Up to 8 | 1-8 | HP Smart Array P800/512 BBWC Controller |
| 1TB 3G SATA 7.2K | | | HP Smart Array P212/Zero Memory Controller |



Storage

500GB 3G SATA 7.2K

HP Smart Array P212/ 256 MB Controller
 HP Smart Array P410/256 MB Controller
 HP Smart Array P410/512 MB BBWC Controller
 HP Smart Array P410/512 MB FBWC Controller
 HP Smart Array P410/1G FBWC Controller
 HP Smart Array P411/256 MB Controller
 HP Smart Array P411/512 MB BBWC Controller
 HP Smart Array P411/512 MB FBWC Controller
 HP Smart Array P411/1G FBWC Controller
 HP Smart Array P812/1G Flash Backed Cache Controller
 HP Smart Array Hot Plug Advance Pack for B110i

SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives

| | Quantity Supported | Position Supported | Controller |
|-------------------|-----------------------|-----------------------|--|
| 2TB 3G SATA 7.2K | Up to 4 | 1-4 | Embedded Smart Array B110i SATA RAID Controller |
| 1TB 3G SATA 7.2K | | | HP Smart Array P800/512 BBWC Controller |
| 500GB 3G SATA 15K | | | HP Smart Array P212/Zero Memory Controller |
| | | | HP Smart Array P212/ 256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |
| | | | HP Smart Array P410/512 MB FBWC Controller |
| | | | HP Smart Array P410/1G FBWC Controller |
| | | | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/512 MB FBWC Controller |
| | | | HP Smart Array P411/1G FBWC Controller |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |

SATA Hot Plug LFF (3.5-inch) Entry (ETY) Drives

| | Quantity Supported | Position Supported | Controller |
|--------------------|-----------------------|-----------------------|--|
| 250GB 3G SATA 7.2K | Up to 8 | 1-8 | HP Smart Array P800/512 BBWC Controller |
| 160GB 3G SATA 7.2K | | | HP Smart Array P212/Zero Memory Controller |
| | | | HP Smart Array P212/ 256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |
| | | | HP Smart Array P410/512 MB FBWC Controller |
| | | | HP Smart Array P410/1G FBWC Controller |
| | | | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/512 MB FBWC Controller |
| | | | HP Smart Array P411/1G FBWC Controller |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |

SATA Non-Hot Plug LFF (3.5-inch) Entry (ETY) Drives

| | Quantity Supported | Position Supported | Controller |
|--|-----------------------|-----------------------|------------|
|--|-----------------------|-----------------------|------------|



Storage

| | | | |
|-------------------|---------|-----|--|
| 250GB 3G SATA 15K | Up to 4 | 1-4 | Embedded Smart Array B110i SATA RAID Controller |
| 160GB 3G SATA 15K | | | HP Smart Array P800/512 BBWC Controller |
| | | | HP Smart Array P212/Zero Memory Controller |
| | | | HP Smart Array P212/ 256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |
| | | | HP Smart Array P410/512 MB FBWC Controller |
| | | | HP Smart Array P410/1G FBWC Controller |
| | | | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/512 MB FBWC Controller |
| | | | HP Smart Array P411/1G FBWC Controller |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |

SATA Hot Plug 3.5" Midline (MDL) Solid State Drives

| | Quantity Supported | Position Supported | Controller |
|---------------------|--------------------|--------------------|--|
| 60GB 3.0G SATA SSD | Up to 8 | 1-8 | HP Smart Array P212/Zero Memory Controller |
| 120GB 3.0G SATA SSD | | | HP Smart Array P212/ 256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |
| | | | HP Smart Array P410/512 MB FBWC Controller |
| | | | HP Smart Array P410/1G FBWC Controller |
| | | | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/512 MB FBWC Controller |
| | | | HP Smart Array P411/1G FBWC Controller |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |

NOTE: To support 8 drives, the purchase of the optional HP HDD cage and possibly purchase a second SATA/SAS controller are required.

NOTE: SAS non-hot plug drives require the Non-Hot Plug Internal SAS/SATA 4 port Cable kit (P/N 487734-B21) and a HP SAS/Smart Array Controller.

NOTE: Hot Plug SATA/SAS model and Non-hot plug SAS model requires A HP SAS Controller.

Maximum Storage Capacity - SAS Models

| | |
|----------|----------------------------------|
| Internal | 16.0TB (8 x 2TB SAS hard drives) |
| Total | 16.0TB (8 x 2TB SAS hard drives) |

Maximum Storage Capacity - SATA Models

| | |
|----------|------------------------------|
| Internal | 16.0TB (8 x 2TB SATA drives) |
| Total | 16.0TB (8 x 2TB SATA drives) |



Storage

External Storage

| | Quantity Supported | Position Supported | Host Controller or Adapter |
|----------------------|--------------------|--------------------|--|
| D2700 Disk Enclosure | Up to 2 Up to 4 | External | HP Smart Array P212/ 256 MB Controller |
| | | | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P411/512 MB FBWC Controller |
| | | | HP Smart Array P411/1G FBWC Controller |

Tape and Disk Backup

NOTE: For the complete range of StorageWorks tape drives, autoloaders, libraries and media, including the internal fitting models, see: <http://www.hp.com/go/tape>. For the complete range of StorageWorks D2D Backup Systems see: <http://www.hp.com/go/d2d>. For the complete range of StorageWorks RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HP StorageWorks disk and tape backup products see: <http://www.hp.com/go/connect>.

| | Position Supported | Controller | Controller/HBA Option Kit Part Number |
|---|----------------------|--|---------------------------------------|
| HP StorageWorks SCSI Tape Drives | Internal or External | HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter | 412911-B21 |
| LTO-1 Ultrium 232 | | | |
| LTO-2 Ultrium 448 | | HP U320e SCSI Dual Channel Controller | AH627A |
| LTO-3 Ultrium 920 | | | |
| LTO-3 Ultrium 960 | | | |
| LTO4 Ultrium 1760 | | | |
| LTO-4 Ultrium 1840 | | | |
| DAT 40 | | | |
| DAT 72 | | | |
| DAT 160 | | | |
| HP StorageWorks SCSI Rack Mount Kits | External | HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter | 412911-B21 |
| 1U Rack-Mount Kit | | | |
| 3U Rack-Mount Kit | | | |
| HP StorageWorks USB Tape Drives | Internal or External | USB 2.0 Port | N/A |
| DAT 40 | | | |
| DAT 72 | | | |
| DAT 160 | | | |
| DAT 320 | | | |
| HP StorageWorks USB Rack Mount Kits | External | USB 2.0 Port | N/A |
| 1U USB Rack-Mount Kit | | | |
| HP StorageWorks SAS Tape Drives | Internal or External | HP Modular Smart Array SC44Ge 1-ports Int/1-ports Ext PCIe x8 SAS Host Bus Adapter | 416096-B21 |



Storage

DAT 160
DAT 320
LTO-2 Ultrium 448
LTO-3 Ultrium 920
LTO-4 Ultrium 1760
LTO-4 Ultrium 1840
LTO-5 Ultrium 3000
LTO-5 Ultrium 3280

NOTE: Please check the full compatibility information at:
<http://www.hp.com/go/connect>

**HP StorageWorks SAS
Rack Mount Kits**
1U Rack-Mount Kit
3U Rack-Mount Kit

External

HP Modular Smart Array SC44Ge 1-ports Int/1-ports Ext PCIe x8
SAS Host Bus Adapter

416096-B21

NOTE: Please check the full compatibility information at:
<http://www.hp.com/go/connect>

**HP StorageWorks SCSI
Tape Autoloaders,
External**
DAT 72x10 Autoloader
1/8 G2 Autoloader

External

HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus
Adapter

412911-B21

HP U320e SCSI Dual Channel Controller

AH627A

NOTE: Please check the full compatibility information at:
<http://www.hp.com/go/connect>

**HP StorageWorks SCSI
Tape Libraries, External**
MSL2024
MSL4048
MSL8096
MSL6000

External

HP U320e SCSI Dual Channel Controller

AH627A

NOTE: Please check the full compatibility information at:
<http://www.hp.com/go/connect>

**HP StorageWorks SAS
Tape Autoloaders and
Libraries, External**
1/8 G2 Autoloader
MSL2024
MSL4048
MSL8096

External

HP Modular Smart Array SC44Ge 1-ports Int/1-ports Ext PCIe x8
SAS Host Bus Adapter

416096-B21

NOTE: Please check the full compatibility information at:
<http://www.hp.com/go/connect>

**HP StorageWorks Fibre
Channel Tape Libraries**
MSL2024
MSL4048
MSL8096
MSL6000

External

Please consult the EBS connectivity matrix at:
<http://www.hp.com/go/ebs> for connectivity information and the
supported Fibre Channel HBAs shown in this QuickSpec.

**HP StorageWorks USB
RDX Removable Disk
Backup System**
RDX160
RDX320
RDX500

Internal or
External

USB 2.0 port

N/A



Storage

RDX750

| | | |
|---|----------|---|
| HP StorageWorks D2D Backup Systems, iSCSI D2D2500i D2D4000i | External | Embedded Network Controller. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended. |
|---|----------|---|

| | | |
|---|----------|---|
| HP StorageWorks D2D Backup Systems, Fibre Channel D2D4000fc | External | Direct server attach is not supported, requires connection via SAN fabric. See: http://www.hp.com/go/connect |
|---|----------|---|



Power Specifications

| | | | | | | |
|--|-------------|-----|-----|-----|-----|-----|
| 460W PSU Part Number, FIO | 500447-B21 | | | | | |
| Operational Input Voltage Range (Vrms) | 90 to 135 | | | | | |
| Frequency Range (Nominal) (Hz) | 47 to 66 Hz | | | | | |
| Nominal Input Voltage (Vrms) | 100 | 115 | 208 | 220 | 230 | 240 |
| Max Rated Output Wattage Rating | 460 | 460 | 460 | 460 | 460 | 460 |
| Nominal Input Current (A rms) | 10 | 10 | 5 | 5 | 5 | 5 |
| Max Rated Input Wattage Rating (Watts) | 760 | 760 | 700 | 700 | 700 | 700 |
| Max. Rated VA (Volt-Amp) | 850 | 850 | 830 | 830 | 830 | 830 |
| Efficiency (%) | 65 | 65 | 65 | 65 | 65 | 65 |
| Power Factor | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 |
| Leakage Current (mA) | 3.5 | 3.5 | 3.5 | 3.5 | 3.5 | 3.5 |
| Maximum Inrush Current (A peak) | 450 | 450 | 450 | 450 | 450 | 450 |
| Maximum Inrush Current duration (mS) | | | | | | |

| | | | | | | | |
|---|------------|------|------|------|------|------|------|
| HP 750W Common Slot High Efficiency Power Supply Kit | | | | | | | |
| Part Number | 512327-B21 | | | | | | |
| Input Voltage Range (V rms) | 100 to 240 | | | | | | |
| Frequency Range (Nominal) (Hz) | 50/60 | | | | | | |
| Nominal Input Voltage (Vrms) | 100 | 120 | 200 | 208 | 220 | 230 | 240 |
| Maximum Rated Output Wattage Rating | 750 | 750 | 750 | 750 | 750 | 750 | 750 |
| Nominal Input Current (A rms) | 8.9 | 7.4 | 4.3 | 4.1 | 3.9 | 3.7 | 3.6 |
| Maximum Rated Input Wattage Rating (Watts) | 857 | 847 | 824 | 824 | 820 | 820 | 820 |
| Maximum Rated VA (Volt-Amp) | 894 | 884 | 859 | 854 | 854 | 854 | |
| Efficiency (%) | 87.5 | 88.5 | 91 | 91 | 91.5 | 91.5 | 91.5 |
| Power Factor | 0.97 | | | | | | |
| Leakage Current (mA) | 0.42 | 0.50 | 0.83 | 0.87 | 0.92 | 0.96 | 1.00 |
| Maximum Inrush Current (A peak) | 30 | | | | | | |
| Maximum Inrush Current duration (mS) | 20 | | | | | | |
| Maximum British Thermal Unit Rating (BTU-Hr) | 2925 | 2892 | 2812 | 2812 | 2797 | 2797 | 2797 |

NOTE: It is highly recommended that you use the HP Power Advisor in defining the "Right-Size" power supply for your need. The HP Power Advisor is located at: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor



Technical Specifications

| | | | |
|---|---|---|---|
| System Unit | Dimensions (H x W x D) (W/O foot stand) | 7.87 x 16.81 x 24.13 in (200 x 427 x 613 mm) | |
| | Weight (approximate) | Maximum: (All hard drives, power supplies and processors installed) | 66.14 lb (30 kg) |
| | | Minimum: (One hard drive, power supply and processor installed) | 35.27 lb (16 kg) |
| | Input Requirements (per power supply) | Rated Line Voltage | 100 to 240 VAC |
| | | Rated Input Current | 7.1 Amps (at 120VAC) to 3.5 Amps (at 240 VAC) |
| | | Rated Input Frequency | 50 to 60 Hz |
| | | Rated Input Power | 852 W |
| | BTU Rating | Maximum | 460W - 1773 BTU / hr (at 120 VAC), 1715 (at 240 VAC) |
| | | | 750W - 2892 BTU / hr (at 120 VAC), 2797 (at 240 VAC) |
| | | | 1200W - 3530 BTU / hr (at 120 VAC), 4600 (at 240 VAC) |
| Power Specifications | To review typical system power ratings use the Power Calculator which is available via the online tool located at URL: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor | | |
| Power Supply Output (per power supply) | - Click on the system of interest. Example: ML330 G6 | | |
| | - Follow the instructions of the next screens. | | |
| | Rated Steady-State Power | 460 (750) W (at 100 VAC), 460 (750) W (at 200 VAC) | |
| | Maximum Peak Power | 460 (750) W (at 100 VAC), 460 (750) W (at 200 VAC) | |
| System Inlet Temperature | Operating | NOTE: See Power Supply Specifications tables for complete details on 460W PSU and optional 750W. | |
| | | 50° to 95° F (10° to 35° C) at sea level with an altitude derating of 1.8°F per 1,000 ft (1.0° C per every 305 m) above seal level to a maximum of 10,000 ft (3050 m) no direct sustained sunlight . Maximum rate of change is 18°F/hr (10°C/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 86°F (30°C). | |
| Relative Humidity (non-condensing) | Non-Operating | -22° to 140° F (-30° to 60° C) | |
| | Operating | 10% to 90% relative humidity (Rh), 82.4°F (28°C) maximum wet bulb temperature, non-condensing. | |



Technical Specifications

| | | | |
|----------------|--|--|--|
| | Non-operating** | 10% to 95% relative humidity (Rh), 101.7°F (38.7°C) maximum wet bulb temperature, non-condensing. | |
| Altitude | Operating | 10,000 ft (3000m). Maximum allowable altitude change rate is 1°C per 300m. | |
| | Non-Operating | 30,000 ft (9144m). Maximum allowable altitude change rate is 1°C per 300m. | |
| Acoustic Noise | Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). | | |
| | Idle (Fixed Disk Drives Spinning) | | |
| | L WAd (BELS) | 460W SPS (w/ non-redundant fan): 4.9B 460W SPS (w/ redundant fan): 5.1B 750W RPS (w/ non-redundant fan): 5.1B 750W RPS (w/ redundant fan): 5.3B | |
| | L-pAm | 460W SPS (w/ non-redundant fan): 31.4 dBA 460W SPS (w/ redundant fan): 33.7 dBA 750W RPS (w/ non-redundant fan): 33.4 dBA 750W RPS (w/ redundant fan): 33.8 dBA | |
| | Operating (Random Seeks to Fixed Disks) | | |
| | L WAd (BELS) | 460W SPS (w/ non-redundant fan): 4.9B 460W SPS (w/ redundant fan): 5.2B 750W RPS (w/ non-redundant fan): 5.3B 750W RPS (w/ redundant fan): 5.4B | |
| | L WAd (BELS) | 460W SPS (w/ non-redundant fan): 31.4 dBA 460W SPS (w/ redundant fan): 33.9 dBA 750W RPS (w/ non-redundant fan): 34.6 dBA 750W RPS (w/ redundant fan): 35.2 dBA | |
| | NOTE: The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. | | |
| | Emissions Classification (EMC) | FCC Rating | Class B |
| | | Normative Standards | CISPR 22; EN55022; EN55024; 47 CFR, FCC Rules and Regulations Part 15 Subpart B;VCCI Class B ITE; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3. |

NOTE: The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.



Technical Specifications

| | | | |
|---|--------------------------|--|--|
| HP Smart Array B110i SATA RAID Controller (RAID 0,1,10) | Dimensions | N/A (embedded) | |
| | Disk Drive and Enclosure | 3.0 Gbps SATA | |
| | Protocol Support | 64-bit | |
| | Architecture | 64-bit | |
| | SAS Connectors | 4 internal x1 SATA connectors | |
| | Software Upgradeable | Yes. HP Smart Array hot plug Advanced Pack No Media 1-Server license | |
| | Firmware | including 1yr 24x7 Technical Support | |
| | Maximum Capacity | 2TB | |
| | Memory Addressing | 6GB (maximum) | |
| | Logical Drives Supported | 2 (maximum) | |
| | RAID Support | RAID 1 (Mirroring) RAID 0 (Striping) RAID 10 | |

| | | | |
|---|---|-----------------------------|-------------|
| HP 250GB 3G SATA 7.2K NHP 3.5" MDL HDD | Capacity | 250,059MB | |
| | Height* | 1.028 in (26.1 mm) | |
| | Width | 4.00 in (101.6 mm) | |
| | Depth* | 5.787 in (147.0 mm) | |
| | Interface | Serial ATA | |
| | Transfer Rate (Maximum) | 3Gb/s | |
| | Native Command Queuing | N/A | |
| | Seek Time (typical reads, including settling) | Single Track | 1.0 ms |
| | | Average | <8.5 ms |
| | | Full-Stroke | 17.0 ms |
| | | Rotational Speed | 7,200 rpm |
| | Physical Configuration | Bytes/Sector | 512 |
| | | Logical Blocks | 488,397,168 |
| | Operating Temperature | 41° to 131° F (5° to 55° C) | |

* Maximum drive dimension

Technical Specifications

| | | | |
|--|-----------------------|------------------------------------|--|
| Embedded NC326i PCI Express Dual Port Gigabit Server Adapter | Network Interface | 10Base-T/100Base-TX/1000Base-TX | |
| | Compatibility | IEEE 802.3 10Base-T | |
| | | IEEE 802.3ab 1000Base-T | |
| | | IEEE 802.3u 100Base-TX | |
| | Data Transfer Method | PCI Express, four lanes (x4) | |
| | Controller | BCM5715C | |
| | Network Transfer Rate | 10Base-T (Half-Duplex) | 10 Mb/s |
| | | 10Base-T (Full-Duplex) | 20 Mb/s |
| | | 100Base-TX (Half-Duplex) | 100 Mb/s |
| | | 100Base-TX (Full-Duplex) | 200 Mb/s |
| | | 1000Base-TX (Half and Full-Duplex) | 2000Mb/s |
| | Connector | RJ-45 | |
| | Cable Support | 10Base-T | Categories 3, 4 or 5 UTP; up to 328 ft (100 m) |
| | | 10/100/1000Base-TX | Category 5 UTP; up to 328 ft (100 m) |

| | | |
|--|--------------------------------------|--|
| Environment-friendly Products and Approach | End-of-life Management and Recycling | Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green . To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. |
|--|--------------------------------------|--|

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2010 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.

