


contents

[Overview](#) [Standard Features and Configurable Components \(availability may vary by country\)](#) [After-Market Options \(availability may vary by region\)](#) [Technical Specifications](#) [Technical Specifications - Audio](#)
[Technical Specifications - Communications](#) [Technical Specifications - Graphics](#) [Technical Specifications - Data Storage Drives](#) [Technical Specifications - Input/Output Devices](#) [Technical Specifications - Removable Storage](#)
[Technical Specifications - Eco Data](#)

Overview


HP Compaq 6200 Pro Series

HP Compaq 6200 Pro Small Form Factor Business PC

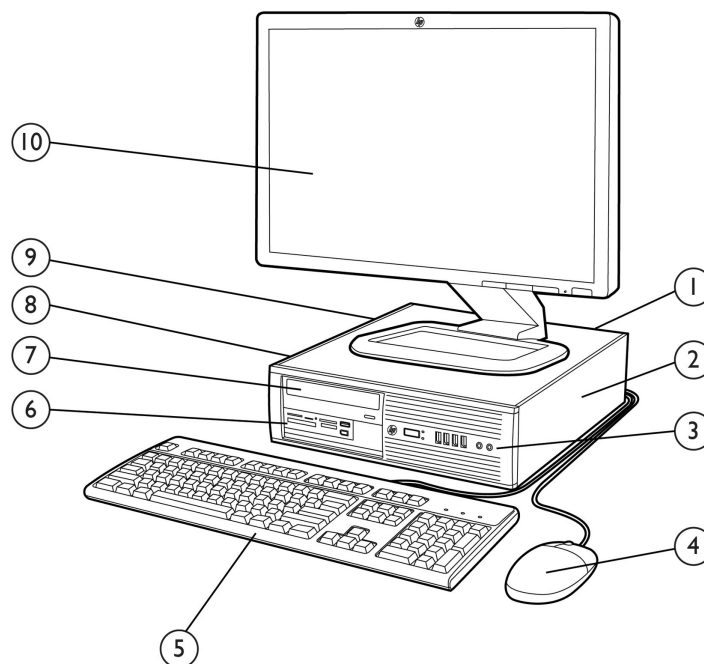

- 1 Rear I/O includes (6) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort v1.1a and VGA video interfaces, and 3.5mm audio in/out jacks
- 2 Low profile expansion slots include (1) PCI, (2) PCI Express x1 and (1) PCI Express x16 graphics
- 3 Front I/O includes (4) USB 2.0 ports, dedicated headphone output, and a microphone/headphone jack
- 4 HP Mouse
- 5 HP Keyboard
- 6 3.5" external drive bay supporting a media card reader or a secondary hard disk drive
- 7 5.25" external drive bay supporting an optical disk drive
- 8 3.5" internal drive bay supporting primary hard disk drive
- 9 240W standard or 90% high efficiency Power Supply
- 10 HP Monitor (sold separately)

HP Compaq 6200 Pro Microtower Business PC

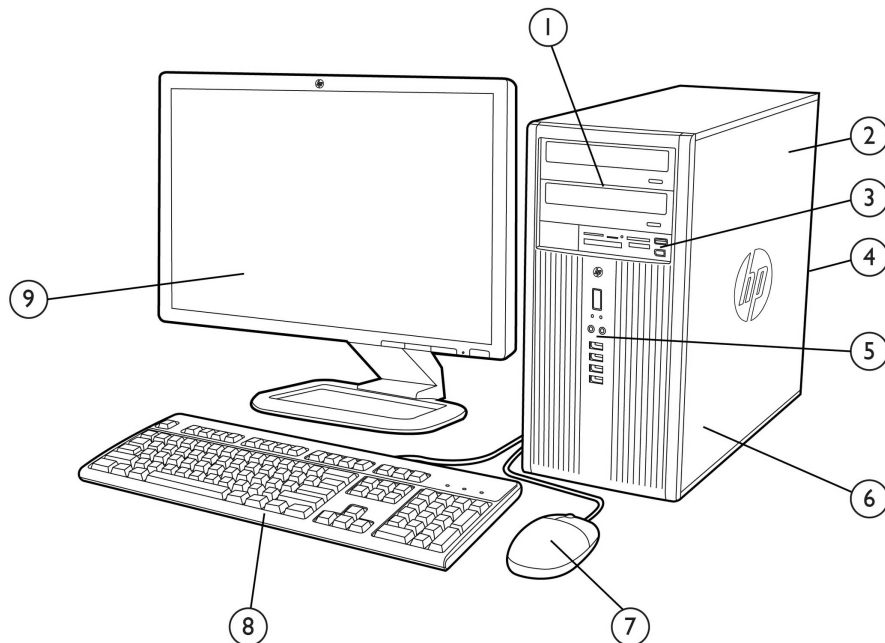

- 1 (2) 5.25" external drive bays supporting optical disk drives or removable hard disk drives; (2) 3.5" internal drive bays supporting hard disk drives
- 2 320W standard or 90% high efficiency Power Supply
- 3 3.5" external drive bay supporting the HP Media Card Reader
- 4 Rear I/O includes (6) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort v1.1a and VGA video interfaces, and 3.5mm audio in/out jacks
- 5 Front I/O includes (4) USB 2.0 ports, dedicated headphone output, and a microphone/headphone jack
- 6 Full height expansion slots include (1) PCI, (2) PCI Express x1 and (1) PCI Express x16 graphics
- 7 HP Mouse
- 8 HP Keyboard
- 9 HP Monitor (sold separately)

At A Glance

- Choice of two professional chassis form factors: SFF & MT
- PC chassis and all internal components and modules are 100% free of brominated flame retardants (BFRs) and Polyvinyl Chloride (PVC).
- UEFI BIOS developed and engineered by HP for better security, manageability and software image stability
- Intel Q65 Express chipset supporting Intel 2nd generation Core processors and featuring Intel HD Graphics)
- Intel 82579LM GbE integrated network connection
- DDR3 Synchronous Dynamic Random Access Memory (SDRAM)
- Integrated dual independent monitor support via VGA and digital DisplayPort v1.1a video interfaces
- Standard efficiency or 90% high efficiency energy saving power supplies available
- ENERGY STAR qualified
- Guaranteed lengthy purchase lifecycles and image stability
- Software image fully compatible across all models and form factors
- Created using industry leading Design for Environment standards
- Selected configurations with global availability easily set up and ordered through HP.com Business to Business portals (<http://h10019.www1.hp.com/business-site/index.html>)
- Tailored HP Factory Express deployment and lifecycle services available (<http://h71028.www7.hp.com/enterprise/cache/97688-0-0-225-121.aspx>)
- Protected by HP Services, including standard warranties up to 5-5-5 (terms and conditions vary by country; certain restrictions and exclusions apply)
- Tool-less serviceability features for easier upgrades and repairs

contents

[Overview](#) [Standard Features and Configurable Components \(availability may vary by country\)](#) [After-Market Options \(availability may vary by region\)](#) [Technical Specifications](#) [Technical Specifications - Audio](#)
[Technical Specifications - Communications](#) [Technical Specifications - Graphics](#) [Technical Specifications - Data Storage Drives](#) [Technical Specifications - Input/Output Devices](#) [Technical Specifications - Removable Storage](#)

Standard Features and Configurable Components (availability may vary by country)

Operating Systems

Preinstalled

Genuine Windows Vista Business)¹
 Genuine Windows Vista Home Basic¹
 Genuine Windows 7 Home Basic Edition (32-bit)²
 Genuine Windows 7 Home Premium Edition (32-bit or 64-bit)²
 Genuine Windows 7 Professional Edition (32-bit or 64-bit)²
 Genuine Windows 7 Ultimate Edition (32-bit or 64-bit)
 FreeDOS

Supported

Genuine Windows XP Professional Edition
 Genuine Windows Vista Enterprise Edition¹
 Genuine Windows 7 Enterprise Edition

Certified

Novell SUSE Linux Enterprise Desktop 11†
 Red Hat Enterprise Linux 64††

¹ Certain Windows Vista product features require advanced or additional hardware. Refer to the following web sites for details:

www.microsoft.com/windowsvista/getready/hardwareregs.mspix
www.microsoft.com/windowsvista/getready/capable.mspix

Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: www.windowsvista.com/upgradeadvisor

† The following features are not supported by Novell SUSE Linux Enterprise Desktop:

- Intel Gigabit CT Desktop NIC
- Broadcom NetXtreme Gigabit Ethernet Plus
- HP 22-in-1 Media Card Reader
- HP ProtectTools
- HP Blu-ray Writer playback of commercial movies
- DisplayPort video interface
- HP 2nd serial port adapter
- Power Management features
- Systems configured with Linux do not qualify for ENERGY STAR

†† The following features are not supported by Red Hat Enterprise Linux 64:

- TPM v1.2 embedded Security Chip
- Intel Gigabit CT Desktop NIC
- HP Wireless 802.11b/g/n NIC
- HP 22-in-1 Media Card Reader
- HP Blu-ray Writer
- HP FireWire / IEEE 1394 PCI Card
- HP 2nd serial port Adapter
- HP USB Smart Card (CCID) Keyboard
- AMD Radeon HD 6350 Graphics
- NVIDIA Quadro NVS 295 Graphics
- Power Management features
- Systems configured with Linux do not qualify for ENERGY STAR

Value Added Software (included with all models; not included when configured with FreeDOS)

HP Vision Diagnostics

PDF Complete Corporate Edition

Microsoft Office Trial Version

Value Added Software (included with select models; not included when configured with FreeDOS)

HP Power Assistant v2.0
 Computer Setup Utility
 Roxio Creator Business
 Norton Internet Security 2011¹
 HP Virtual Rooms

HP Total Care Advisor
 Corel WinDVD
 Firefox HP Virtual Browser 2011
 HP Direct Connect

¹ Includes a 60 day subscription for virus definition and minor program revision updates. Internet access required to receive updates.

HP Business PC Services and Feature

HP Stable Platform Program
 Intel Stable Platform Program
 Business-to-Business Portals

Factory Express Deployment and Lifecycle Services
 Trusted Platform Module (TPM v1.2 *
 HP Global Series Services

* TPM module disabled where restricted by law, i.e. Russia.

Service and Support

On-site warranty and service¹: This limited warranty and service offering delivers parts, labor and on-site repair for terms up to 5 years. Response time is next business day² and includes free telephone support³ 24 x 7. Global coverage² ensures any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. Some countries/regions do not offer one year onsite and labor.

¹ Terms and conditions may vary by country. Certain restrictions and exclusions apply

² On-site services may be provided pursuant to a service contract between HP and an authorized HP third party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country

³ Technical telephone support applies only to HP configured, HP and HP qualified third party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

Chipset

Intel Q65 Express

Processor

Intel® 2nd Generation Core™ i3 Processors

Intel Core i3-2100 Processor

3.10 GHz, 3M cache, 2 cores/4 threads

Intel Core i3-2120 Processor

3.30 GHz, 3M cache, 2 cores/4 threads

Intel® 2nd Generation Core™ i5 Processors

Intel Core i5-2400 Processor

3.10 GHz, 6M cache, 4 cores/4 threads

Intel Stable Image Platform Program (SIPP)

Intel Core i5-2500 Processor

3.30 GHz, 6M cache, 4 cores/4 threads

Intel Stable Image Platform Program (SIPP)

Intel® 2nd Generation Core™ i7 Processors

Intel Core i7-2600 Processor

3.40 GHz, 8M cache, 4 cores/8 threads

Intel Stable Image Platform Program (SIPP)

System Memory Support

The HP Compaq 6200 Elite Series supports the 2nd generation Intel® Core™ processor family. Based on a new PC micro-architecture, the processor is designed for a two-chip platform consisting of a processor and Platform Controller Hub (PCH). Unlike previous generations, the processor includes an integrated memory controller (IMC). The IMC supports DDR3 protocols with two independent, 64-bit wide channels each accessing one or two DIMMs.

- Two channels of non-ECC unbuffered DDR3 memory with a maximum of two UDIMMs per channel
- Single-channel and dual-channel memory organization modes
- Data burst length of eight for all memory organization modes
- DDR3 memory data transfer rates of 1066 MT/s (PC3-8500) and 1333 MT/s (PC3-10600)
- 64-bit wide channels
- DDR3 I/O voltage of 1.5V
- Maximum memory bandwidth of 10.6 GB/s in single-channel mode or 21 GB/s in dual-channel mode assuming DDR3

1333 MT/s (PC3-10600)

- 1GB, 2GB, and 4GB DDR3 DRAM technologies are supported. Using 4GB device technologies, the largest memory capacity possible is 32 GB, assuming dual channel mode with four x 8 GB dual ranked unbuffered DIMM memory configuration.

CAUTION: You must shut down the computer and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

Memory Configurations:


Slot 1 is black and must always be populated. Not all memory configurations possible are represented below.

NOTE:


For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Total Memory	Slot			
	Channel A		Channel B	
	1 (black)	2 (white)	3 (white)	4 (white)
2 GB	2 GB	unpopulated	unpopulated	unpopulated
4 GB (dual channel)	2 GB	unpopulated	2 GB	unpopulated
8 GB (dual channel)	2 GB	2 GB	2 GB	2 GB
16 GB (dual channel)	4 GB	4 GB	4 GB	4 GB

Small Form Factor

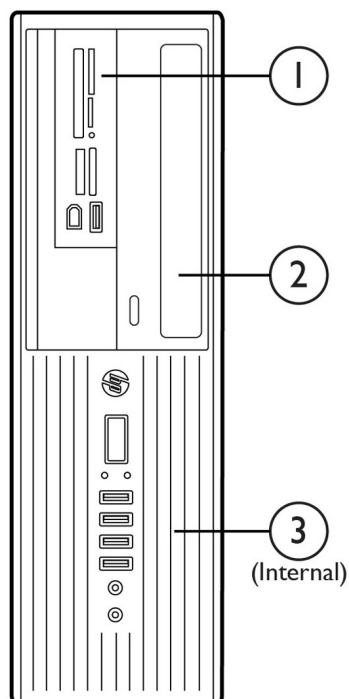

Microtower

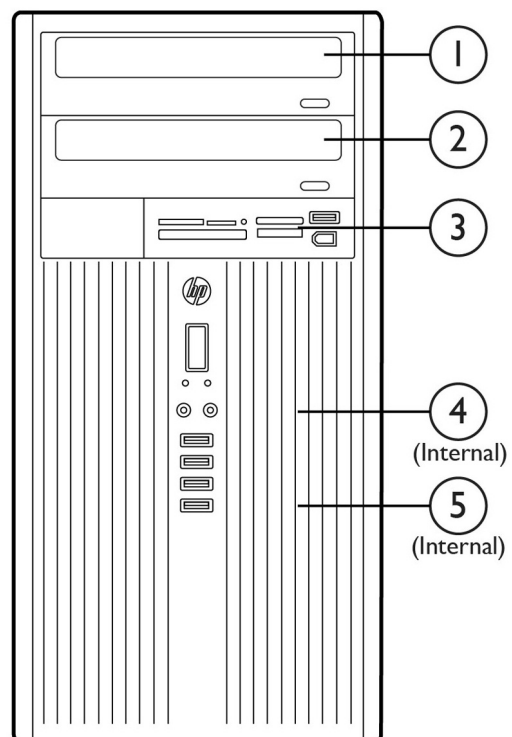

Storage Drive Support

	SFF			MT		
	MCR	ODD	HDD	MCR	ODD	HDD
Quantity Supported	1	1	2	1	2	2
Position	1	2	1,3	3	1,2	4,5

Data Storage Drives

160-GB Hard Disk Drives

HP 160GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive

Includes 3.5" adapter

250-GB Hard Disk Drives

HP 250-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

300-GB Hard Disk Drives

HP 300GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive

Includes 3.5" adapter

320-GB Hard Disk Drives

HP 320-GB 7.2K rpm SATA 3.0Gb/s 2.5" Self-Encrypting Drive

Includes 3.5" adapter

500-GB Hard Disk Drives

HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

1-TB Hard Disk Drives

HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

Solid State Drives

HP 80-GB SATA 3.0Gb/s Solid State Drive

Includes 3.5" adapter

HP 160-GB SATA 3.0Gb/s Solid State Drive

Includes 3.5" adapter

Optical Disc Drives

HP DVD-ROM Drive¹

HP SuperMulti DVD Writer Drive^{1,2,3}

HP Blu-ray Writer Drive

¹ For playing DVDs, Corel WinDVD 8

² For writing CDs, choice of Sonic/Roxio Easy Media Creator 9 or Roxio Business Creator 10

³ For writing CDs and DVDs, video editing and authoring DVDs, choice of Sonic/Roxio Easy Media Creator 9 or Roxio Business Creator 10

Media Card Readers

HP 22-n-1 Media Card Reader

Security Solutions and Capabilities

Trusted Platform Module (TPM) 1.2¹

Stringent security (via BIOS)²

SATA port disablement (via BIOS)

Drive lock

Serial, parallel, USB enable/disable (via BIOS)

Optional USB Port Disable at factory (user configurable via BIOS)

Removable media write/boot control

Power-On password (via BIOS)

Setup password (via BIOS)

HP Solenoid Hood Lock / Sensor

Support for chassis padlocks and cable lock devices

Intel Identify Protection Technology (IPT):

Models configured with Intel 2nd generation Core processors have the ability to utilize advanced security protection for online transactions. IPT, used in conjunction with participating web sites, provides double identity authentication by adding a hardware component in addition to the usual user name and password. IPT is initialized through an HP ProtectTools module (sold separately).

¹ TPM module disabled where use is restricted by law; for example, Russia.

² This setting is defaulted to disable, but when enabled, the PW jumper will not clear the BIOS pre-boot authentication passwords.

Network Interface Connections

Intel 82579LM integrated GbE Network Connection
 Intel Gigabit CT Desktop NIC (PCIe x1)
 HP 802.11 b/g/n Wireless NIC (PCIe x1)

Graphics

Intel HD Graphics (integrated)
 AMD FirePro 2270 Graphics (PCIe x16)
 AMD Radeon HD 6350 Graphics (PCIe x16)
 AMD Radeon HD 6450 Graphics (PCIe x16)
 AMD Radeon HD 6570 Graphics (PCIe x16)
[Available on the Microtower only](#)
 Nvidia Quadro NVS 295 Graphics (PCIe x16)
 Nvidia Quadro NVS 300 Graphics (PCIe x16)

HP DisplayPort Cable
 HP DisplayPort to DVI-D Adapter
 HP DisplayPort to HDMI Adapter
 HP DisplayPort to VGA Adapter

Multi-Media

High Definition Audio with Realtek ALC261 codec (all ports are stereo)
 Microphone/Headphone* and dedicated headphone front ports (3.5mm)
 Line-out and Line-In rear Ports* (3.5mm)
 Multi-streaming capable*
 Internal Speaker (standard)
 HP Thin USB Powered Speakers

* The front microphone port is re-taskable as a Line-in, Microphone-in or Headphone-in port. Rear audio input ports are re-taskable as a Line-in or Microphone-in port. External speakers must be powered externally. Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks. This allows for different audio applications to use separate audio ports on the system. For example, the front jacks could be used with a headset for a communications application while the rear jacks are being used with external speakers and a multimedia application.

Input/Output Devices

HP PS/2 Standard Keyboard
 HP USB Standard Keyboard
 HP USB Keyboard with USB ports
 HP USB Smart Card (CCID) Keyboard
 HP USB Mini Keyboard
 HP USB and PS/2 Washable Keyboard

HP PS/2 Optical Mouse
 HP USB Optical Mouse
 HP USB Laser Mouse
 HP USB and PS/2 Washable Mouse

Miscellaneous Devices and Configurations

HP FireWire IEEE 1394 PCIe x1 Card
 HP SuperSpeed USB 3.0 PCIe x1 Card
 HP Serial Port Adapter (RS-232 compatible); provides 2nd Serial Port
 HP Parallel Port Adapter
 HP eSATA Port Adapter
 HP SFF Tower Stand

contents

[Overview](#) [Standard Features and Configurable Components \(availability may vary by country\)](#) [After-](#)

[Market Options \(availability may vary by region\)](#)
 [Technical Specifications](#)
 [Technical Specifications - Audio](#)
[Technical Specifications - Communications](#)
 [Technical Specifications - Graphics](#)
 [Technical Specifications -](#)
[Data Storage Drives](#)
[Technical Specifications - Input/Output Devices](#)
[Technical Specifications - Removable Storage](#)
[Technical Specifications - Eco Data](#)

After-Market Options (availability may vary by region)

Communication Devices

	Part Number
Intel Gigabit CT Desktop NIC (PCIe x1)	FH969AA
Broadcom NetXtreme GbE Ethernet Plus NIC (PCIe x1)	FS215AA
HP Wireless 802.11 b/g/n NIC (PCIe x1)	FH971AA

Graphics Solutions

	Part Number
AMD FirePro 2270 Graphics (PCIe x16)	QK551AA
AMD Radeon HD 6350 Graphics (PCIe x16)	QK638AA
AMD Radeon HD 6450 Graphics (PCIe x16)	QM229AA
Nvidia Quadro NVS 295 Graphics (PCIe x16)	FY943AA
Nvidia Quadro NVS 300 Graphics (PCIe x16)	BV456AA

HP DisplayPort Cable Kit	VN567AA
HP DisplayPort To Dual Link DVI-D Adapter	NR078AA
HP DisplayPort To DVI-D Adapter	FH973AA
HP DisplayPort to HDMI Adapter	BP937AA
HP DisplayPort to VGA Adapter	AS615AA
HP DMS-59 to Dual DVI Cable	DL139A

Data Storage Drives and Accessories

	Part Number
HP 160GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive Includes 3.5" adapter	FX618AA
HP 300GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive Includes 3.5" adapter	FX619AA
HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive	QK554AA
HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive	QK555AA
HP 80-GB SATA 3.0Gb/s Solid State Drive	BM848AA
HP 160-GB SATA 3.0Gb/s Solid State Drive	BW321AA
HP eSATA Adapter	FH966AA
HP Removable SATA Hard Drive Enclosure (frame & carrier)	RY102AA
HP Removable SATA Hard Drive Enclosure (carrier only)	RY103AA

Input Devices

	Part Number
HP PS/2 Standard Keyboard	DT527A
HP USB Standard Keyboard	DT528A
HP USB Keyboard with USB ports	BT330AA
HP USB Mini Keyboard	AS601AA
HP USB Gray Keyboard	DT529A
HP USB Smart Card (CCID) Keyboard	BV813AA
HP USB Keyboard and Mouse Kit	RC465AA
HP USB Washable Keyboard	VF097AA
HP USB and PS/2 Washable Mouse	BM866AA
HP USB and PS/2 Washable Keyboard and Mouse Kit	BU207AA
HP PS/2 Optical Mouse	EY703AA
HP USB Optical Mouse	DC172AT

HP USB Laser Mouse	GW405AT
HP USB Travel Mouse	RH304AA
<hr/>	
HP 2.4GHz Wireless Keyboard and Mouse	NB896AA

System Memory

	Part Number
HP 1 GB DIMM	AT023AA
HP 2 GB DIMM	AT024AA
HP 4 GB DIMM	VH638AA

Multi-Media Devices

	Part Number
HP Thin USB Powered Speakers	KK912AA
HP DVD-ROM Drive	AR629AA
HP SuperMulti DVD Writer Drive	AR630AA
HP Blu-ray Writer Drive	AR482AA

Removable Media Storage

	Part Number
HP USB External Diskette Drive	DC141B
HP 22-n-1 Media Card Reader	AR941AA

Security Devices

	Part Number
HP/Kensington MicroSaver Cable Lock	PC766A
HP Business PC Security Lock	PV606AA
HP SFF Solenoid Lock and Hood Sensor	BP428AA
HP MT Solenoid Lock and Hood Sensor	DE618A
HP SFF Wall Mount/Security Sleeve	VN570AA
HP Keyed Lock Cable	BV411AA

HP Client Automation Software

	Part Number
HP Client Automation - Standard Edition (single seat)	T3488AA
HP Client Automation - Standard Edition (10 seats)	TA599AA
HP Client Automation - Standard Edition (100 seats)	TA600AA
HP Client Automation - Standard Edition (500 seats)	TA601AA
HP Client Automation - Standard Edition (1,000 seats)	T3489AA

Stands and Accessories

	Part Number
HP Integrated Work Center Stand (SFF)	QK549AA
HP SFF Tower Stand	VN569AA
HP Serial Port Adapter (RS-232 compatible)	PA716A
HP Parallel Port Adapter	KD061AA
HP 5.25" Blank Bezel Kit (50 pack)	DC177B
HP FireWire IEEE 1394 Card	PA997A
HP SuperSpeed USB 3.0 Card	BM867AA

contents

[Overview](#) [Standard Features and Configurable Components \(availability may vary by country\)](#) [After-Market Options \(availability may vary by region\)](#) [Technical Specifications](#) [Technical Specifications - Audio](#)
[Technical Specifications - Communications](#) [Technical Specifications - Graphics](#) [Technical Specifications - Data Storage Drives](#) [Technical Specifications - Input/Output Devices](#) [Technical Specifications - Removable Storage](#)
[Technical Specifications - Eco Data](#)

Technical Specifications

Weights & Dimensions

SFF

MT

(configured with 1 HDD and 1 ODD)

Chassis (H x W x D)	4.0 x 13.3 x 14.9 in (100 x 338 x 379 mm)	14.9 x 7.0 x 17.0 in (377 x 177 x 431 mm)
System Volume	782.77 cu in (12.8 liters)	1739 cu in (28.5 liters)
Tower Stand (H x W x D)	1.1 x 7.0 x 7.9 in (29 x 178 x 200 mm)	N/A
Packaging (H x W x D)	9.0 x 19.7 x 23.4 in (229 x 500 x 594 mm)	19.7 x 12.2 x 23.6 in (500 x 310 x 600 mm)
System Weight*	16.7 lb (7.6 kg)	20.5 lb (9.3 kg)
Shipping Weight*	17.9 lb (8.1 kg)	28.8 lb (13.1 kg)
Max Supported Weight (desktop orientation)	77.0 lb (35.0 kg)	N/A

I/O Ports

USB 2.0	Front - four (4) ports Rear - six (6) ports
Serial	one RS-232 compatible port standard second port available optionally
Parallel	one port available as an option
eSATA	one port available as an option
PS/2	color coded support for keyboard (purple) and mouse (green)
Video	VGA and DisplayPort v1.1a provide integrated dual independent monitor support
DVI output	available via optional DisplayPort to DVI Adapter
Audio	Front - microphone & headphone Rear - line input (supports microphone or line input), line out All ports are 3.5mm in diameter NOTE: See Audio/Visual section for information on re-taskable audio ports.
NIC	Industry standard RJ-45 port accesses the integrated network interface controller

Slots

	SFF	MT
5-volt PCI	1 each 2.5" low profile 6.6" length 25W max. power	1 each 4.2" full height 6.6" length 25W max. power
PCI Express x1	2 each 2.5" low profile 6.6" length 10W max. power	2 each 4.2" full height 6.6" length 10W max. power
PCI Express x16 (Primary)	1 each 2.5" low profile 6.6" length 25W max. power	1 each 4.2" full height 6.6" length 75W max. power

Bays

	SFF	MT
3.5" external	1 bay available for Media Card Reader unless used for a secondary hard drive	
5.25" external	1 each 8.19" depth	2 each 8.19" depth
Internal HDD Bays	1 each 3.5" drives	2 each 3.5" drives

Controller

Hard Drive Controller	Serial ATA 3.0 (6.0 Gb/s)
Host SATA Controller	Advanced Host Controller Interface (AHCI) Revision 1.2. The specification includes a description of the hardware/software interface between system software and the host controller hardware.

Unit Environment and Operating Conditions

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that

unit is operated within the specified operating range.

- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range	Operating: 50° to 95° F (10° to 35° C) * Non-operating: -22° to 140° F (-30° to 60° C)
Relative Humidity	Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m)

* Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

Power Supply

SFF

MT

Standard Efficiency	240W active PFC	320W active PFC
High Efficiency*	240W active PFC 87/90/87% efficient @ 20/50/100% load	320W active PFC 87/90/87% efficient @ 20/50/100% load
Operating Voltage Range	90 - 264 VAC	
Rated Voltage Range	100 - 240 VAC	
Rated Line Frequency	50/60 Hz	
Operating Line Frequency Range	47 - 63 Hz	
Rated Input Current	4A	5.5A
Rated Input Current with Energy Efficient* Power Supply	4A	5.5A
Current Leakage (NFPA 99)	< 275 µA	< 450 µA
Power Supply Fan	92mm variable speed	
Power Cord Length	6.0 ft. (1.83 m)	

* High efficiency power supply is a requirement for ENERGY STAR qualification in conjunction with a select range of processors and modules

ROM BIOS Information

Key features of the HP BIOS include:

- Deployment and manageability - HP BIOS provides several technologies that help integrate the HP Compaq 6200 Pro Series PC into the enterprise, such as PXE, remote configuration, remote control, and F10 Setup support for 12 languages.
- Stability - HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- Supports UEFI specification 2.1
- Thermal and power management - The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Business Desktop computer in any enterprise environment.
- Acoustic performance - Industry leading acoustic emissions across the range of operating conditions.
- Serviceability - HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery - HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (DOSFlash), BIOS updates from within Windows (HPQFlash), HP Client Manager, and fail-safe recovery. In addition, the HP Business Desktop BIOS Utilities tool enables replicated BIOS setup throughout the Enterprise; it is available from within the BIOS software and from the support website.
- HP BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery.

Additional HP BIOS Features

- Power-On password - Helps prevent an unauthorized user from powering on the system.
- Administrator password - Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) - Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. HP

Compaq business PCs use ACPI to provide power conservation features.

S5 Max Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 1W in S5 (when turned off). When S5 Max Power Savings feature is enabled power to slots is turned off along with WOL functionality.

Other Features

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
 - System Management BIOS v2.6
 - Intel Wired for Management support; industry wide initiative to make Intel architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
 - Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button
-

Serviceability Features

- Dual colored power LED on front of computer to indicate either normal or fault condition
 - Diagnostic LED Explanation Table:
 - Number of 1-second red LED blinks followed by a 2-second pause, then repeats:
 - 2 - processor thermal protection activated
 - 3 - processor not installed
 - 4 - power supply failure
 - 5 - memory error
 - 6 - video error
 - 7 - PCA failure (ROM detected failure prior to video)
 - 8 - invalid ROM, bootblock recovery mode
 - 9 - system not fetching code
 - 10 - system hang while loading an option ROM
 - System/Emergency ROM
 - Flash ROM
 - CMOS Battery Holder for easy replacement
 - Flash Recovery with Video Configuration Record Software
 - 5 Aux Power LED on System PCA
 - Processor ZIF Socket for easy Upgrade
 - Over-Temp Warning on Screen (Requires IM Agents)
 - Clear Password Jumper
 - DIMM Connectors for easy Upgrade
 - Clear CMOS Button
 - NIC LEDs (integrated) (Green & Amber)
 - Dual Color Power and HD LED - To Indicate Normal Operations and Fault Conditions
 - Color coordinated cables and connectors
 - Tool-less Hood Removal
 - Front power switch
 - System memory can be upgraded without removing the system board or any internal components
 - Tool-less Hard Drive, CD & Diskette Removal
 - Green Pull Tabs, and Quick Release Latches for easy identification
-

Additional Features

	Description
Towerable Orientation	SFF can be oriented as either a desktop or a tower
Drive Lock	Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided. DPS Access through F10 Setup during Boot
Drive Protection System	A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted
SMART I - Drive Failure Prediction	Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count
SMART II - Off-Line Data Collection	By avoiding actual hard drive failures, SMART hard drives act as "insurance"
SMART III - Off-Line Read Scanning with	against unplanned user downtime and potential data loss from hard drive failure

Defect Reallocation	IOEDC: I/O Error Detection Circuitry
SMART IV - End-to-End CRC for hard drives	Detects errors in Read/Write buffers on HDD cache RAM Interface in F10 setup provides confirmation of SMART IV support.

contents

[Overview](#) [Standard Features and Configurable Components \(availability may vary by country\)](#) [After-Market Options \(availability may vary by region\)](#) [Technical Specifications](#) [Technical Specifications - Audio](#)
[Technical Specifications - Communications](#) [Technical Specifications - Graphics](#) [Technical Specifications - Data Storage Drives](#) [Technical Specifications - Input/Output Devices](#) [Technical Specifications - Removable Storage](#)
[Technical Specifications - Eco Data](#)

Technical Specifications - Audio

High Definition Audio

Type	Integrated
HD Stereo Codec	Realtek 2-channel ALC261 codec
Audio I/O Ports	Front microphone-In (150-K ohm Input Impedance) Rear Line-In/Microphone input (150-K ohm Input Impedance, function is configurable by audio driver) Rear Line-Out* (190 ohms Output Impedance, expects at least a 10-K ohm load) Front Headphone-Out (0.5 Ohm Output Impedance, expects at least a 32 ohm load) Front Microphone/Headphone jack is re-task able to provide Microphone input, line-in or Headphone output to support connecting two headphones to the front of the system. When configured as a second front headphone output, both front headphone outputs are always driven with the same signal. All ports are 3.5mm in diameter
Internal Speaker Amplifier	For the internal speaker only. External speakers must be powered externally. Rear Line-in audio port is re-taskable as either Line-in or Microphone-In.
Multi-streaming Capable	Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks.
Sampling	8 kHz - 192 kHz
Wavetable Syntheses (software)	Yes - Uses OS soft wavetable
Analog Audio	Yes
# of Channels on Line-Out (mono/stereo)	Stereo (Left & Right channels)
Internal Audio Speaker Power Rating	1.5 W
Internal Speaker	Yes
External Speaker Jack (Line-Out)	Yes

HP Thin USB Powered Speakers

On/Off/Volume Controls	Right side of right speaker
Power LED	Front of right speaker (green)
Frequency Response	FO to 20kHz
Watts	2/3 watt (normal/maximum)
Dimensions/Speaker (H x W x D)	5.72 x 3.74 x 0.96 in 14.52 x 9.50 x 2.45 cm
Net Weight	0.68 lbs 0.31kg
Color	Black
Environmental (all conditions non-condensing)	Operating Temperature: 14° to 104°F -10° to 40°C Relative Humidity 40% to 90%
Speaker Cable Length	Input Cord: 5.91 ft 1800mm L-channel Cord: 3.28 ft 1000mm USB Cord: 5.91 ft 1800mm

contents

[Overview](#) [Standard Features and Configurable Components \(availability may vary by country\)](#) [After-Market Options \(availability may vary by region\)](#) [Technical Specifications](#) [Technical Specifications - Audio](#)
[Technical Specifications - Communications](#) [Technical Specifications - Graphics](#) [Technical Specifications – Data Storage Drives](#) [Technical Specifications - Input/Output Devices](#) [Technical Specifications - Removable Storage](#)
[Technical Specifications - Eco Data](#)

Technical Specifications - Communications

Intel 82579LM GbE Network Connection (integrated)

Connector	RJ-45
System Interface	Integrated on PCA
Controller	Intel 82579LM GbE platform LAN connect networking controller
Memory	24 KB FIFO packet buffer memory
Data rates supported	10/100/1000 Mbps
IEEE Compliance	802.1P 802.1Q 802.2 802.3 802.3ab 802.3az 802.3u
Bus architecture	PCI Express and SMBus
Data transfer mode	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state)
Power requirement	Requires 3.3V and 1.05V or just 3.3V with integrated regulators Power consumption 0.697 Watts
Boot ROM support	Yes
Network transfer mode	Full-duplex Half-duplex (not supported for the 1000BASE-T transceiver)
Network transfer rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
Environmental	Operating Temperature: 0° to 85°C Operating Humidity: 60% RH
Management	WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostic.
Alerting	ASF 2.0 support; AMT 7.0 support

Intel Gigabit CT Desktop Network Interface Controller

Connector	RJ-45
System Interface	PCI Express x1
Controller	Intel WG82574L Gigabit Ethernet Controller
Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers
Data rates supported	10/100/1000 Mbps
Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
Bus architecture	PCI-E 1.0a
Data path width	X1, 250 MB/s, Bi-directional interface
Data transfer mode	Bus-master DMA
Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
Power requirement	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
Boot ROM support	Yes
Network Transfer Rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)

Environmental	Operating Temperature: 32° to 131°F (0° to 55°C)
	Operating Humidity: 85% at 131°F (55°C)
Dimensions	4.75 x 2.25 x 0.8 in (12.1 x 5.7 x 2.0 cm)
Management	WOL, PXE, DMI, WFM 2.0

HP 802.11 b/g/n Wireless Network Connection

Dimensions (L x H)	2.8 x 2.2 in (7.0 x 5.7 cm)
Weight	0.08 lbs (40 g)
Controller	Ralink RT2790
System interface	PCI Express x1
Network standard	802.11 b/g/n
Frequency band	2.400 - 2.497 GHz
Operating temperature	14° to 149°F, operating (-10° to 65°C, operating)
Storage temperature	-40° to 176°F, non-operating (-40° to 80°C, non-operating)
Humidity	10-90% operating 5-95% non-operating
Operating voltage	3.3V +/- 9% 12V +/- 8%

Power Consumption	Platform/WLAN Mode	Power Consumption
	Maximum Power Consumption:	10 Watts
	Transmit Only	4 Watts maximum averaged power over 1 second
	Transmit Packet or Active Scanning	1000 mA peak current for 100 microseconds or longer
	Receive Only Mode or Idle without IEEE PSP mode enabled	3 Watts maximum averaged over 1 second
	Idle, with IEEE PSP mode enabled	1.0 Watts maximum averaged over 1 second
	Transmit Disabled (turned off in software)	50 mW maximum, averaged over 1 second
	Platform in S3 or S4 (power removed from Low Profile PCI Express Card)	5 mW maximum, averaged over 1 second
Output Power (approximate)	802.11b mode	+19 dBm +/- 1.0 dB maximum
	802.11g mode	+17 dBm +/- 1.0 dB maximum
	EWC mode	+17 dBm +/- 1.0 dB maximum (total power in all transmit chains)

Receive Sensitivity	Mode	Data Rate	Sensitivity
	802.11b	1 Mbps	-94 dBm
	802.11b	11 Mbps	-85 dBm
	802.11g	6 Mbps	-91 dBm
	802.11g	18 Mbps	-85 dBm
	802.11g	48 Mbps	-75 dBm
	802.11g	54 Mbps	-72 dBm
	EWC (2.4 GHz)	6.5 Mbps	-87 dBm
	EWC (2.4 GHz)	54 Mbps	-82 dBm
	EWC (2.4 GHz)	81 Mbps	-78 dBm
	EWC (2.4 GHz)	162 Mbps	-74 dBm
	EWC (2.4 GHz)	270 Mbps	-68 dBm
	EWC (2.4 GHz)	300 Mbps	-64 dBm

Data Transfer Rate	Data Rate (MCS)	Minimum Throughput
	1 Mbps (802.11 b)	700 kbps
	2 Mbps (802.11 b)	1.4 Mbps
	5.5 Mbps (802.11 b)	3.5 Mbps
	11 Mbps (802.11 b)	5.9 Mbps
	12 Mbps (802.11 g)	6 Mbps
	18 Mbps (802.11 g)	9 Mbps
	24 Mbps (802.11 g)	12 Mbps
	36 Mbps (802.11 g)	18 Mbps
	48 Mbps (802.11 g)	21 Mbps
	54 Mbps (802.11 g)	22.5 Mbps

6.5 Mbps (20 MHz EWC)	4.5 Mbps
13 Mbps (20 MHz EWC)	9 Mbps
19.5 Mbps (20 MHz EWC)	13.5 Mbps
26 Mbps (20 MHz EWC)	18 Mbps
39 Mbps (20 MHz EWC)	27 Mbps
52 Mbps (20 MHz EWC)	36 Mbps
58.5 Mbps (20 MHz EWC)	40 Mbps
65 Mbps (20 MHz EWC)	45 Mbps
78 Mbps (20 MHz EWC)	54 Mbps
104 Mbps (20 MHz EWC)	72 Mbps
117 Mbps (20 MHz EWC)	81 Mbps
130 Mbps (20 MHz EWC)	91 Mbps
13.5 Mbps (40 MHz EWC)	8 Mbps
27 Mbps (40 MHz EWC)	16 Mbps
40.5 Mbps (40 MHz EWC)	24 Mbps
54 Mbps (40 MHz EWC)	32 Mbps
81 Mbps (40 MHz EWC)	48 Mbps
108 Mbps (40 MHz EWC)	64 Mbps
121.5 Mbps (40 MHz EWC)	72 Mbps
135 Mbps (40 MHz EWC)	81 Mbps

Security	IEEE and WiFi compliant 64 / 128 bit WEP encryption AES: CCM 802.1x authentication WPA: 802.1x. WPA-PSK and TKIP WPA2 certification IEEE 802.11i Cisco Certified Extensions, all versions through V5
Antenna	HP part number 497317-003
Certifications	Wi-Fi certified
Certifications for use by country	United States, Canada, Peru, Taiwan

contents

[Overview](#) [Standard Features and Configurable Components \(availability may vary by country\)](#) [After-Market Options \(availability may vary by region\)](#) [Technical Specifications](#) [Technical Specifications - Audio](#)
[Technical Specifications - Communications](#) [Technical Specifications - Graphics](#) [Technical Specifications - Data Storage Drives](#) [Technical Specifications - Input/Output Devices](#) [Technical Specifications - Removable Storage](#)
[Technical Specifications - Eco Data](#)

Technical Specifications - Graphics

Intel HD Graphics (integrated)

3D/2D Controller	Microsoft DirectX 10.1 based with support for Pixel Shader 4.1
VGA Controller	Integrated
DisplayPort	v1.1a; integrated, multimode capable; supports HDCP and audio over DisplayPort
Bus Type	PCI Express™ x16
RAMDAC	Integrated, 350 MHz
Memory	Graphics memory is shared with system memory. Graphics memory usage varies depending on the amount of system memory installed, BIOS settings, operating system, and system load. 32 MB is pre-allocated for graphics use at system boot time. Additional memory can be allocated at boot time by the BIOS for PAVP (Protected Audio Video Playback) support for playback of protected video content. Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.
HW Video Decode	Hardware Accelerated decode for MPEG2 encrypted video; support for PAVP
Maximum Color Depth	32 bits/pixel
Maximum Vertical Refresh Rate	85 Hz at up to 1920x1440, 75 Hz at 2048x1536. Varies with mode and configuration. See table below.

Integrated dual independent monitor support facilitated via one VGA port and one DisplayPort v1.1a integrated on the back plane of the system board and presented as part of the rear I/O set of interfaces. Support for DVI, HDMI, dual link DVI or second VGA monitor provided by optional HP DisplayPort adapters.

Multi-display Support

The system can support greater than two monitors with the addition of an optional discrete graphics card. Both integrated graphics and discrete graphics can be utilized simultaneously.

Graphics/Video API Support

Microsoft DirectX 10.1, OpenGL 3.0

	Resolution	Maximum Refresh Rate	
		Analog Connection	Digital Connection
Resolutions Supported	640x480	85	60
	800x600	85	60
	1024x768	85	60
	1280x720	85	60
	1280x1024	85	60
	1440x900	75	60
	1600x1200	85	60
	1680x1050	75	60
	1920x1080	85	60-R
	1920x1200	85	60-R
	1920x1440	85	N/A
	2048x1536	75	N/A
	2560x1600	N/A	60*

* Only supported when using a DisplayPort connection

NOTE:

Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

NOTE:

60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

NVIDIA Quadro NVS 295 Graphics Card

Form Factor	2.731 inches (H) x 6.6 inches (L), half-height
Graphics Controller	NVIDIA Quadro NVS 295 Graphics Board
Bus Type	PCI Express x16, Generation 2.0
Memory	256 MB GDDR3 SDRAM unified graphics memory
Connectors	(2) DisplayPort outputs Includes (2) DisplayPort to VGA Adapters Note: When purchased as an after-market option, this comes instead with 2 DisplayPort to DVI-D adapters.
Maximum Resolution	Two DisplayPort outputs drive two digital displays up to 2560 x 1600
Display Output	Drives DisplayPort enabled digital displays at resolutions up to 2560 x 1600 at 60 Hz with reduced blanking Drives DVI enabled digital displays at resolutions up to 1920 x 1200 at 60 Hz with reduced blanking (through DisplayPort to DVI-D (single link) cable)
Supported Graphics APIs	OpenGL 3.0 DirectX 10.0

HP DisplayPort to DVI-D Adapter

Connectors	DisplayPort and DVI-D single link connector
Adapter length	7.5 in (19.0 cm)
Adapter weight	.10 lbs (.05 kg)

HP DisplayPort to VGA Adapter

Connectors	DisplayPort and VGA connector
Adapter length	8 in (20 cm)
Adapter weight	.1 lbs (.06 kg)
Max. vertical refresh rate	85 Hz
Display support	162 MHz RAMDAC

Display max resolution 1600x1200

	Resolution	Max refresh rate
	640x480	85
	800x600	85
	1024x768	85
	1280x720	85
	1280x1024	85
	1440x900	75
	1600x1200	60
Resolutions Supported	1680x1050	60
	1920x1080	60-R
	1920x1200	60-R

NOTE:

Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP. Using the HP DisplayPort to VGA Adapter may require an update to the graphics driver installed on your system. To install the most up-to-date graphics driver go to: <http://www.hp.com/>.

NOTE:

60-R denotes reduced blanking timings are used. Not all monitors support reduced blanking timing.

contents

[Overview](#) [Standard Features and Configurable Components \(availability may vary by country\)](#) [After-Market Options \(availability may vary by region\)](#) [Technical Specifications](#) [Technical Specifications - Audio](#) [Technical Specifications - Communications](#) [Technical Specifications - Graphics](#) [Technical Specifications – Data Storage Drives](#) [Technical Specifications - Input/Output Devices](#) [Technical Specifications - Removable Storage](#) [Technical Specifications - Eco Data](#)

Technical Specifications – Data Storage Drives

Introduction:

HP Serial Advanced Technology Attachment (SATA) Hard Drives maximize the performance of HP Business PCs by providing the technologies to meet your increasing storage demands with high-capacity drives offering superior reliability and performance.

SATA provides faster data transfer speeds, better system cooling airflow, more bandwidth, more headroom for speed increases in future generations and better data integrity. A next-generation technology, the SATA interface connects hard drives to the PC platform enabling easy aggregation of multiple hard drives into a single PC. This offers you the additional benefits of dedicated bandwidth, the ability to more easily identify device failures and scalability. The HP Compaq 6200 Pro Series supports the latest SATA 6.0Gb/s specification.

HP Drive Lock

HP Serial ATA Hard Drives offer enhanced security via a new Drive Lock. When enabled, this ATA security feature set prevents software access to user data on the drive until one or two user-defined passwords are provided.

SMART IV Technology

Self Monitoring Analysis and Reporting Technology (SMART) hard drive technology allows hard drives to monitor their own health and to raise flags if imminent failures are predicted. If the drive determines that a failure is imminent, the SMART hard drive technology enables the intelligent manageability or management software to generate a fault alert. While the current versions of SMART hard drives do a good job monitoring the data on the hard drive media, the ever increasing emphasis on reliability and quality has promoted HP to implement SMART IV technology which constantly checks that the data flow from host interface to media and media to host interface is not compromised. This is accomplished by inserting a 2 byte parity code into every 512 byte block in the data path of the hard drive's Cache RAM. This unique parity checking performed by HP's SMART IV technology hard drives, allows for more complete error detection coverage encompassing the entire data path between the host and the hard drive.

Smart IV is also known as IOEDC: I/O Error Detection Code.

Native Command Queuing

NCQ or Native Command Queuing is a SATA protocol extension that allows the hard drive to have several write or read commands outstanding at the same time. In contrast, normal non-queued operation requires each command to be completed

before the next command is issued by the host system. Queuing allows the drive to complete the commands in the order that allows for best overall throughput. It also involves an advanced method of transferring data to or from the host, called First Party Direct Memory Access (FPDMA), which allows the hard drive and the host controller to manage the data transfers for multiple outstanding commands, without involving the host processor. NCQ can contribute to better performance but the results are dependent on many factors, including the access patterns of the various applications and operating system functions that are initiating drive accesses. Enabling NCQ features in the hard drive requires AHCI support from the host system BIOS, controller, and driver. AHCI support is typically implemented in RAID configurations.

NOTE: GB = 1 billion bytes. Actual available capacity is less.

HP 80-GB Solid State Drive

Unformatted Capacity	80-GB
Architecture	Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller
Interface	Serial ATA 2.0 (3.0 Gb/s)
Dimensions (W x H x D)	2.74 x 0.37 x 4 in/6.98 x 0.95 x 10.2 cm
Weight	0.18 lb/80 g
Bandwidth Performance	Sustained Sequential Read: Up to 250 MB/s
	Sustained Sequential Write: Up to 70 MB/s
	Random Read: Up to 35K IOPs
	Random Write: Up to 6.6K IOPs
Latency	Read: 65-ms
	Write: 85-ms
Power	DC power requirement: 5 VDC 5%-100 mV ripple p-p
	Total power consumption: 0.15W (active); 0.075W (idle)
Useful Drive Life	35TB written, up to 20GB/day for 5 years
Environmental (all conditions, non-condensing)	Operating Temperature: 32° to 158°F (0° to 70°C)
	Relative Humidity: 5% to 95%
	Maximum Wet Bulb Temperature (operating): 84°F (29°C)
	Shock: 1,500 G/0.5-ms

NOTE:

For solid state disk drives, GB means 1 billion bytes. 16GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity varies by content and will be less than 15.8GB.

HP 160-GB Solid State Drive

Unformatted Capacity	160-GB
Architecture	Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller
Interface	Serial ATA 2.0 (3.0 Gb/s)
Dimensions (W x H x D)	2.74 x 0.37 x 4 in/6.98 x 0.95 x 10.2 cm
Weight	0.18 lb/80 g
Bandwidth Performance	Sustained Sequential Read: Up to 250 MB/s
	Sustained Sequential Write: Up to 70 MB/s
	Random Read: Up to 35K IOPs
	Random Write: Up to 6.6K IOPs
Latency	Read: 65-ms
	Write: 85-ms
Power	DC power requirement: 5 VDC 5%-100 mV ripple p-p
	Total power consumption: 0.15W (active); 0.075W (idle)
Useful Drive Life	35TB written, up to 20GB/day for 5 years
Environmental (all conditions, non-condensing)	Operating Temperature: 32° to 158°F (0° to 70°C)
	Relative Humidity: 5% to 95%
	Maximum Wet Bulb Temperature (operating): 84°F (29°C)
	Shock: 1,500 G/0.5-ms

NOTE:

For solid state disk drives, GB means 1 billion bytes. 16GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity varies by content and will be less than 15.8GB.

HP 160-GB 7.2K SATA 3.0Gb/s 2.5" Hard Disk Drive

Capacity	160,041,885,696 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 2.0 (3.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	312,581,808
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 12 ms Full-Stroke: 22 ms
Height (nominal)	0.374 in/9.5 mm
Width (nominal)	Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm
Operating Temperature	41° to 131°F (5° to 55°C)

HP 160-GB 10K SATA 3.0Gb/s 2.5" Hard Disk Drive

Capacity	160,041,885,696 bytes
Rotational Speed	10,000 rpm
Interface	Serial ATA 2.0 (3.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	312,581,808
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 12 ms Full-Stroke: 22 ms
Height (nominal)	0.6 in (1.53 cm)
Width (nominal)	Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm
Operating Temperature	41° to 131°F (5° to 55°C)

HP 250-GB 7.2K SATA 3.0Gb/s 2.5" Hard Disk Drive

Capacity	250,059,350,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 2.0 (3.0 Gb/s)
Buffer Size	16MB
Logical Blocks	488,397,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 12 ms Full-Stroke: 22 ms
Height (nominal)	0.374 in/9.5 mm
Width (nominal)	Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm
Operating Temperature	41° to 131°F (5° to 55°C)

HP 250-GB 7.2K SATA 6.0Gb/s 3.5" Hard Disk Drive

Capacity	250,059,350,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	488,397,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 1.0 ms Average: 8.5 ms Full-Stroke: 18 ms
Height (nominal)	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131°F (5° to 55°C)

HP 300-GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive

Capacity	300,069,052,416 bytes
Rotational Speed	10,000 rpm
Interface	Serial ATA 2.0 (3.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	586,072,368
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 0.7 ms
	Average: 4.4 ms
	Full-Stroke: 9.5 ms
Height (nominal)	0.6 in (1.53 cm)
Width (nominal)	Media diameter: 2.5 in (6.36 cm)
	Physical size: 2.75 in (6.99 cm)
Operating Temperature	41° to 131°F (5° to 55°C)

HP 320-GB 7.2K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive

Capacity	320,072,933,376 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 2.0 (3.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	488,397,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms
	Average: 12 ms
	Full-Stroke: 22 ms
Height (nominal)	0.374 in/9.5 mm
Width (nominal)	Media diameter: 2.5 in/63.5 mm
	Physical size: 2.75 in/70 mm
Operating Temperature	41° to 131°F (5° to 55°C)

HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

Capacity	500,107,862,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	976,773,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms
	Average: 11 ms
	Full-Stroke: 21 ms
Height (nominal)	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm
	Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131°F (5° to 55°C)

HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

Capacity	1,000,204,886,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	32 MB
Logical Blocks	1,953,525,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms
	Average: 11 ms
	Full-Stroke: 21 ms
Height (nominal)	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm
	Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131°F (5° to 55°C)

contents

[Overview](#)
 [Standard Features and Configurable Components \(availability may vary by country\)](#)
 [After-Market Options \(availability may vary by region\)](#)
 [Technical Specifications](#)
 [Technical Specifications - Audio](#)

[Technical Specifications - Communications](#)
[Technical Specifications - Graphics](#)
[Technical Specifications - Data Storage Drives](#)
[Technical Specifications - Input/Output Devices](#)
[Technical Specifications - Removable Storage](#)
[Technical Specifications - Eco Data](#)

Technical Specifications - Input/Output Devices

HP USB Standard Keyboard

Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in 45.8 x 16.3 x 2.5 cm
	Weight	2 lb 0.9 kg
Electrical	Operating voltage	+ 5VDC \pm 5%
	Power consumption	50-mA maximum (with three LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
Mechanical	Microsoft® PC 99 - 2001	Functionally compliant
	Languages	38 available
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
Environmental	Operating temperature	50° to 122°F (10° to 50°C)
	Non-operating temperature	-22° to 140°F (-30° to 60°C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
Approvals	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	ANSI HFS 100, ISO 9241-4, and TUVGS	
Ergonomic compliance		
Kit contents	Keyboard	Installation Guide
	Warranty Card	Safety and Comfort Guide

HP PS/2 Standard Keyboard

Physical Characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Dimensions	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)

	(L x W x H)	
Electrical	Weight	2 lb (0.9 kg) minimum
	Operating voltage	+ 5VDC \pm 5%
	Power consumption	50-mA maximum (with three LEDs ON)
	System interface	PS/2 6-pin mini din connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
Mechanical	Languages	38 available
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft 1.8 m
Environmental	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122°F (10° to 50°C)
	Non-operating temperature	-22° to 140°F (-30° to 60°C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

HP USB Smart Card (CCID) Keyboard

Introduction:

Boost your security, simplify access procedures and reduce the costs associated with managing networks by preventing unauthorized access to your computers and networks using smartcard technology with the HP Smart Card (CCID) Keyboard.

The USB Smart Card (CCID) Keyboard is a full-sized keyboard that takes advantage of digital signatures and certificates to secure the environment for transactions performed on both public and private networks. The USB Smart Card (CCID) Keyboard works with all smart cards that comply with ISO standard 7816.

Smart cards are easy-to-use credit card-sized devices which require multiple forms of information to be validated before you gain access to your accounts or resources. Used worldwide, smart cards strengthen access to a network or other resource using dual-factor authentication. Implementing a two-factor authentication (or multi-factor authentication) process reduces the risk of unauthorized access by verifying and validating your identity in one of the following ways:

- Something you know - a combination of username and password or PIN
- Something you have - a smart card or security token.

Something you have (smart card) plus something you know (PIN), improves user-access security within corporate network environments. Smart cards are used in government agencies, healthcare companies and the finance industry.

HP ProtectTools Smart Card Manager provides authentication software for the smart card. The Smart Card Reader module works with the HP ProtectTools Security Manager and enables the user to setup, use, and manage the smart card. This allows strengthened security with HP patented technology.

Key Benefits:

- Protects against unauthorized access with smart card technology
- Delivers even greater security when combined with a HP ProtectTools smart card and the HP ProtectTools Security Software
- Combination of username and password or pin with a smart card or security token
- Secures online transactions using digital signatures and certificates
- Conforms to industry standards for ease of setup and use
- Delivers long product life and quiet operation with high-impact materials and lubricated keys
- Spill drain feature

Physical Characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)	
	Form factor	USB basic smart card keyboard	
	Colors	Carbonite/Silver	
	Dimensions (H x W x D)	18.2 x 6.3 x 1.3 in 46.3 x 16.1 x 3.3 cm	
Electrical	Weight	2 lb (0.9 kg) minimum	
	Operating voltage	+ 5VDC \pm 5%	
	Power consumption	100-mA maximum (with four LEDs ON)	
	System interface	USB Type A plug connector	
Mechanical	ESD	CE level 4, 15-kV air discharge	
	EMI - RFI	Conforms to FCC rules for a Class B computing device	
	Microsoft PC 99 - 2001	Functionally compliant	
	Languages	30+ available	
Environmental	Keycaps	Standard design	
	Switch actuation	55 g nominal peak force with tactile feedback	
	Switch life	20 million keystrokes (using Hasco modified tester)	
	Switch type	Contamination-resistant membrane	
SmartCard Function	Key-leveling mechanisms	For all double-wide and greater-length keys	
	Cable length	6 ft (1.8 m)	
	Microsoft PC 99 - 2001	Mechanically compliant	
	Acoustics	43-dBA maximum sound pressure level	
Environmental	Operating temperature	50° to 122°F (10° to 50°C)	
	Non-operating temperature	-22° to 140°F (-30° to 60°C)	
	Operating humidity	10% to 90% (non-condensing at ambient)	
	Non-operating humidity	20% to 80% (non-condensing at ambient)	
SmartCard Function	Operating shock	40 g, six surfaces	
	Non-operating shock	80 g, six surfaces	
	Operating vibration	2-g peak acceleration	
	Non-operating vibration	4-g peak acceleration	
SmartCard Function	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence	
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence	
	Support	All ISO 7816 smart cards	
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)	
SmartCard Function	Chipset	SCM STCIII	
	Standard APIs supported	PC/SC, EMV2000, CT-API	
	Power	USB Port	
		Short circuit detection (protects smart card and reader)	
SmartCard Function		Power supply compliant with ISO7816 and EMV (5V, 60 mA)	
		Supports 3-V and 5-V cards	
	Power consumption	100-mA maximum draw	
	Communication	From card	9600 bps to 330,000 bps
SmartCard Function		From computer	12 Mbps (USB transfer speed)
	Landing mechanism	Contact device	Friction contact
		Card insertions rating	Up to 100,000 insertion

			cycles
	Interface modes	CCID protocol	
	Reader performance interface	USB connection	
	Electro-magnetic standards	Europe	2004/108/EC
		USA	USAFCC part 15
Approvals	CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, EMV2000, USB-IF		
Ergonomic Compliance	ISO 9241-4, TUVGS		
Kit Contents	Keyboard, I/O Security and Documentation CD, warranty card		
Smart Card Compatibility	HP	HP ProtectTools Smart Card	
	American Express	Amex Blue	
	Axalto (Schlumberger)	Cryptoflex 8K	
		Cryptoflex 16K	
		Cryptoflex 32K	
		Cryptoflex 32K e-gate	
		Cyberflex Access 64K	
		Cyberflex Access 32K	
		Cyberflex 32K e-gate	
		Cyberflex 64K	
		Cyberflex Palmera	
		Payflex-S	
		Payflex 1K	
		Payflex 2K	
		Payflex 4K	
		Payflex 8K	
		Prismera	
		US DoD CAC	
		PrimeFlex Store 8K	
		PrimeFlex Store 2K	
	Cardlogix	CLXSU004KK4	
		CLXSU008KK5	
	Safenet, Inc.	Model 300	
		Model 330	
	De-La Rue	VisaCash	
	Gemplus	Gem Expresso	
		GKK32K	
		Gemclub Memo	
		GemClub Micro	
		GemXplore	
		GemSafe	
	Infineon	SLE66C322P	
		SLE4406	
		SLE4406E	
		SLE4406E SE	
		SLE4418	
		SLE4428	
		SLE4432	
		SLE4436E	
		SLE4442	
		SLE5536	
	SafLink (Litronic)	Forte	
	Shart	Java Card	
	Oberthur	CosmopolIIC v4	
		CosmopolIIC v4.1	
		Cosmo ID-One	
		GalatIIC v2.1	
		US DoD CAC	
	Memory Cards		
	Atmel	AT24C01ASC	
		AT24C02SC	
		AT24C04SC	
		AT24C08SC	
		AT24C16SC	
		AT24C32SC	
		AT24C64SC	
		AT24C128SC	
		AT24C256SC	
		AT24C512SC	

	AT88SC153
	AT88SC1608
ISSI	IS23SC4418
	IS23SC4428
ST	14C02
Telefonkarte	SLE4406
	SLE4436
	SLE5536
XICOR	X24026

HP USB & PS2 Washable Keyboard

Physical Characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in 45.8 x 16.3 x 2.5 cm
	Weight	2 lb (0.9 kg) minimum
Electrical	Operating voltage	+ 5VDC \pm 5%
	Power consumption	50-mA maximum (with three LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
Mechanical	Microsoft® PC 99 - 2001	Functionally compliant
	Keycaps	Stepped -profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	7 ft 2.2 m
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122°F 10° to 50°C
Environmental	Non-operating temperature	-4° to 149°F -20° to 65°C
	Operating humidity	10% to 95% (non-condensing at ambient)
	Non-operating humidity	0% to 95% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Approvals	UL, cUL, FCC, CE, TUV GS, VCCI, BSMI, C-Tick, KCC, USB-IF, WHQL, EN/IEC 60601-1, IP66/NEMA4X
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

HP PS/2 Optical Mouse

Dimensions (H x L x W)	1.56 x 2.44 x 4.61 in
	3.95 x 6.21 x 11.7 cm

Weight	4.44 oz 126 g
Environmental	Operating temperature -32° to 104°F 0° to 40°C Non-operating temperature -4° to 140°F -20° to 60°C Operating humidity 10% to 90% (non condensing at ambient) Non-operating humidity 10% to 90% (non condensing at ambient) Operating shock 40 g, 6 surfaces Non-operating shock 80 g, 6 surfaces Operating vibration 2 g peak acceleration Non-operating vibration 4 g peak acceleration Drop (out of box) 80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
Electrical	Operating voltage 5 VDC \pm 10% Power consumption 100mA System consumption PS/2 mini-din connector ESD CE level 4, 15 kV air discharge EMI-RFI Conforms to FCC rules for a Class B computing device Microsoft PC99 - 2001 Functionally compliant
Mechanical	Resolution 400 \pm 20% DPI Tracking speed 10 in/s (25.4 cm/s) maximum Acceleration 100 in/s/s (2.54 m/s/s) Switch actuation 61 g nominal peak force Switch life 3,000,000 operations (using Hasco modified tester) Switch type Low force micro-switches Tracking mechanism life 155 mi (250 km) at average speed of 10 in/s Cable length 6 ft (1.8 m) Microsoft PC99 - 2001 Mechanically compliant
Scroll wheel	Width 8 mm Diameter 1.01 in (25.6 mm) Maximum rotation speed 48 rats/sec Switch type Light force micro-switch Switch life 1 million operations Mechanical life Minimum 200,000 revolutions
Regulatory Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC

HP USB Optical Mouse

Dimensions (H x L x W)	1.5 x 4.5 x 2.5 in 3.8 x 11.6 x 6.3 cm
Weight	0.27 lb 0.12 kg
Cable length	72.8 in 185 cm
System requirements	Microsoft Windows 95, 98, 2000, Me, XP and Vista Available USB port

HP USB Laser Mouse

Scroll Wheel	24
Maximum Rotation Speed	48 rats/sec
Switch Type	Wheel
Switch Life	Button – 3,000,000 Wheel – 1,000,000 times Tilt switch – 500,000 times
Environmental	Operating Temperature 32° to 104° F 0° to 40° C Non-operating Temperature -4° to 140° F -20° to 60° C Operating Humidity 10% to 90% (non-condensing at ambient) Non-operating Humidity 20% to 80% (non-condensing at ambient) Operating Shock 40 g, six surfaces Non-operating Shock 80 g, six surfaces Operating Vibration 2-g peak acceleration Non-operating Vibration 4-g peak acceleration
Electrical	Operating Voltage + 5VDC ± 5% Power Consumption MTBF > 150,000 hrs ESD IEC-61000-4-2 criteria B, Contact discharge: +/- 4kV, Air discharge: +/- 8kV EMI-RFI FCC Class B PC98 PC 99 Compliant
Mechanical	Resolution 800dpi Tracking Speed 25 cm/sec Acceleration 0.5mm Switch Actuation 0.6N (60gf) Switch Life Button - 3,000,000 Wheel - 1,000,000 times Tilt switch - 500,000 times Cable Length 1850mm PC98-99 PC99 compliant
Regulatory Approvals	UL60950-1, UL 94, UL 746 (A-E), UL 796 TUV/GS: EN 60950-1, EN 60825-1 FCC Class B, UL 1950, cUL, TUV GS, CE, C-tick, VCCI, BSMI, RRL

contents

[Overview](#) [Standard Features and Configurable Components \(availability may vary by country\)](#) [After-Market Options \(availability may vary by region\)](#) [Technical Specifications](#) [Technical Specifications - Audio](#)
[Technical Specifications - Communications](#) [Technical Specifications - Graphics](#) [Technical Specifications – Data Storage Drives](#) [Technical Specifications - Input/Output Devices](#) [Technical Specifications - Removable Storage](#)
[Technical Specifications - Eco Data](#)

Technical Specifications - Removable Storage

HP Blu-ray Writer Drive

AMO Part Number	AR482AA	
Height	5.25-inch, half-height, tray-load	
Orientation	Either horizontal or vertical	
Interface type	SATA	
Disc capacity	50 GB DL or 25 GB standard	
Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 19.0 cm)	
Weight (max)	2.0 lb (907 g)	
Disc Capacity	DVD-ROM	8.5GB DL or 4.7GB standard
	Blu-ray	50GB DL or 25GB standard
	Full Stroke DVD	< 250 ms (seek)
	Full Stroke CD	< 210 ms (seek)
	Blu-ray	< 275 ms (seek)
	(Time to drive ready from tray loading)	
	BD-ROM (SL/DL)	25S / 28S
	BD-R (SL/DL)	25S / 28S
	BD-RE (SL/DL)	25S / 28S
	DVD-ROM (SL/DL)	18S / 18S
	Startup Time	
	DVD-R (SL/DL)	25S / 25S
	DVD-RW	25S
	DVD+R (SL/DL)	25S / 25S
	DVD+RW	DVD+RW 25S
	DVD-RAM	45S
	CD-ROM	15S
	CD-ROM Read	
	CD-ROM up to 40X	
	CD-R up to 40X	
	CD-RW up to 40X	
	DVD-ROM Read	
	DVD-RAM up to 5X	
	DVD+RW up to 10X	
	DVD-RW up to 10X	
	DVD+R DL up to 8X	
	DVD-R DL up to 8X	
Maximum Data Transfer Rates	DVD-ROM up to 16X	
	DVD-ROM DL up to 8X	
	DVD+R up to 12X	
	DVD-R up to 12X	
	Blu-ray	
	BD-ROM up to 6X	
	BD-ROM DL up to 4.8X	
	BD-R up to 6X	
	BD-R DL up to 4.8X	
	BD-R up to 6X	
Power	Source	BD-RE SL/DL up to 4.8X
		SATA DC power receptacle

Environmental (all conditions non-condensing)	DC Power Requirement	5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p
	DC Current	5 VDC -1000 mA typical, 1600 mA maximum 12 VDC -600 mA typical, 1400 mA maximum
	Temperature (operating)	41° to 122°F (5° to 50°C)
	Relative Humidity (operating)	10% to 90%
	Maximum Wet Bulb Temperature (operating)	86°F (30°C)

HP SuperMulti DVD Writer Drive

AMO Part Number	AR630AT		
Height	5.25-inch, half-height, tray-load		
Orientation	Either horizontal or vertical		
Interface type	Serial ATA		
Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)		
Weight (max)	2.6 lb (1.2 kg)		
Performance	CD Media Read Access	Random	< 120 ms typical
		Full Stroke	< 200 ms typical
	DVD Media Read Access	Random	< 130 ms typical
		Full Stroke	< 240 ms typical
	CD Media Read Transfer	CD-ROM, CD-R Read	Up to 6000 KB/s (40X)
		CD-RW Read	Up to 4800 KB/s (32X)
		Digital/Analog Audio Playback	Up to 2400 KB/s (16X)
		Digital Audio Extraction (CD-ROM, CD-R)	Up to 6000 KB/s (40X)
		Digital Audio Extraction (CD-RW)	Up to 4800 KB/s (32X)
		Video CD Playback	Up to 2400 KB/s (16X)
		DVD-ROM SL Read	Up to 21600 KB/s (16X)
		DVD-ROM DL Read	Up to 10800 KB/s (8X)
		DVD Video Playback	Up to 10800 KB/s (8X)
		DVD Video SL (other than playback)	Up to 21600 KB/s (16X)
	DVD Media Read Transfer	DVD Video DL (other than playback)	Up to 10800 KB/s (8X)
		DVD-R	Up to 21600 KB/s (16X)
		DVD+R	Up to 21600 KB/s (16X)
		DVD-RW	Up to 10800 KB/s (8X)
		DVD-R DL	Up to 10800 KB/s (8X)
	CD Media Write Transfer	DVD+RW	Up to 10800 KB/s (8X)
		CD-R Write	Up to 6000 KB/s (40X)
		CD-RW	600 KB/s (4X)
		CD-RW (High speed)	1500 KB/s (10X)
		CD-RW (Ultra speed)	Up to 3600 KB/s (24X)
		CD-RW (Ultra speed+)	Up to 4800 KB/s (32X)
		DVD+R	Up to 21600 KB/s (16X)
		DVD+R DL (v1.2)	Up to 16200 KB/s (12X)
		DVD+R DL (v1.1)	Up to 10800 KB/s (8X)
		DVD+RW (Volume 2 v1.0)	Up to 10800 KB/s (8X)
		DVD+RW (Volume 1 v1.3)	Up to 5400 KB/s (4X)
	DVD Media Write Transfer	DVD-R (v2.1 rev. 6.0)	Up to 16200 KB/s (12X)
		DVD-R (v2.1 rev. 4.0)	Up to 21600 KB/s (16X)
		DVD-R DL (v3.0 rev. 5.0)	Up to 10800 KB/s (8X)
		DVD-R DL (v3.0 rev. 3.0)	Up to 10800 KB/s (8X)
		DVD-RW (v1.2 rev. 3.0)	8100 KB/s (6X)
		DVD-RW (v1.2 rev. 2.0)	Up to 5400 KB/s (4X)

Media Compatibility	Media	DVD-RAM (v2.2 rev. 5.0)	Up to 16200 KB/s (12X)
		DVD-RAM (v2.2 rev. 2.0)	Up to 6750 KB/s (5X)
		Read	Write
		CD-ROM	No
		CD-R	No
		CD-RW	No
		DVD-ROM	No
		DVD-ROM DL	No
		DVD-RAM	No
		DVD+R	No
		DVD+R DL	No
		DVD+RW	No
		DVD-R	No
		DVD-RW	No
		DVD-R DL	No
Power Supply	Source	SATA DC power receptacle	
	DC Power Requirement	5 VDC ± 5%	100 mV ripple p-p
		12 VDC ± 5%	200 mV ripple p-p
	DC Current	5 VDC	<1000 mA (typical) 1600 mA (max.)
		12 VDC	1200 mA (typical) 2000 mA (max.)
Rear Panel	Total Drive Power (Standby Mode)		< 2.5W
	SATA Power Connector, 15-pin		
	SATA Data Connector, 7-pin		
Environmental conditions (all conditions non-condensing)	Markings to identify each connector		
	Temperature (operating)	41° to 122°F (5° to 50°C)	
	Temperature (storage)	–22°F to 140°F (–30°C to 60°C)	
	Relative Humidity	10% to 90%	
	Maximum Wet Bulb Temperature	86°F (30°C)	
	Altitude	0 to 10,171 ft. (0 to 3,100 meters)	

HP DVD-ROM Drive

AMO Part Number	AR629AA		
Height	5.25-inch, half-height, tray-load		
Orientation	Either horizontal or vertical		
Interface type	Serial ATA		
Dimensions (W x H x D)	5.8 x 1.7 x 6.9 in (14.8 x 4.2 x 17.5 cm)		
Weight (max)	2.1 lb (950 kg)		
Performance	CD Media Read Access	Random	< 120 ms typical
		Full Stroke	< 200 ms typical
	DVD Media Read Access	Random	< 130 ms typical
		Full Stroke	< 240 ms typical
	CD Media Read Transfer	CD-ROM, CD-R Read	Up to 6000 KB/s (40X)
		CD-RW Read	Up to 4800 KB/s (32X)
		Digital/Analog Audio Playback	Up to 2400 KB/s (16X)
		Digital Audio Extraction (CD-ROM, CD-R)	Up to 6000 KB/s (40X)
		Digital Audio Extraction (CD-RW)	Up to 4800 KB/s (32X)
		Video CD Playback	Up to 2400 KB/s (16X)
		DVD-ROM SL Read	Up to 21600 KB/s (16X)
		DVD-ROM DL Read	Up to 10800 KB/s (8X)
	DVD Video Playback	DVD Video Playback	Up to 10800 KB/s (8X)
		DVD Video SL	

		(other than playback)	Up to 21600 KB/s (16X)
		DVD Video DL (other than playback)	Up to 10800 KB/s (8X)
	DVD Media Read Transfer	DVD-R	Up to 21600 KB/s (16X)
		DVD+R	Up to 21600 KB/s (16X)
		DVD-RW	Up to 10800 KB/s (8X)
		DVD-R DL	Up to 10800 KB/s (8X)
		DVD+RW	Up to 10800 KB/s (8X)
	Media	Read	Write
	CD-ROM	Yes	No
	CD-R	Yes	No
	CD-RW	Yes	No
	DVD-ROM	Yes	No
	DVD-ROM DL	Yes	No
Media Compatibility	DVD-RAM	Yes	No
	DVD+R	Yes	No
	DVD+R DL	Yes	No
	DVD+RW	Yes	No
	DVD-R	Yes	No
	DVD-RW	Yes	No
	DVD-R DL	Yes	No
	Source	SATA DC power receptacle	
	DC Power Requirement	5 VDC \pm 5%	100 mV ripple p-p
		12 VDC \pm 5%	200 mV ripple p-p
Power Supply		5 VDC	<1000 mA (typical) 1600 mA (max.)
	DC Current	12 VDC	1200 mA (typical) 2000 mA (max.)
		Total Drive Power (Standby Mode)	< 2.5W
Rear Panel	SATA Power Connector, 15-pin		
	SATA Data Connector, 7-pin		
	Markings to identify each connector		
	Temperature (operating)	41° to 122°F (5° to 50°C)	
Environmental conditions (all conditions non-condensing)	Temperature (storage)	–22°F to 140°F (–30°C to 60°C)	
	Relative Humidity	10% to 90%	
	Maximum Wet Bulb Temperature	86°F (30°C)	
	Altitude	0 to 10,171 ft. (0 to 3,100 meters)	

HP 22-n-1 Media Card Reader

	USB 2.0 High-speed interface
USB Interface	NOTE: Requires the USB cable to be connected to the internal USB 2.0 port or a USB 2.0 PCI card.
	Supports hardware ECC (Error Correction Code) function
	Supports hardware CRC (Cyclic Redundancy Check) function
	Supports MS 4-bit parallel transfer mode
	Supports MS-PRO 4-bit parallel transfer mode
Advance protocol support	Supports MS PRO-HG Duo 4-bit parallel transfer mode
	Supports SD 4-bit parallel transfer mode
	Supports high-speed 50Mhz SD 4-bit card (version 2.0)
	Supports high-speed 52Mhz MMC 8-bit card (version 4.2)
	Supports CF v4.0 with PIO mode 6 and Ultra DMA mode

	CompactFlash Type I
	CompactFlash Type II
	Microdrive
	MultiMediaCard (MMC)
	Reduced Size MultiMediaCard (RS MMC)
	MultiMediaCard 4.2 (MMC Plus, including MMC Plus HC)
	Reduced Size MultiMediaCard 4.2 (MMC Mobile, including MMC Mobile HC)
	Secure Digital Card (SD)
	Secure Digital High Capacity (SDHC)
	miniSD
	miniSD High Capacity
Supported media type	Micro SD (T-Flash)
	Micro SD HC
	Memory Stick
	Memory Stick Select
	Memory Stick Duo (MS Duo)
	Memory Stick PRO (MS PRO)
	Memory Stick PRO Duo (MS PRO Duo)
	Memory Stick PRO-HG Duo
	MagicGate Memory Stick (MG)
	MagicGate Memory Stick Duo
	xD-Picture Card
Supported media type with card adapter	Memory Stick Micro (M2)
	MMC Micro

contents

[Overview](#) [Standard Features and Configurable Components \(availability may vary by country\)](#) [After-Market Options \(availability may vary by region\)](#) [Technical Specifications](#) [Technical Specifications - Audio](#)
[Technical Specifications - Communications](#) [Technical Specifications - Graphics](#) [Technical Specifications – Data Storage Drives](#) [Technical Specifications - Input/Output Devices](#) [Technical Specifications - Removable Storage](#)
[Technical Specifications - Eco Data](#)

Technical Specifications - Eco Data

Eco-Label Certifications & declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US ENERGY STAR ®
- IT ECO declaration
- EPEAT Gold where HP registers commercial desktop products. See <http://www.epeat.net/> for registration status in your country

Small Form Factor

Energy Consumption (typically configured)	115 VAC	230 VAC	100 VAC
Normal Operation	30.9181 W	31.1382 W	30.9441 W
Sleep (Energy Star low power mode)	2.0709 W	2.2871 W	2.0928 W
Off	0.8967 W	1.0717 W	0.8803 W

Energy efficiency information represents a typically configured product base model meeting ENERGY STAR® specifications if offered within the model family. If optional components or modules are added, like extra hard disks or graphic cards etc, these can change the energy efficiency data listed above.

Heat Dissipation (typically configured)*	115 VAC	230 VAC	100 VAC
--	---------	---------	---------

Normal Operation	106 BTU/hr	106 BTU/hr	106 BTU/hr
Sleep	7 BTU/hr	7 BTU/hr	7 BTU/hr
Off	3 BTU/hr	3 BTU/hr	3 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions

(in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.8	28
Fixed Disk (random writes)	3.8	28

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight:

Battery Size

CR2032 (coin cell)

Battery type

Li-Ion

Additional Information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net/> for registration status in your country.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0.04% post consumer recycled plastic (by wt.)

This product is 93.8% recyclable when properly disposed of at end of life.

Packaging Materials

External	Corrugated - 1966 g
Internal	Polyethylene low density foam - 154 g

The corrugated packaging material contains at least 38.38% recycled content.
The Polyethylene low density Foam packaging material contains at least 60.42% recycled content.

Microtower

Energy Consumption (typically configured)	115 VAC	230 VAC	100 VAC
Normal Operation	31.8271 W	32.8944 W	31.7856 W
Sleep (Energy Star low power mode)	2.0348 W	2.2596 W	2.0193 W
Off	0.8515 W	1.0293 W	0.8358 W

Energy efficiency information represents a typically configured product base model meeting ENERGY STAR® specifications if offered within the model family. If optional components or modules are added, like extra hard disks or graphic cards etc, these can change the energy efficiency data listed above.

Heat Dissipation (typically configured)*	115 VAC	230 VAC	100 VAC
Normal Operation	109 BTU/hr	112 BTU/hr	109 BTU/hr
Sleep	7 BTU/hr	8 BTU/hr	7 BTU/hr
Off	3 BTU/hr	4 BTU/hr	3 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions

(in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.9	29
Fixed Disk (random writes)	3.9	29

Batteries This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight:

Battery Size CR2032 (coin cell)

Battery type Li-Ion

Additional Information This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net/> for registration status in your country.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0.13% post consumer recycled plastic (by wt.)

This product is 92.4% recyclable when properly disposed of at end of life.

Packaging Materials	External	Corrugated Carton - 1950 g
	Internal	Polyethylene low density foam - 205 g
	The corrugated packaging material contains at least 31.38% recycled content.	
	The Polyethylene low density Foam packaging material contains at least 60.42% recycled content.	

All Models

Reduction in Hazardous Substances (RoHS) Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at:

http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

Material Usage

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries

- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
- Nickel finishes that release greater than 0.5 micro-grams/cm²/week, measured according to EN 1811:1998, are not used on any product surface designed to be frequently handled or touched by users.

HP follows these guidelines to decrease the environmental impact of product packaging:

Packaging

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

End-of-life Management and Recycling

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

For more information about HP's commitment to the environment:
Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Hewlett-Packard Corporate Environmental Information

Copyright © 2011 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows 7, and Windows Vista are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, Core 2 Quad, Core 2 Duo, Pentium and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

DA-13880 5 - Version 5 - April 11, 2011