


Overview

HP ProDesk 600 G1 Small Form Factor Business PC

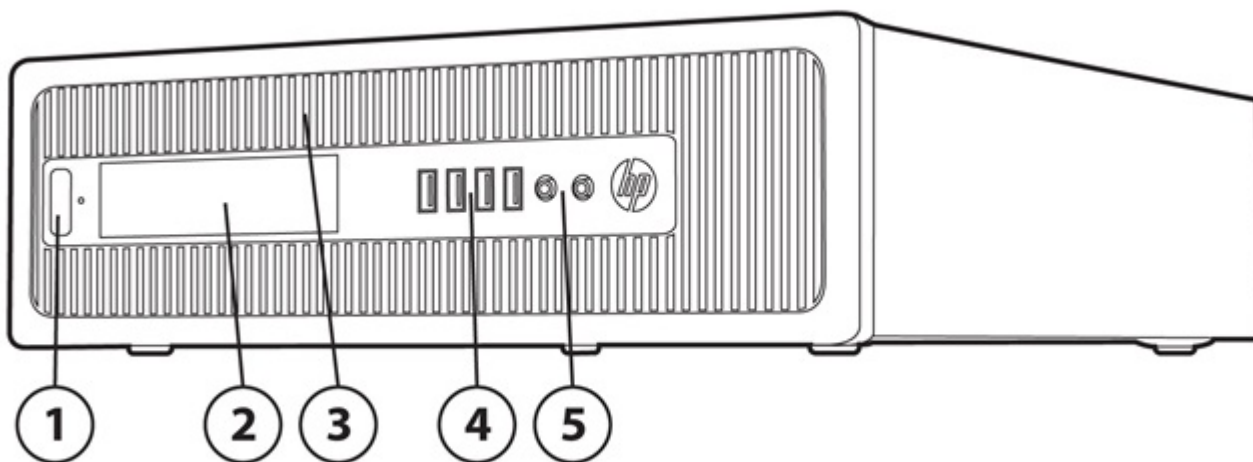


1. Power button and PC status LED
2. 3.5" external drive bay; used for installing a Media Card Reader or 2nd data storage drive
3. Slim drive bay supporting an optical disk drive (located behind removable bezel)
4. (2) USB 3.0 ports, (2) USB 2.0 ports
5. 3.5mm headphone output and microphone jack

Not Shown

| | |
|----------|---|
| Slots | (1) PCI Express x16 graphics connector (3) PCI Express x1 accessory connectors |
| Bays | (1) 2.5" internal storage drive bay (1) 3.5" internal storage drive bay |
| Rear I/O | (2) USB 3.0 ports; (4) USB 2.0 ports (1) VGA video port; (2) DisplayPort with multi-stream video ports (1) RJ-45 network connector (1) RS-232 serial port 3.5mm audio in/out jacks PS/2 keyboard and mouse ports |

Overview

HP ProDesk 600 G1 Tower Business PC

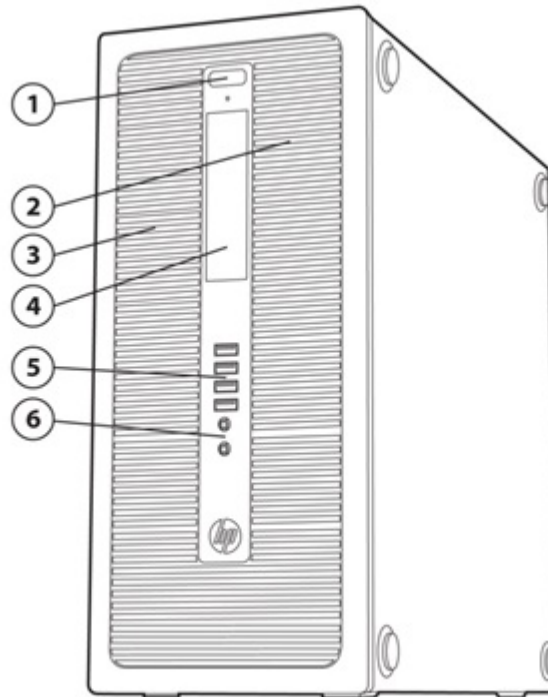

1. Power button and PC status LED
2. Slim drive bay supporting an optical disk drive (located behind removable bezel)
3. 5.25" half height external drive bay (located behind removable bezel)
4. 3.5" external drive bay; used for installing a Media Card Reader
5. (2) USB 3.0 ports, (2) USB 2.0 ports
6. 3.5mm headphone output and microphone jack

Not Shown

- | | |
|----------|---|
| Slots | (1) PCI Express x16 graphics connector (3) PCI Express x1 accessory connector |
| Bays | (1) 2.5" internal storage drive bay (2) 3.5" internal storage drive bay |
| Rear I/O | (2) USB 3.0 ports; (4) USB 2.0 ports (1) VGA video port; (2) DisplayPort with multi-stream video ports (1) RJ-45 network connector (1) RS-232 serial port 3.5mm audio in/out jacks PS/2 keyboard and mouse ports |

Overview

At A Glance

- Choice of Small Form Factor or Tower chassis options
- PC chassis and all internal components and modules are manufactured with low halogen content
- HP developed and engineered UEFI BIOS supporting security, manageability and software image stability
- Intel® Q85 chipset supporting Intel 4th generation Core processors, featuring integrated Intel HD Graphics and Intel® Standard Manageability Technology
- Intel® Ethernet Connection I217L GbE LOM integrated network connection
- DDR3 Synchronous Dynamic Random Access Memory (SDRAM)
- Multi-independent monitor support via VGA and dual digital DisplayPort video interfaces with multi-stream
- Discrete graphics options available
- DTS+ Sound audio management software
- Standard and high efficiency energy saving power supply options
- ENERGY STAR qualified models certified EPEAT Gold
- Guaranteed lengthy purchase lifecycles and image stability

Standard Features and Configurable Components (availability may vary by country)

OPERATING SYSTEM

Preinstalled When Purchased

Windows 8 Pro (64-bit)*
 Windows 8 (64-bit)*
 Windows 7 Ultimate (32-bit)** (LAR only)
 Windows 7 Ultimate (64-bit)**
 Windows 7 Professional (32-bit)**
 Windows 7 Professional (64-bit)**
 Windows 7 Professional (32-bit) (available through downgrade rights from Windows 8 Pro)***
 Windows 7 Professional (64-bit) (available through downgrade rights from Windows 8 Pro)***
 Windows 7 Home Premium (32-bit)** (LAR only)
 Windows 7 Home Premium (64-bit)**

FreeDOS 2.0
 Novell SUSE Linux Enterprise Desktop 11

*Not all features are available in all editions of Windows 8. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8 functionality. See <http://www.microsoft.com>.

**Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

***This system is preinstalled with Windows 7 Pro software and also comes with a license and media for Windows 8 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

CHIPSET

Intel® Q85 Express

SFF/TWR
X

PROCESSOR

Intel® 4th Generation Core™ i7 Processors

Intel® Core™ i7-4770 Processor
 Up to 3.9 GHz Max. Turbo Frequency (3.4 GHz base frequency)
 8 MB cache, 4 cores, 8 threads
 Intel HD Graphics 4600
 Supports DDR3 memory up to 1600 MT/s data rate
 Supports Intel® Stable Image Platform Program (SIPP)

SFF/TWR
X

Standard Features and Configurable Components (availability may vary by country)

| | |
|--|----------|
| <u>Intel Core i7-4771 Processor</u> Up to 3.9 GHz Max. Turbo Frequency (3.5 GHz base frequency) 8 MB cache, 4 cores, 8 threads Intel HD Graphics 4600 Supports DDR3 memory up to 1600 MT/s data rate Supports Intel® vPro™ Technology and Intel® Stable Image Platform Program (SIPP) | X |
| Intel® 4th Generation Core™ i5 Processors | |
| <u>Intel® Core™ i5-4570 Processor</u> Up to 3.6 GHz Max. Turbo Frequency (3.2 GHz base frequency) 6 MB cache, 4 cores, 4 threads Intel HD Graphics 4600 Supports DDR3 memory up to 1600 MT/s data rate Supports Intel® Stable Image Platform Program (SIPP) | X |
| <u>Intel® Core™ i5-4670 Processor</u> Up to 3.8 GHz Max. Turbo Frequency (3.4 GHz base frequency) 6 MB cache, 4 cores, 4 threads Intel HD Graphics 4600 Supports DDR3 memory up to 1600 MT/s data rate Supports Intel® Stable Image Platform Program (SIPP) | X |
| Intel® 4th Generation Core™ i3 Processors | |
| <u>Intel® Core™ i3-4130 Processor</u> Up to 3.4 GHz base frequency 3 MB cache, 2 cores, 4 threads Intel HD Graphics 4400 Supports DDR3 memory up to 1600 MT/s data rate | X |
| <u>Intel® Core™ i3-4330 Processor</u> Up to 3.5 GHz base frequency 4 MB cache, 2 cores, 4 threads Intel HD Graphics 4600 Supports DDR3 memory up to 1600 MT/s data rate | X |
| <u>Intel® Core™ i3-4340 Processor</u> Up to 3.6 GHz base frequency 4 MB cache, 2 cores, 4 threads Intel HD Graphics 4600 Supports DDR3 memory up to 1600 MT/s data rate | X |
| Intel® Pentium Processors | |
| <u>Intel® Pentium G3220 Processor</u> Up to 3.0 GHz base frequency 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1333 MT/s data rate | X |
| <u>Intel® Pentium G3420 Processor</u> Up to 3.2 GHz base frequency 3 MB cache, 2 cores, 2 threads Intel HD Graphics Supports DDR3 memory up to 1600 MT/s data rate | X |

Standard Features and Configurable Components (availability may vary by country)

| | |
|--|----------|
| <u>Intel® Pentium G3430 Processor</u> | X |
| Up to 3.3 GHz base frequency | |
| 3 MB cache, 2 cores, 2 threads | |
| Intel HD Graphics | |
| Supports DDR3 memory up to 1600 MT/s data rate | |

GRAPHICS

| | SFF/TWR |
|--|-----------------|
| Intel HD Graphics on all models (integrated on processor) | X |
| Optional Discrete Graphics Solutions | |
| AMD Radeon HD 8350 (1GB) PCIe x16 | X |
| NVIDIA NVS 310 (512 MB) PCIe x16 | X |
| NVIDIA NVS 315 (1GB) PCIe x 16 | X |
| NVIDIA GeForce GT630 (2 GB) FH PCIe x16 | TWR only |
| Adapters and Cables | |
| HP DMS-59 to Dual DisplayPort Cable | X |
| HP DMS-59 to Dual DVI Cable | X |
| HP DMS-59 to Dual VGA Cable | X |
| HP DisplayPort to DisplayPort Cable | X |
| HP DisplayPort to DVI-D Adapter | X |
| HP DisplayPort to HDMI Adapter | X |
| HP DisplayPort to VGA Adapter | X |
| HP Serial Port Adapter | X |
| HP Parallel Port Adapter | X |

Standard Features and Configurable Components (availability may vary by country)

STORAGE

| Hard Drive | | | SFF/TWR |
|---|--|--|----------|
| 500 GB, 7200 rpm, SATA 6.0 Gb/s, SMART IV, 2.5" | | | X |
| 500 GB, 7200 rpm, SATA 6.0 Gb/s, SMART IV, 3.5" | | | X |
| 500GB, 10K rpm, SATA, 6.0Gb/s, SMART IV, 3.5" | | | X |
| 1 TB, 7200 rpm, SATA 6.0 Gb/s, SMART IV, 3.5" | | | X |
| 1 TB, 10K rpm, SATA 6.0 Gb/s, SMART IV, 3.5" | | | X |
| Hybrid Drives | | | |
| NOTE: Solid State Hybrid Drives are planned to be available in October 2013. | | | |
| 500GB SATA 6G 2.5 (8GB cache) SSHD Drive | | | X |
| 500GB SATA 6G 2.5 2nd Drive (8GB cache) with 3.5" adapter when install in SFF/TWR | | | X |
| 1TB SATA 6G 2.5 (8GB cache) SSHD Drive | | | X |
| 1TB SATA 6G 2.5 2nd Drive (8GB cache) with 3.5" adapter when install in SFF/TWR | | | X |
| Solid State Drives | | | |
| 120 GB SATA 6G 2.5 SSD (with 3.5" adapter when installed in SFF/TWR) | | | X |
| 128 GB (with 3.5" adapter when installed in SFF/TWR) | | | X |
| 160 GB (with 3.5" adapter when installed in SFF/TWR) | | | X |
| Self-encrypting Solid State Drive | | | |
| 128 GB (with 3.5" adapter when installed in SFF/TWR) | | | X |
| 256 GB (with 3.5" adapter when installed in SFF/TWR) | | | X |
| Optical Disc Drives | | | |
| Slim DVD-ROM | | | X |
| Slim BDXL Blu-ray Writer | | | X |
| Slim SuperMulti DVD Writer | | | X |
| HH Supermulti ODD | | | TWR only |
| Removable | | | |
| HP Slim Removable SATA HDD Frame/Carrier | | | X |

MEMORY

| Form Factor | Type | Maximum | # of Slots |
|-------------------|---------------------------------|---------|------------|
| Small Form Factor | DDR3 non-ECC Up to 1600 MT/s | 32 GB | 4 DIMM |
| Tower | DDR3 non-ECC Up to 1600 MT/s | 32 GB | 4 DIMM |

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Memory modules support data transfer rates up to 1600 MT/s; actual data rate is determined by the system's configured processor. See processor specifications for supported memory data rate.

Standard Features and Configurable Components (availability may vary by country)

NETWORKING/COMMUNICATIONS

Ethernet (RJ-45)

| | |
|--|----------|
| Intel I217LM Gigabit Network Connection (standard) | X |
|--|----------|

Wireless

| | |
|--|----------|
| Intel Centrino Advanced-N 6205 802.11 a/b/g/n PCI Express x1 Network Interface Card (optional) | X |
|--|----------|

AUDIO/MULTIMEDIA

SFF/TWR

| | |
|---|----------|
| HD audio with Realtek ALC221 codec (all ports are stereo) | X |
| DTS+ Sound + audio management technology | X |
| Microphone* and headphone front ports (3.5mm) | X |
| Line-out and Line-In rear Ports* (3.5mm) | X |
| Multi-streaming capable* | X |
| Internal speaker (standard) | X |

* The front microphone port is re-taskable as a Line-in, Microphone-in or Headphone-out port. Rear audio input ports are re-taskable as a Line-in or Microphone-in port. External speakers must be powered externally. Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks. This allows for different audio applications to use separate audio ports on the system. For example, the front jacks could be used with a headset for a communications application while the rear jacks are being used with external speakers and a multimedia application.

KEYBOARDS AND POINTING DEVICES

Keyboard

SFF/TWR

| | |
|---|----------|
| HP PS/2 Keyboard | X |
| HP USB Keyboard | X |
| USB Smart Card (CCID) Keyboard | X |
| HP USB and PS/2 Washable Keyboard | X |
| HP Wireless Keyboard and Mouse Combo (Keyboard contains 25% post-consumer recycled plastic material) | X |

Mice

| | |
|--------------------------------|----------|
| HP PS/2 Mouse | X |
| HP USB Mouse | X |
| HP USB 1000dpi Laser Mouse | X |
| HP USB and PS/2 Washable Mouse | X |

Standard Features and Configurable Components (availability may vary by country)

HP BIOS

Key features of the HP BIOS include:

- Deployment and manageability - HP BIOS provides several technologies that help integrate the HP ProDesk 600 G1 Series Business PC into the enterprise, such as PXE, remote configuration, remote control, and F10 Setup support for 12 languages.
- Stability - HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- UEFI specification 2.1
- Computrace agent - For tracking and tracing services, available in select countries, separate software and purchase of a subscription is required.
- Thermal and power management - The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Business Desktop computer in any enterprise environment.
- Acoustic performance - Industry leading acoustic emissions across the range of operating conditions.
- Serviceability - HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery - HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (DOSFlash), BIOS updates from within Windows (HPQFlash), HP Client Manager, and fail-safe recovery. In addition, the HP Business Desktop BIOS Utilities tool enables replicated BIOS setup throughout the Enterprise; it is available from within the BIOS software and from the support website.
- HP BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery.

Additional HP BIOS Features:

- Power-On password - Helps prevent an unauthorized user from powering on the system.
- Administrator password - Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) - Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. HP Elite models use ACPI to provide power conservation features.

S5 Max Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 1W in S5 (when turned off). When S5 Max Power Savings feature is enabled power to slots is turned off along with WOL functionality.

Standard Features and Configurable Components (availability may vary by country)

SECURITY

| | SFF/TWR |
|---|----------|
| Trusted Platform Module (TPM) 1.2 | X |
| SATA port disablement (via BIOS) | X |
| Drive lock | X |
| Intel® Identify Protection Technology (IPT) ¹ | X |
| Serial, parallel, USB enable/disable (via BIOS) | X |
| Optional USB Port Disable at factory (user configurable via BIOS) | X |
| Removable media write/boot control | X |
| Power-On password (via BIOS) | X |
| Setup password (via BIOS) | X |
| HP Chassis (1 bay) Security Kit | TWR only |
| Solenoid Hood Lock / Sensor | X |
| Support for chassis padlocks and cable lock devices | X |

¹Models configured with Intel Core processors have the ability to utilize advanced security protection for online transactions. IPT, used in conjunction with participating web sites, provides double identity authentication by adding a hardware component in addition to the usual user name and password. IPT is initialized through an HP Client Security module

ENVIRONMENTAL & REGULATORY

ENERGY STAR® qualified models available
 EPEAT® registered where applicable/supported. See www.epeat.net for registration status by country.
 Low halogen (chassis, all internal components and modules)
 TAA compliant

PORTS

I/O Ports - Standard

| | SFF/TWR |
|-------------------|--|
| USB 2.0 | 2 (front); 4 (rear) |
| USB 3.0 | 2 (front); 2 (rear) |
| Serial (RS-232) | 1 |
| PS/2 | 1 keyboard (purple) 1 mouse (green) |
| Video | 1 VGA (analog) 2 DisplayPort with multi-stream |
| Audio | 3.5mm headphone & mic jacks (front) 3.5mm audio in & out jacks (rear) |
| Network Interface | 1 RJ-45 |

I/O Ports - Optional

Standard Features and Configurable Components (availability may vary by country)

SFF/TWR

| | |
|---------------------|---|
| 2nd Serial (RS-232) | 1 |
| Parallel | 1 |

SLOTS

SFF/TWR

| | |
|-----------------|---|
| PCI Express x1 | 3 |
| PCI Express x16 | 1 |

BAYS

SFF/TWR

| | |
|-----------------------------|--------------------|
| Media Card Reader | 1 |
| Slim Optical Disc Drive | 1 |
| 3.5" internal storage drive | 1 - SFF 2 - TWR |
| 2.5" internal storage drive | 1 |

SERVICE AND SUPPORT

On-site Warranty ¹: Three-year (3-3-3) limited warranty delivers three years of on-site, next business day ² service for parts and labor and includes free telephone support ³ 24 x 7. Three-year onsite and labor are not available in all countries. Service offers terms up to 5 years by choosing a Care Pack. To choose the right level of service for your HP product, visit HP Care Pack Central: www.hp.com/go/cpc

NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply. Other warranty variations may be offered in your region.

NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

NOTE 3: Technical telephone support applies only to HP-configured Compaq and third-party HP qualified hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

Technical Specifications – Operating Systems, Software and eDocumentation

OPERATING SYSTEMS

Preinstalled

Windows 8 Pro (64-bit)*
Windows 8 (64-bit)*
Windows 7 Ultimate (32-bit)** (LAR only)
Windows 7 Ultimate (64-bit)**
Windows 7 Professional (32-bit)**
Windows 7 Professional (64-bit)**
Windows 7 Professional (32-bit) (available through downgrade rights from Windows 8 Pro)***
Windows 7 Professional (64-bit) (available through downgrade rights from Windows 8 Pro)***
Windows 7 Home Premium (32-bit)** (LAR only)
Windows 7 Home Premium (64-bit)**
FreeDOS 2.0
Novell SUSE Linux Enterprise Desktop 11

For all Preinstalled operating systems HP provides Microsoft WHQL certified (where applicable) drivers on www.hp.com at the time of product announcement.

Web Support

Windows 7 Enterprise (32-bit or 64-bit)
Windows 8 (64-bit)
Windows 8 Pro (64-bit)*
Windows 8 Enterprise (64-bit)**

For all Supported operating systems HP performs testing of the OS, and makes available all HP value add software (OS dependent). Certified drivers are made available on www.hp.com within 30 days of product announcement.

Limited Support

For all Limited Support operating systems HP will make available on www.hp.com certified drivers for major subsystems, if not provided by the operating system, within 30 days of product announcement.

HP performs functional testing on representative configurations. Some newer technologies may not be supported.

HP value added software and 3rd party applications (i.e. DVD players) are not supported.

Certified

Novell SUSE Linux Enterprise Desktop 111
Red Hat Enterprise Linux 641

For all Certified operating systems HP will submit hardware to the operating system vendor for testing and certification. All drivers would be obtained from the operating system vendor, not supplied by HP. Certification will be posted by the operating system vendor.

Test & Document

Windows® Vista Enterprise (32-bit or 64-bit)
Windows® Vista Professional (32-bit or 64-bit)
Windows® XP Professional (32-bit)

For all Test & Document operating systems HP will perform functional testing of the operating system on the HP business PC platform. Any issues found will be documented in an Engineering Advisory and/or Service Advisory and posted to www.hp.com. HP will not develop or qualify any drivers or perform any integration testing.

*Not all features are available in all editions of Windows 8. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8 functionality. See <http://www.microsoft.com>.

**Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

***This system is preinstalled with Windows® 7 Pro software and also comes with a license and media for Windows 8 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

Technical Specifications – Operating Systems, Software and eDocumentation

¹The following features are not supported by Novell SUSE Linux Enterprise Desktop:

- Intel Gigabit CT Desktop NIC
- Broadcom NetXtreme Gigabit Ethernet Plus
- HP 14-in-1 Media Card Reader
- HP Client Security
- HP Blu-ray Writer playback of commercial movies
- DisplayPort video interface
- HP 2nd serial port adapter
- Power Management features

Systems configured with Linux do not qualify for ENERGY STAR® Systems configured with Linux do not qualify for ENERGY STAR®

SOFTWARE COMPONENTS AND APPLICATIONS WITH WINDOWS

| Included | Windows 7 | Windows 8 |
|---------------------------|--|---|
| Security | Computrace (status tracing) ¹ Device Access Manager Drive Encryption ⁴ File Sanitizer (Activated via Wizard) Disk Sanitizer (external version) ² Microsoft Security Essentials HP Client Security | Computrace (status tracing) ¹ Device Access Manager Drive Encryption ⁴ File Sanitizer (Activated via Wizard) Disk Sanitizer (external version) ² Microsoft Defender Secure Erase HP Client Security |
| MultiMedia | Cyberlink Power DVD, BD Cyberlink Power2Go (Secure Burn) | Cyberlink Power DVD, BD Cyberlink Power2Go (Secure Burn) |
| Communication | | HP Wireless Hotspot |
| HP Value Add | HP ePrint Driver ³ HP PageLift HP Support Assistant HP Recovery Disk Creator | HP ePrint Driver ³ HP PageLift HP Recovery Manager HP Support Assistant HP QuickStart |
| 3rd Party | Adobe Flash Player Bing Search for Internet Explorer 10 Box PDF Complete, Corporate Edition Skype | Bing Search PDF Complete, Corporate Edition Skype |
| Microsoft Products | Buy Office | Buy Office |

¹ Computrace agent is shipped turned off, and must be activated by customers when they purchase a subscription. Subscriptions can be purchased for terms ranging from one to five years. Service is limited, check with Absolute for availability outside the U.S.

² Available via download

³ Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see www.hp.com/go/eprintcenter). Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary

⁴ Drive Encryption is planned to be available in October 2013. Requires Windows. Data is protected prior to Drive Encryption login.

Technical Specifications – Operating Systems, Software and eDocumentation

Turning the PC off or into hibernate logs out of Drive Encryption and prevents data access.

Technical Specifications - Graphics

Intel HD Graphics

| | | |
|-----------------------------------|---|-------------|
| VGA Controller | Integrated | |
| DisplayPort | Multimode capable; supports HDCP, Display Port Audio (2 streams), HBR2 link rates and Multi-Stream Technology for a maximum of 3 displays (including the integrated panel) | |
| Bus Type | N/A | |
| RAMDAC | N/A | |
| Memory | <p>Intel graphics do not have dedicated memory but utilizes some of the computer's system memory. The amount of memory used for graphics depends on the amount of system memory installed, BIOS settings, operating system, and system load. 32 MB is pre-allocated for graphics use at system boot time. Additional memory can be allocated at boot time by the BIOS for PAVP (Protected Audio Video Playback) support for playback of protected video content.</p> <p>Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.</p> | |
| Maximum Graphics Memory | Microsoft Windows 7 | Windows 8 |
| | Up to 1.7GB | Up to 1.8GB |
| | <p>NOTE: The actual amount of maximum graphics memory can be less than the amounts listed above depending upon your computer's configuration.</p> | |
| Maximum Color Depth | 32 bits/pixel | |
| Graphics/Video API Support | <p>4th Generation Core processors:</p> <ul style="list-style-type: none"> • The Processor Graphics contains a refresh of the seventh generation graphics core enabling substantial gains in performance and lower power consumption. Up to 16 EU support. • Next Generation Intel Clear Video Technology HD Support is a collection of video playback and enhancement features that improve the end user's viewing experience <ul style="list-style-type: none"> ○ Encode/transcode HD content ○ Playback of high definition content including Blu-ray Disc ○ Superior image quality with sharper, more colorful images • DirectX Video Acceleration (DXVA) support for accelerating video processing <ul style="list-style-type: none"> ○ Full AVC/VC1/MPEG2 HW Decode • Advanced Scheduler 2.0, 1.0 • Windows 7, Windows 8, Linux OS Support • DirectX 11.1 • OpenGL 4.0 • Open CL 1.2 <p>Supported Display Resolutions and Refresh Rates</p> <p>NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP</p> | |

Technical Specifications - Graphics

| Resolution | Refresh Rates |
|------------|---------------|
| 800x600 | 60 Hz |
| 1024x768 | 60 Hz |
| 1152x864 | 60 Hz |
| 1280x600 | 60 Hz |
| 1280x720 | 60 Hz |
| 1280x800 | 60 Hz |
| 1280x960 | 60 Hz |
| 1280x1024 | 60 Hz |
| 1360x768 | 60 Hz |
| 1366x768 | 60 Hz |
| 1400x1050 | 60 Hz |
| 1440x900 | 60 Hz |
| 1600x900 | 60 Hz |
| 1600x1200* | 60 Hz |
| 1680x1050 | 60 Hz |
| 1920x1080 | 60 Hz |
| 1920x1200* | 60 Hz |
| 1920x1440* | 60 Hz |
| 2560x1440* | 60 Hz |
| 2560x1600* | 60 Hz |

* Only supported on displays connected to the external DisplayPort connector.

AMD Radeon HD 7650A Graphics Card

| | |
|--------------------------------|---|
| Form Factor | MXM 3.0 |
| Graphics Controller | AMD Radeon HD 7650A |
| Core Clock | 600MHz |
| Memory Clock | 800MHz |
| Memory | 2GB, DDR3, 128-bit wide |
| Bus Type | MXM |
| Max. Power | 35W |
| Power Source Support | 12V and 19V |
| 3D API Support | DX11, SMS |
| HDCP Support | Yes |
| Display Max. Resolution | Digital 2560 x 1600 Analog 2048 x 1536 |
| Supported Graphics APIs | DX11, OpenGL, full 1080p BD (H264) playback in hardware, Multi-Stream DisplayPort support |

Technical Specifications - Graphics

Supported Display Resolutions and Refresh Rates

Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

| Resolution | Refresh Rates |
|-------------|---------------|
| 800 x 600 | 60 Hz |
| 1024 x 768 | 60 Hz |
| 1280 x 720 | 60 Hz |
| 1280 x 768 | 60 Hz |
| 1280 x 1024 | 60 Hz |
| 1360 x 768 | 60 Hz |
| 1440 x 900 | 60 Hz |
| 1600 x 900 | 60 Hz |
| 1680 x 1050 | 60 Hz |
| 1920 x 1080 | 60 Hz |

NVIDIA NVS 310 Graphics Card

Introduction

The NVIDIA® NVS™ 310 Graphics Card is a PCI Express low profile form factor graphics add-in card targeted as an active low cost graphics solution for the corporate business and enterprise markets.

The NVIDIA® NVS 310 graphics card is an ideal solution for customers requiring a small form factor graphics add-in card for either standard or small form factor PC designs.

Performance and Features

The NVIDIA® NVS 310 Graphics Card offers 512 MB of ultrafast DDR3 memory and is capable of supporting up to 2 displays.

DisplayPort connector supports multimode technology to support connection to DVI-D, VGA and HDMI monitors with optional adapters in kits NR078AA, FH973AT, BP937AA, AS615AA.

For a DisplayPort to DisplayPort connections use the optional DisplayPort Cable Kit VN567AA.

Form Factor

Low Profile: 2.713 x 6.15 in

Graphics Controller

NVIDIA® NVS 310

Memory Clock

875MHz

Memory Size

512 MB DDR3

Memory Bandwidth

14 GB/s

Max. Power

19.5W

Display Max. Resolution

Up to 2560 x 1600 (digital display) per display

Display Output

Up to 2 displays in the following configurations

DisplayPort output:

- Drives two DisplayPort enabled digital display at resolutions up to 2560 x 1600 at 60 Hz with reduced blanking, when connected natively using the 2 DisplayPort connectors on the NVS 310 graphics card
- Supports 2 monitors up to resolution of 1920 x 1200 at 60 Hz with reduced blanking using DisplayPort Multi-Stream topology technology.

Technical Specifications - Graphics

- | | |
|---------------------|--|
| DVI-D output: | <ul style="list-style-type: none"> • Drives two digital display at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking using DisplayPort to DVI-D single-link cable adaptors • Drives two digital display at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking using DisplayPort to DVI-D dual-link cable adaptors |
| HDMI output: | <ul style="list-style-type: none"> • NVS 310 is capable of driving two high definition (HD) panels up to resolutions of 1920 × 1080P at 60 Hz using DisplayPort to HDMI cable adaptors |
| VGA display output: | <ul style="list-style-type: none"> • Drives two analog display at resolutions up to 1920 × 1200 at 60 Hz using DisplayPort to VGA cable adaptors |

Supported Display Resolutions and Refresh Rates

Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

| Resolution | DisplayPort to VGA | DisplayPort to DVI-D | DisplayPort to HDMI | DisplayPort |
|-------------|--------------------|----------------------|---------------------|-------------|
| 640 x 480 | 85 | 60 | 60 | 60 |
| 800 x 600 | 85 | 60 | 60 | 60 |
| 1024 x 768 | 85 | 60 | 60 | 60 |
| 1280 x 720 | 85 | 60 | 60 | 60 |
| 1280 x 1024 | 85 | 60 | 60 | 60 |
| 1440 x 900 | 75 | 60 | 60 | 60 |
| 1600 x 1200 | 60 | 60 | 60 | 60 |
| 1680 x 1050 | 60 | 60 | 60 | 60 |
| 1920 x 1080 | 60-R | 60-R | 60 | 60 |
| 1920 x 1200 | 60-R | 60-R | | 60 |
| 1920 x 1440 | | | | 60 |
| 2048 x 1536 | | | | 60 |
| 2560 x 1600 | | | | 60 |

NVIDIA GeForce GT630 Graphics Card

Introduction

The NVIDIA GeForce GT630 DP (2GB) PCIe x16 Card Graphics Card provides a full height, PCI Express x16 graphics add-in card solution based on the NVIDIA Kepler Architecture GPU. The card is designed to support three display connections through its DVII, and two DisplayPort connectors.

An ideal solution for desktop PC customers seeking enhanced 2D and advanced 3D graphics performance, the NVIDIA GeForce GT630 DP (2GB) PCIe x16 Cards are an excellent choice for business users who want run multiple displays from a single graphics board. Engage in Web conferencing or video or photo editing, while improving your everyday business PC experience with better graphics and excellent visual display quality.

Performance and Features

The NVIDIA GeForce GT630 DP (2GB) PCIe x16 Cards deliver superior PCI Express (PCIe) Gen 3 features including:

- Unprecedented flexibility for new applications and enhanced performance
- Support for NVIDIA surround technology
- Run multiple displays from a single graphics card

Technical Specifications - Graphics

- Full 16 lane PCIe Generation 3 bus support with peak bandwidth support
- Wireless Display ready for future support

| | |
|--------------------------------|---|
| Form Factor | PCIe x16 Card |
| Graphics Controller | NVIDIA Kepler Architecture GPU |
| Core Clock | 875 MHz |
| Memory Clock | 891 MHz |
| Memory Size | 2 GB DDR3 128 bit |
| Memory Bandwidth | 28.5 GB/s |
| Display Max. Resolution | 2560 x 1600 digital, 2048 x 1536 analog |
| Display Output | Integrated 400 MHz RAMDAC |

Supported Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

| Resolution | Maximum Refresh Rates (Hz) | |
|-------------|----------------------------|--------------------|
| | Analog Connection | Digital Connection |
| 640 x 480 | 85 | 60 |
| 800 x 600 | 85 | 60 |
| 1024 x 768 | 85 | 60 |
| 1280 x 720 | 85 | 60 |
| 1280 x 1024 | 85 | 60 |
| 1440 x 900 | 75 | 60 |
| 1600 x 1200 | 85 | 60 |
| 1680 x 1050 | 75 | 60 |
| 1920 x 1080 | 85 | 60-R |
| 1920 x 1200 | 85 | 60-R |
| 1920 x 1440 | 85 | 60 |
| 2048 x 1536 | 75 | 60 |
| 2560 x 1600 | N/A | 60 |

Technical Specifications - Graphics

NVIDIA NVS 315 1GB PCIe x 16 Graphics Card

| | |
|---------------------------------|--|
| Introduction | Get efficient dual-display graphics performance in a PCI Express low-profile graphics card with the NVIDIA NVS 315 PCIe x16 1 GB Graphics Card, an ideal desktop graphics solution for professional business and commercial applications. |
| Performance and Features | <p>The NVIDIA® NVS 315 Graphics Card offers 1 GB of ultrafast DDR3 memory and is capable of supporting up to 2 displays.</p> <p>DisplayPort connector supports multimode technology to support connection to DVI-D, VGA and HDMI monitors with optional adapters in kits NR078AA, FH973AT, BP937AA, AS615AA.</p> <p>For a DisplayPort to DisplayPort connections use the optional DisplayPort Cable Kit VN567AA.</p> |
| Form Factor | Low Profile: 2.713 × 6.15 in |
| Graphics Controller | NVIDIA® NVS 315 |
| Memory Clock | 875MHz |
| Memory Size | 512 MB DDR3 |
| Memory Bandwidth | 14 GB/s |
| Connectors | DMS-59 , with support for dual VGA, dual DVI or dual Display Port with the appropriate adapter cable |
| Display Max. Resolution | Up to 2048 x 1536 VGA; 1920 x 1200 DVI; 2560 x 1600 DisplayPort |
| Display Output | Up to 2 displays in the following configurations |

Supported Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

| Resolution | Maximum Refresh Rates (Hz) by Connection | |
|-------------|--|--------------------|
| | Analog Connection | Digital Connection |
| 640 x 480 | 85 | 60 |
| 720 x 480 | 85 | 60 |
| 720 x 576 | 85 | 60 |
| 800 x 600 | 85 | 60 |
| 1024 x 768 | 85 | 60 |
| 1280 x 720 | 85 | 60 |
| 1280 x 768 | 85 | 60 |
| 1280 x 1024 | 85 | 60 |
| 1440 x 900 | 75 | 60 |
| 1600 x 1024 | 85 | 60 |
| 1600 x 1200 | 85 | 60 |
| 1680 x 1050 | 75 | 60 |
| 1920 x 1080 | 85 | 60-R |
| 1920 x 1200 | 85 | 60-R |
| 1920 x 1440 | 85 | N/A |
| 2048 x 1536 | 75 | N/A |
| 2560 x 1440 | N/A | 60* |
| 2560 x 1600 | N/A | 60* |

Technical Specifications - Graphics

* Display Port Only

AMD Radeon HD 8350 1GB PCIe x16 DH Graphics Card

| | |
|--------------------------------|--|
| Introduction | Get stable 2D and advanced 3D graphics performance from the AMD Radeon HD 8350 1 GB PCIe x16 DH Graphics Card, a low profile, PCI Express x16 graphics add-in card based on the AMD Radeon HD 8350 GPU, great for Web conferencing or video and photo editing. |
| Form Factor | PCIe x16 |
| Graphics Controller | AMD Radeon HD 8350 |
| Core Clock | GPU engine operates at 523 MHz |
| Memory | 1GB, DDR3, SDRAM |
| Memory Clock | 875 MHz |
| HDCP Support | Yes |
| Display Max. Resolution | Digital 1920 x 1200 Analog 2048 x 1536 |

Supported Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

| | Analog Connection | Digital Connection |
|-------------|-------------------|--------------------|
| 640 x 480 | 85 | 60 |
| 720 x 480 | 85 | 60 |
| 720 x 576 | 85 | 60 |
| 800 x 600 | 85 | 60 |
| 1024 x 768 | 85 | 60 |
| 1280 x 720 | 85 | 60 |
| 1280 x 768 | 85 | 60 |
| 1280 x 1024 | 85 | 60 |
| 1440 x 900 | 75 | 75 |
| 1600 x 1024 | 85 | 60 |
| 1600 x 1200 | 85 | 60 |
| 1680 x 1050 | 75 | 75-R |
| 1920 x 1080 | 85 | 60-R |
| 1920 x 1200 | 85 | 60-R |
| 1920 x 1440 | 85 | N/A |
| 2048 x 1536 | 75 | N/A |
| 2560 x 1440 | N/A | N/A |
| 2560 x 1600 | N/A | N/A |

Technical Specifications - Graphics

AMD Radeon HD 8490 1GB PCIe x16 Graphics Card

| | |
|--------------------------------|---|
| Introduction | Get impressive graphics and high resolution dual-display performance in a low profile, PCI Express x16 graphics add-in card based on the AMD Radeon HD 8490 Graphics Processor. Improve your everyday PC, Web conferencing, and video or photo editing. |
| Form Factor | PCIe x16 |
| Graphics Controller | AMD Radeon HD 8490 |
| Core Clock | GPU engine operates at 875 MHz |
| Memory | 1GB, DDR3, SDRAM |
| Memory Clock | 900 MHz |
| HDCP Support | Yes |
| Display Max. Resolution | Digital 2560 x 1600 Analog 2048 x 1536 |

Supported Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

| | Analog Connection | Digital Connection |
|-------------|-------------------|--------------------|
| 300 x 200 | 85 | 60 |
| 320 x 240 | 85 | 60 |
| 400 x 300 | 85 | 60 |
| 640 x 480 | 85 | 60 |
| 720 x 480 | 85 | 60 |
| 720 x 576 | 85 | 60 |
| 800 x 600 | 85 | 60 |
| 1024 x 768 | 85 | 60 |
| 1280 x 720 | 85 | 60 |
| 1280 x 768 | 85 | 60 |
| 1280 x 1024 | 85 | 60 |
| 1440 x 900 | 75 | 75 |
| 1600 x 900 | 85 | 60 |
| 1600 x 1024 | 85 | 60 |
| 1600 x 1200 | 85 | 60 |
| 1680 x 1050 | 75 | 75-R |
| 1920 x 1080 | 85 | 60-R |
| 1920 x 1200 | 85 | 60-R |
| 1920 x 1440 | 85 | N/A |
| 2048 x 1536 | 75 | N/A |
| 2560 x 1440 | N/A | 60 |
| 2560 x 1600 | N/A | 60 |

Technical Specifications - Hard Disk and Solid State Storage

Introduction:

HP Serial Advanced Technology Attachment (SATA) Hard Drives maximize the performance of HP Business PCs by providing the technologies to meet your increasing storage demands with high-capacity drives offering superior reliability and performance.

SATA provides faster data transfer speeds, better system cooling airflow, more bandwidth, more headroom for speed increases in future generations and better data integrity. A next-generation technology, the SATA interface connects hard drives to the PC platform enabling easy aggregation of multiple hard drives into a single PC. This offers you the additional benefits of dedicated bandwidth, the ability to more easily identify device failures and scalability. The HP ProDesk 600 G1 Series Business PC supports the latest SATA 6.0Gb/s specification.

HP Drive Lock

HP Serial ATA Hard Drives offer enhanced security via a new Drive Lock. When enabled, this ATA security feature set prevents software access to user data on the drive until one or two user-defined passwords are provided.

SMART IV Technology

Self Monitoring Analysis and Reporting Technology (SMART) hard drive technology allows hard drives to monitor their own health and to raise flags if imminent failures are predicted. If the drive determines that a failure is imminent, the SMART hard drive technology enables the intelligent manageability or management software to generate a fault alert. While the current versions of SMART hard drives do a good job monitoring the data on the hard drive media, the ever increasing emphasis on reliability and quality has promoted HP to implement SMART IV technology which constantly checks that the data flow from host interface to media and media to host interface is not compromised. This is accomplished by inserting a 2 byte parity code into every 512 byte block in the data path of the hard drive's Cache RAM. This unique parity checking performed by HP's SMART IV technology hard drives, allows for more complete error detection coverage encompassing the entire data path between the host and the hard drive.

Smart IV is also known as IOEDC: I/O Error Detection Code.

Native Command Queuing

NCQ or Native Command Queuing is a SATA protocol extension that allows the hard drive to have several write or read commands outstanding at the same time. In contrast, normal non-queued operation requires each command to be completed before the next command is issued by the host system. Queuing allows the drive to complete the commands in the order that allows for best overall throughput. It also involves an advanced method of transferring data to or from the host, called First Party Direct Memory Access (FPDMA), which allows the hard drive and the host controller to manage the data transfers for multiple outstanding commands, without involving the host processor. NCQ can contribute to better performance but the results are dependent on many factors, including the access patterns of the various applications and operating system functions that are initiating drive accesses. Enabling NCQ features in the hard drive requires AHCI support from the host system BIOS, controller, and driver. AHCI support is typically implemented in RAID configurations.

NOTE: GB = 1 billion bytes. Actual available capacity is less.

Technical Specifications - Hard Disk and Solid State Storage

HP 500-GB 7200 RPM SATA 2.5" Self-Encrypting (SED) Hard Disk Drive

| | | |
|-----------------------------------|---|--------|
| Capacity | 500,107,862,016 bytes | |
| Rotational Speed | 7,200 rpm | |
| Drive Type | Self-Encrypting Drive (SED) with SATA interface | |
| Interface | SATA Interface conforming to Serial ATA International Organization: Serial ATA Revision 2.6 | |
| Segmented Buffer with write cache | 32768 KB - A portion of buffer capacity used for firmware | |
| Number of Sectors | 976,773,168 | |
| Seek Time (typical reads) | Single Track: | 1.0 ms |
| | Average: | 13 ms |
| | Full-Stroke | 25 ms |
| Media Diameter | 2.5 in/63.5 mm | |
| Height | 0.267 in/6.8 mm, ± 0.2 mm | |
| Width | 2.75 in/69.85 mm, ± 0.25 mm | |
| Length | 3.945 in/100.2 mm, ± 0.25 mm | |
| Weight | 3.35 oz/95 g (max) | |
| Operating Temperature | 32° to 140° F (0° to 60° C) | |

HP 1-TB SATA 6G 2.5" 8GB Solid State Hybrid Drive (SSHD) (Coming Soon)

| | | |
|--|--|--------|
| Formatted Capacity | 1 TB | |
| Spindle Speed | 5,400 rpm +/- 0.2% | |
| Drive Type | Solid State Hybrid Drive (SSHD) technology with NAND Flash | |
| Interface | Serial ATA (SATA) | |
| Cache Buffer | 64 MB | |
| NAND Flash Commercial Multilevel Cell (cMLC) | 8 GB | |
| Number of Sectors | 976,773,168 | |
| Seek Time (typical reads) | Single Track: | 2.0 ms |
| | Average: | 12 ms |
| Height | 0.374 +/- .008 in (9.5 +/- 0.2 mm) | |
| Width | 2.750 +/- 0.010 in (69.85 +/- 0.25 mm) | |
| Length | 3.951 +0.008 / -0.010 in (100.35 +0.20 / -0.25 mm) | |
| Weight | 0.254 lb/115 g (max) | |
| Operating Temperature | 32° to 140° F (0° to 60° C) | |

Technical Specifications - Hard Disk and Solid State Storage

HP 500 GB SATA 6G 2.5" 8GB Solid State Hybrid Drive (SSHD) (Coming Soon)

| | |
|---|--|
| Formatted Capacity | 500 GB |
| Spindle Speed | 5,400 rpm +/- 0.2% |
| Drive Type | Solid State Hybrid Drive (SSHD) technology with NAND Flash |
| Interface | Serial ATA (SATA) |
| Cache Buffer | 64 MB |
| NAND Flash Commercial Multilevel Cell (cMLC) | 8 GB |
| Number of Sectors | 976,773,168 |
| Seek Time (typical reads) | Single Track: 2.0 ms |
| | Average: 12 ms |
| Height | 0.268 +/- .008 in (6.8 +/- 0.2 mm) |
| Width | 2.750 +/- 0.010 in (69.85 +/- 0.25 mm) |
| Length | 3.951 +0.008 / -0.010 in (100.35 +0.20 / -0.25 mm) |
| Weight | 0.209 lb/95 g (max) |
| Operating Temperature | 32° to 140° F (0° to 60° C) |

HP 120 GB Solid State Drive

| | | |
|---|--|-------------------------------|
| Unformatted Capacity | 120 GB | |
| Architecture | Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller | |
| Interface | Serial ATA 2.0 (3.0 Gb/s) | |
| Dimensions (W x H x D) | 2.74 x 0.37 x 4 in (6.98 x 0.95 x 10.2 cm) | |
| Weight | 0.18 lb (80 g) | |
| Bandwidth Performance | Sustained Sequential Read: | Up to 250 MB/s |
| | Sustained Sequential Write: | Up to 70 MB/s |
| | Random Read: | Up to 35K IOPs |
| | Random Write: | Up to 6.6K IOPs |
| Latency | Read: | 65-ms |
| | Write: | 85-ms |
| Power | DC power requirement: | 5 VDC 5%-100 mV ripple p-p |
| | Total power consumption: | 0.15W (active); 0.075W (idle) |
| Useful Drive Life | 35TB written, up to 20GB/day for 5 years | |
| Environmental (all conditions, non-condensing) | Operating Temperature: | 32° to 158° F (0° to 70° C) |
| | Relative Humidity: | 5% to 95% |
| | Maximum Wet Bulb Temperature (operating): | 84° F (29° C) |
| | Shock: | 1,500 G/0.5-ms |

* For solid state disk drives, GB means 1 billion bytes. 128GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity will vary by content

** The product achieves a mean time between failure (MTBF) based on population statistics not relevant to individual units.

Technical Specifications - Hard Disk and Solid State Storage

HP 128 GB Solid State Drive

| | | |
|--|--|----------------------------------|
| Unformatted Capacity | 128 GB* | |
| Architecture | Multi Level Cell (MLC) NAND | |
| Interface | SATA 6 GB/sec | |
| Dimensions (W x H x D) | 2.75 x 0.276 x 3.96 in (6.985 x 0.7 x 10.05 cm) | |
| Weight | 0.16 lb (73 g) | |
| Bandwidth Performance | Sustained Sequential Read: | Up to 450 MB/ss |
| | Sustained Sequential Write: | Up to 260 MB/s |
| | Random Read (4KB): | up to 46K IOPs |
| | Random Write (4KB): | up to 56K IOPs |
| Latency | Read: | 55ms (TYP) |
| | Write: | 55ms (TYP) |
| Power | DC power requirement: | Min 4.5 V; Max 5.5 V |
| | Total power consumption: | 160 mW (Active) ; <85 mW; (Idle) |
| Useful Drive Life | 1.2 million device hours** | |
| Environmental (all conditions, non-condensing) | Operating Temperature: | 32° to 158° F (0° to 70° C) |
| | Relative Humidity (operating): | 5% to 95% |
| | Shock: | 1,500 G/1.0 msec |
| Regulations | UL, CSA, EN 60950-2000, CISPR Pub 22 Class B, CNS 13438, AS/NZS CISPR 22:2002 Class B, Korea KCC, CE Mark | |

* For solid state disk drives, GB means 1 billion bytes. 128GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity will vary by content

** The product achieves a mean time between failure (MTBF) based on population statistics not relevant to individual units.

HP 160 GB Solid State Drive

| | | |
|-------------------------------|---|---------------------------------------|
| Unformatted Capacity | 160 GB* | |
| Architecture | Multi Level Cell (MLC) NAND | |
| Interface | SATA 3 GB/sec | |
| Dimensions (W x H x D) | 2.74 x 0.37 x 4 in (6.98 x 0.95 x 10.2 cm) | |
| Weight | 0.18 lb (80 g) | |
| Bandwidth Performance | Sustained Sequential Read: | Up to 250 MB/s |
| | Sustained Sequential Write: | Up to 70 MB/s |
| | Random Read (4KB): | up to 35K IOPs |
| | Random Write (4KB): | up to 6.6K IOPs |
| Latency | Read: | 65 ms |
| | Write: | 85 ms |
| Power | DC power requirement: | 5 VDC 5%-100 mV ripple p-p |
| | Total power consumption: | 0.15 Watt (Active); 0.075 Watt (Idle) |
| Useful Drive Life | 35TB written, up to 20GB/day for 5 years ** | |

Technical Specifications - Hard Disk and Solid State Storage

| | | |
|--|---|-----------------------------|
| Environmental (all conditions, non-condensing) | Operating Temperature: | 32° to 158° F (0° to 70° C) |
| | Relative Humidity (operating): | 5% to 95% |
| | Shock: | 1,500 G/1.0 msec |
| Regulations | UL, CSA, EN 60950-2000, CISPR Pub 22 Class B, CNS 13438, AS/NZS CISPR 22:2002 Class B, Korea KCC, CE Mark | |

* For solid state disk drives, GB means 1 billion bytes. 128GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity will vary by content

** The product achieves a mean time between failure (MTBF) based on population statistics not relevant to individual units.

HP 256 GB SATA 2.5" Self-Encrypting (SED) Solid State Drive

| | | |
|---|---|--|
| Unformatted Capacity | 256,186,209,271 bytes | |
| Architecture | Self-Encrypting (SED) Solid State Drive with 25nm MLC NAND Flash and SATA interface | |
| Interface | Serial ATA 2.0 (3.0 Gb/s) | |
| NAND Flash | 25nm MLC NAND Flash | |
| Height | .275 in/7mm | |
| Width | 2.75 in/69.85 mm | |
| Length | 3.95 in/100.5 mm | |
| Weight | 0.161 lb (73 g) | |
| Bandwidth Performance | Sustained Sequential 128k Read: Up to 450 MB/ss | |
| | Sustained Sequential 128k Write: Up to 260 MB/s | |
| | Random 4k Read: | up to 46K IOPs |
| | Random 4k Write: | up to 56K IOPs |
| Latency | Read: | 55 μs |
| | Write: | 55 μs |
| Power | SATA power consumption: | 160 mW (active average); <85 mW (idle average) |
| Useful Drive Life | 72TB written, up to 40GB/day for 5 years | |
| Environmental (all conditions, non-condensing) | Operating Temperature: | 32° to 158° F (0° to 70° C) |
| | Relative Humidity: | 5% to 95% |
| | Shock: | 1,500 G/1 ms |

Technical Specifications - Hard Disk and Solid State Storage

HP 500-GB 7200 rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

| | | |
|--|--------------------------------|--------|
| Capacity | 500,107,862,016 bytes | |
| Rotational Speed | 7,200 rpm | |
| Interface | Serial ATA 3.0 (6.0 Gb/s) | |
| Buffer Size | 16 MB | |
| Logical Blocks | 976,773,168 | |
| Seek Time (typical reads, includes controller overhead, including settling) | Single Track: | 2.0 ms |
| | Average: | 11 ms |
| | Full-Stroke: | 21 ms |
| Height (nominal) | 1 in/2.54 cm | |
| Width (nominal) | Media diameter: 3.5 in/8.89 cm | |
| | Physical size: 4 in/10.2 cm | |
| Operating Temperature | 41° to 131° F (5° to 55° C) | |

HP 1-TB 7200 rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

| | | |
|--|--------------------------------|--------|
| Capacity | 1,000,204,886,016 bytes | |
| Rotational Speed | 7,200 rpm | |
| Interface | Serial ATA 3.0 (6.0 Gb/s) | |
| Buffer Size | 32 MB | |
| Logical Blocks | 1,953,525,168 | |
| Seek Time (typical reads, includes controller overhead, including settling) | Single Track: | 2.0 ms |
| | Average: | 11 ms |
| | Full-Stroke: | 21 ms |
| Height (nominal) | 1 in/2.54 cm | |
| Width (nominal) | Media diameter: 3.5 in/8.89 cm | |
| | Physical size: 4 in/10.2 cm | |
| Operating Temperature | 41° to 131° F (5° to 55° C) | |

Technical Specifications - Removable Storage

HP Slim SuperMulti DVD Writer Drive

| | | |
|--------------------------------|---|---|
| Height | 12.7mm height | |
| Orientation | Either horizontal or vertical | |
| Interface type | SATA/ATAPI | |
| Disc recording capacity | Up to 8.5 GB DL or 4.7 GB standard | |
| Dimensions (W x H x D) | 5.04 x 0.5 x 5.0 in (128 x 12.7 x 127 mm) without bezel | |
| Weight (max) | 0.42 lb (190 g) | |
| Write speeds | DVD-RAM | Up to 5X |
| | DVD-R DL | Up to 6X |
| | DVD+R | Up to 8X |
| | DVD+RW | Up to 8X |
| | DVD+R DL | Up to 6X |
| | DVD-R | Up to 8X |
| | DVD-RW | Up to 6X |
| | CD-R | Up to 24X |
| | CD-RW | Up to 24X |
| | DVD-RAM | Up to 5X |
| | DVD-RW, DVD+RW | Up to 8X |
| | DVD-R DL, DVD+R DL | Up to 8X |
| | DVD+R, DVD-R | Up to 8X |
| | DVD-ROM DL, DVD-ROM | Up to 8X |
| | CD-ROM, CD-R | Up to 24X |
| | CD-RW | Up to 24X |
| Read speeds | Random | DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical) |
| | Full Stroke | DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical) |
| | Stop Time | 6 seconds (typical) |
| | Source | Slimline SATA DC power receptacle |
| Power | DC Power Requirement | 5 VDC \pm 5%-100 mV ripple p-p |
| | DC Current | 5 VDC (< 1000 mA typical, 1600 mA maximum) |

Technical Specifications - Removable Storage

| | | |
|---|------------------------------|-----------------------------|
| Environmental conditions (operating - non-condensing) | Temperature | 41° to 122° F (5° to 50° C) |
| | Relative Humidity | 10% to 80% |
| | Maximum Wet Bulb Temperature | 84° F (29° C) |

HP Slim Blu-ray BDXL Drive

| | | | |
|--------------------------------------|---|-----------|------------------------------------|
| Height | 12.7mm Slim tray-load | | |
| Orientation | Either horizontal or vertical | | |
| Interface type | SATA/ATAPI | | |
| Disc capacity | Up to 128 GB QL, 100 GB TL, 50 GB DL or 25 GB standard SL | | |
| Dimensions W x H x D (max) | 5.04 x 0.5 x 5.0 in (128 x 12.7 x 127 mm) without bezel | | |
| Weight (max) | Up to 0.37 lb (170 g) without bezel | | |
| Write speeds | Triple-layer | | |
| | BD-R | Up to 4x | Quadruple-layer Up to 4x |
| | BD-RE | Up to 2x | Not supported |
| | Single-layer | | |
| | BD-R | Up to 6x | Double-layer Up to 6x |
| | BD-RE | Up to 2x | Up to 2x |
| | DVD-R | Up to 8x | Up to 6x |
| | DVD-RW | Up to 6x | Not supported |
| | DVD+R | Up to 8x | Up to 6x |
| | DVD+RW | Up to 8x | Not supported |
| | DVD-RAM | Up to 5x | N/A |
| | CD-R | Up to 24x | N/A |
| | CD-RW | Up to 24x | N/A |
| | Triple-layer | | |
| | BD-R | Up to 4x | Quadruple-layer Up to 4x |
| | BD-RE | Up to 4x | Not supported |
| Read speeds | Single-layer | | |
| | BD-ROM | Up to 6X | Double-layer Up to 6X |
| | BD-R | Up to 6x | Up to 6x |
| | BD-RE | Up to 6x | Up to 6x |
| | DVD-ROM | Up to 8x | Up to 8x |
| | DVD-R | Up to 8x | Up to 8x |
| | DVD-RW | Up to 8x | Not supported |
| | DVD+R | Up to 8x | Up to 8X |
| | DVD+RW | Up to 8x | Not supported |

Technical Specifications - Removable Storage

| | | |
|---|---|---|
| | BDMV (AACs Compliant Disc) | Up to 6x/2x (Read/Play) |
| | DVD-RAM | Up to 5x |
| | DVD-Video (CSS Compliant Disc) | Up to 8x/4x (Read/Play) |
| | CD-R/RW/ROM | Up to 24x |
| | CD-DA (DAE) | Up to 20x/10x (Read/Play) |
| Access times (typical reads, including setting) | Random | BD-ROM: 205 ms (typical), DVD-ROM: 185 ms (typical), CD-ROM: 165 ms (typical) |
| | Full Stroke | BD-ROM: 350 ms (typical), DVD-ROM: 345 ms (typical), CD-ROM: 340 ms (typical) |
| Power | Source | Slimline SATA DC power receptacle |
| | DC Power Requirement | 5 VDC \pm 5%-100 mV ripple p-p |
| | DC Current | 5 VDC -1200 mA typical, 2000 mA maximum |
| Environmental (all conditions non-condensing) | Temperature (operating) | 41° to 122° F (5° to 50° C) |
| | Relative Humidity (operating) | 10% to 80% |
| | Maximum Wet Bulb Temperature (operating) | 84° F (29° C) |

HP Slim DVD-ROM Drive

| | | |
|---|---|---|
| Height | 12.7mm | |
| Orientation | Either horizontal or vertical | |
| Interface type | SATA/ATAPI | |
| Dimensions (W x H x D) | 5.04 x 0.5 x 5.0 in (128 x 12.7 x 127 mm) without bezel | |
| Weight (max) | Up to 0.37 lb (170 g) without bezel | |
| Read speeds | DVD+R/-R/+RW/-RW/+R DL/-R DL | Up to 8X |
| | DVD-ROM | Up to 8X |
| | CD-ROM, CD-R | Up to 24X |
| | CD-RW | Up to 24X |
| Access time (typical reads, including settling) | Random | DVD-ROM: 170 ms (typical), CD-ROM: 170 ms (typical) |
| | Full Stroke | DVD-ROM: 320 ms (typical), CD-ROM: 320 ms (typical) |
| Power | Source | Slimline SATA DC power receptacle |
| | DC Power Requirement | 5 VDC \pm 5%-100 mV ripple p-p |
| | DC Current | 5 VDC - <1000 mA typical, < 1600 mA maximum |

Technical Specifications - Removable Storage

| | | |
|--|--|-----------------------------|
| Environmental (all conditions non-condensing) | Temperature | 41° to 122° F (5° to 50° C) |
| | Relative Humidity | 10% to 80% |
| | Maximum Wet Bulb Temperature (operating) | 84° F (29° C) |

Technical Specifications – Memory

System Memory Support

The HP ProDesk 600 G1 Business PC supports the 4th generation Intel® Core™ processor family. Based on a new PC micro-architecture, the processor is designed for a two-chip platform consisting of a processor and Platform Controller Hub (PCH). Unlike previous generations, the 4th generation Intel® Core™ processor includes an Integrated Memory Controller (IMC). The IMC supports DDR3/DDR3L protocols with two independent, 64-bit wide channels each accessing one or two DIMMs.

- Two channels of non-ECC DDR3/DDR3L unbuffered dual in-line memory modules (UDIMM) with a maximum of two DIMMs per channel
- Single-channel and dual-channel memory organization modes
- Data burst length of eight for all memory organization modes
- Memory data transfer rates of up to 1600 MT/s; actual supported data transfer rate determined by the configured processor.
- 64-bit wide channels
- DDR3/DDR3L system memory I/O voltage of 1.5V
- Theoretical maximum memory bandwidth of:
 - 21.3 GB/s in dual-channel mode assuming 1333 MT/s
 - 25.6 GB/s in dual-channel mode assuming 1600 MT/s

Platform Memory Support

- The Small Form Factor (SFF) and Tower (TWR) platforms support up to four (4) industry-standard DDR3-SDRAM DIMMs.

CAUTION: You must shut down the computer and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Technical Specifications - Networking and Communications

Intel® I217LM GbE Network Connection (integrated)

| | |
|------------------------------|---|
| Connector | RJ-45 |
| System Interface | Integrated on PCA |
| Controller | Intel I217LM GbE platform LAN connect networking controller |
| Memory | 24 KB FIFO packet buffer memory |
| Data rates supported | 10/100/1000 Mbps |
| IEEE Compliance | 802.1P |
| | 802.1Q |
| | 802.2 |
| | 802.3 |
| | 802.3ab |
| | 802.3az |
| Bus architecture | 802.3u |
| | PCI Express and SMBus |
| Data transfer mode | PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state) |
| Power requirement | Requires 3.3V and 0.9V or just 3.3V with integrated regulators Power consumption 0.733 Watts |
| Boot ROM support | Yes |
| Network transfer mode | Full-duplex |
| | Half-duplex (not supported for the 1000BASE-T transceiver) |
| Network transfer rate | 10BASE-T (half-duplex) 10 Mbps |
| | 10BASE-T (full-duplex) 20 Mbps |
| | 100BASE-TX (half-duplex) 100 Mbps |
| | 100BASE-TX (full-duplex) 200 Mbps |
| | 1000BASE-T (full-duplex) 2000 Mbps |
| Environmental | Operating Temperature: 0° to 85° C |
| | Operating Humidity: 60% RH |
| Management | WOL, auto MDI crossover, PXE, Muli-port teaming, RSS, Advanced cable diagnostic |
| Alerting | ASF 2.0 support; AMT 9.0 support |

Intel Centrino Advance-N 6205 Wireless Network Interface Connection

| | |
|-------------------------------|--|
| Wireless LAN Standards | IEEE 802.11a/b/g/n IEEE 802.11 e, 802.11i, 802.11d, 802.11d, 802.11h |
| Interoperability | Wi-Fi certified (802.11 a/b/g/n WMM, WPA, WPA2 and WPS) |
| | Tested with wireless access points from several major manufacturers |
| | OS compatible with Microsoft Windows, Win7 and XP |
| | Cisco Compatible Extensions Program compliant (802.11a/b/g only) with Microsoft Windows XP and Windows 7 |
| Frequency Band | 2.4 GHz and 5 GHz |
| Antenna Structure | 2 transmit; 2 receive (2x2) |

Technical Specifications - Networking and Communications

| | | |
|---|--|--|
| Data Rates | <p>802.11b: 1, 2, 5.5, 11 Mbps</p> <p>802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</p> <p>802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification</p> | |
| Modulation | <p>Direct Sequence Spread Spectrum</p> <p>DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM</p> | |
| Security | <p>Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES (support for key sizes of 128bits), TKIP, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP, MSCHAP, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM, EAP-AKA PAP, CHAP, TLS, GTC</p> <p>Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows XP only.</p> | |
| Sub-channels | Multinational support with frequency bands and channels compliant to local regulations. | |
| Media Access Protocol | CSMA/CA (Collision Avoidance) with ACK | |
| Network Architecture Models | <p>Ad-hoc (Peer to Peer)</p> <p>Infrastructure (Access Point Required)</p> <p>Intel® My Wifi Technology (iPAN)</p> | |
| Roaming | Provide seamless roaming between like access points (same frequency band) | |
| Output Power (for CCK) | 15 dBm | |
| Output Power (for OFDM; power varies by data rate) | 15 dBm | |
| Power Consumption | <p>Transmit: 2.3 Watts (average, with one spatial streams)</p> <p>Receive: 1.9 Watts (average with two receive chains)</p> <p>Idle mode: 30mW – 40mW (average)</p> <p>Radio off: 20 mW (max)</p> | |
| Power Management | <p>ACPI compliant power management</p> <p>802.11 compliant power saving mode</p> | |
| Antenna Connections | 3 U.FL type connectors, 50 ohm nominal impedance | |
| Range | <p>802.11 a - Typical (@6 Mbps)</p> <p>802.11 b - Typical (@1 Mbps)</p> <p>802.11 g - Typical (@1 Mbps)</p> | <p>600 feet - Outdoor Open Area</p> <p>150 feet - Indoor, Office environment</p> <p>1200 feet - Outdoor Open Area</p> <p>300 feet - Indoor, Office environment</p> <p>1200 feet - Outdoor Open Area</p> <p>300 feet - Indoor, Office environment</p> |
| Form Factors | <p>CMIT & SFF: PCIe</p> | |
| Weight | 0.013 lb (4.0 g) | |
| Dimensions | 1.1 x 1.2 in (26.8 x 30.0 mm) | |
| Operating Voltage | 3.3V +/- 9%, 1.5V +/- 5% | |
| Temperature | <p>Operating:</p> <p>Non-operating:</p> | <p>32° to 176° F (0° to 80° C)</p> <p>-40° to 176° F (-40° to 80° C)</p> |
| Humidity | <p>Operating:</p> <p>Non-operating:</p> <p>Microsoft Windows XP</p> | <p>10% to 90% (non-condensing)</p> <p>5% to 90% (non-condensing)</p> <p>Microsoft Windows Win 7</p> |

Technical Specifications - Networking and Communications

Configuration Utility

- Microsoft Windows XP Wireless Network Connection Manager
- Intel PROSet for Microsoft Windows XP (required for Cisco Compatible Extensions support)
- Intel IHV extensions for Win7 available to support Cisco Compatible Extensions

Technical Specifications - Audio

High Definition Audio

| | |
|----------------------------|---|
| Type | Integrated |
| HD Stereo Codec | Realtek 2-channel ALC221 codec |
| Audio I/O Ports | Front microphone-In (150-K ohm Input Impedance) Rear Line-In/Microphone input (150-K ohm Input Impedance, function is configurable by audio driver) Rear Line-Out* (190 ohms Output Impedance, expects at least a 10-K ohm load) Front Headphone-Out (0.5 Ohm Output Impedance, expects at least a 32 ohm load) Front Microphone/Headphone jack is re-task able to provide Microphone input, line-in or Headphone output to support connecting two headphones to the front of the system. When configured as a second front headphone output, both front headphone outputs are always driven with the same signal. All ports are 3.5mm |
| Internal Speaker Amplifier | 1.5W amplifier for the internal speaker only. External speakers must be powered externally. Rear Line-in audio port is re-taskable as either Line-in or Microphone-In. |
| Multi-streaming Capable | Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks. |
| Sampling | 8 kHz - 192 kHz |
| Wavetable Syntheses | Yes – Uses OS soft wavetable |
| Analog Audio | Yes |
| # of Channels on Line-Out | Stereo (Left & Right channels) |
| Internal Speaker | Yes |
| External Speaker Jack | Yes |
| Full Duplex | Yes |

Technical Specifications – Keyboards and Pointing Devices

HP USB Keyboard

| | | |
|---------------------------------|-----------------------------|---|
| Physical characteristics | Keys | 104, 105, 106, 107, 109 layout (depending upon country) |
| | Dimensions (L x W x H) | 18.12 x 6.47 x 0.96 in (46.03 x 16.43 x 2.44 cm) |
| | Weight | 2 lb (0.9 kg) |
| | Operating voltage | + 5VDC \pm 5% |
| Electrical | Power consumption | 50-mA maximum (with three LEDs ON) |
| | System interface | USB Type A plug connector |
| | ESD | CE level 4, 15-kV air discharge |
| | EMI - RFI | Conforms to FCC rules for a Class B computing device |
| Mechanical | Microsoft® PC 99 - 2001 | Functionally compliant |
| | Keycaps | Low-profile design |
| | Switch actuation | 55-g nominal peak force with tactile feedback |
| | Switch life | 20 million keystrokes (using Hasco modified tester) |
| | Switch type | Contamination-resistant switch membrane |
| | Key-leveling mechanisms | For all double-wide and greater-length keys |
| | Cable length | 6 ft (1.8 m) |
| | Microsoft PC 99 - 2001 | Mechanically compliant |
| | Acoustics | 43-dBA maximum sound pressure level |
| | Operating temperature | 50° to 122° F (10° to 50° C) |
| Environmental | Non-operating temperature | -22° to 140° F (-30° to 60° C) |
| | Operating humidity | 10% to 90% (non-condensing at ambient) |
| | Non-operating humidity | 20% to 80% (non-condensing at ambient) |
| | Operating shock | 40 g, six surfaces |
| | Non-operating shock | 80 g, six surfaces |
| | Operating vibration | 2-g peak acceleration |
| | Non-operating vibration | 4-g peak acceleration |
| | Drop (out of box) | 26 in (66 cm) on carpet, six-drop sequence |
| Approvals | | UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC |
| | Ergonomic compliance | UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, KC |

Technical Specifications – Keyboards and Pointing Devices

| | | |
|---------------------|---------------|--------------------------|
| Kit contents | Keyboard | Installation Guide |
| | Warranty Card | Safety and Comfort Guide |

HP PS/2 Keyboard

| | | |
|---------------------------------|---------------------------|---|
| Physical Characteristics | Keys | 104, 105, 106, 107, 109 layout (depending upon country) |
| | Dimensions (L x W x H) | 18.22 x 6.47 x 1.1 in (46.28 x 16.43 x 2.79 cm) |
| | Weight | 2 lb (0.9 kg) minimum |
| | Operating voltage | + 5VDC \pm 5% |
| Electrical | Power consumption | 50-mA maximum (with three LEDs ON) |
| | System interface | PS/2 6-pin mini din connector |
| | ESD | CE level 4, 15-kV air discharge |
| | EMI - RFI | Conforms to FCC rules for a Class B computing device |
| Mechanical | Microsoft PC 99 - 2001 | Functionally compliant |
| | Keycaps | Low-profile design |
| | Switch actuation | 55-g nominal peak force with tactile feedback |
| | Switch life | 20 million keystrokes (using Hasco modified tester) |
| | Switch type | Contamination-resistant switch membrane |
| | Key-leveling mechanisms | For all double-wide and greater-length keys |
| | Cable length | 6 ft (1.8 m) |
| | Microsoft PC 99 - 2001 | Mechanically compliant |
| | Acoustics | 50-dBA maximum sound pressure level |
| | Operating temperature | 32° to 104° F (0° to 40° C) |
| | Non-operating temperature | -22° to 149° F (-30° to 65° C) |
| | Operating humidity | 15% to 80% (non-condensing at ambient) |
| Environmental | Non-operating humidity | 15% to 90% (non-condensing at ambient) |
| | Operating shock | N/A |
| | Non-operating shock | 65 inch 2.9 ms, six surface; 30g 266 inch/second; 50g 266 inch/second six surface |
| | Operating vibration | 2-g peak acceleration |

Technical Specifications – Keyboards and Pointing Devices

Non-operating vibration Starting at 5 Hz, vary the frequency of vibration from 5 to 500 Hz and back to 5 Hz at a Logarithmic sweep rate of 1 octave per minute.

Drop (out of box) 26 in (66 cm) on carpet, six-drop sequence

Drop (in box) 29.93 in (76 cm) on concrete, 16-drop sequence

Approvals

CUL, ICES-003 Class B, FCC, CE Mark, TUV GS, VCCI, BSMI, C-Tick, KC

Ergonomic compliance

ANSI HFS 100, ISO 9241-4, and TUVGS

HP USB Smart Card (CCID) Keyboard

Key Benefits:

- Protects against unauthorized access with smart card technology
- Delivers even greater security when combined with a HP ProtectTools smart card and the HP ProtectTools Security Software
- Combination of username and password or pin with a smart card or security token
- Secures online transactions using digital signatures and certificates
- Conforms to industry standards for ease of setup and use
- Delivers long product life and quiet operation with high-impact materials and lubricated keys
- Spill drain feature

Physical Characteristics

Keys 104, 105, 106, 107, 109 layout (depending upon country)

Form factor USB basic smart card keyboard

Colors Carbonite/Silver

Dimensions (H x W x D) 18.2 x 6.3 x 1.3 in (46.3 x 16.1 x 3.3 cm)

Electrical

Weight 2 lb (0.9 kg) minimum

Operating voltage + 5VDC \pm 5%

Power consumption 100-mA maximum (with four LEDs ON)

System interface USB Type A plug connector

ESD CE level 4, 15-kV air discharge

EMI - RFI Conforms to FCC rules for a Class B computing device

Microsoft PC 99 - 2001 Functionally compliant

Mechanical

Languages 30+ available

Keycaps Standard design

Switch actuation 55 g nominal peak force with tactile feedback

Switch life 20 million keystrokes (using Hasco modified tester)

Switch type Contamination-resistant membrane

Key-leveling mechanisms For all double-wide and greater-length keys

Cable length 6 ft (1.8 m)

Microsoft PC 99 - 2001 Mechanically compliant

Acoustics 43-dBA maximum sound pressure level

Operating temperature 50° to 122° F (10° to 50° C)

Technical Specifications – Keyboards and Pointing Devices

| | | | |
|---------------------------|---|--|--------------------------------|
| Environmental | Non-operating temperature | -22° to 140° F (-30° to 60° C) | |
| | Operating humidity | 10% to 90% (non-condensing at ambient) | |
| | Non-operating humidity | 20% to 80% (non-condensing at ambient) | |
| | Operating shock | 40 g, six surfaces | |
| | Non-operating shock | 80 g, six surfaces | |
| | Operating vibration | 2-g peak acceleration | |
| | Non-operating vibration | 4-g peak acceleration | |
| | Drop (out of box) | 26 in (66 cm) on carpet, six-drop sequence | |
| | Drop (in box) | 42 in (107 cm) on concrete, 16-drop sequence | |
| | Support | All ISO 7816 smart cards | |
| SmartCard Function | Interface | Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1) | |
| | Chipset | SCM STCIII | |
| | Standard APIs supported | PC/SC, EMV2000, CT-API | |
| | Power | USB Port | |
| | | Short circuit detection (protects smart card and reader) | |
| | | Power supply compliant with ISO7816 and EMV (5V, 60 mA) | |
| | | Supports 3-V and 5-V cards | |
| | Power consumption | 100-mA maximum draw | |
| | Communication | From card | 9600 bps to 330,000 bps |
| | | From computer | 12 Mbps (USB transfer speed) |
| Approvals | Landing mechanism | Contact device | Friction contact |
| | | Card insertions rating | Up to 100,000 insertion cycles |
| | Interface modes | CCID protocol | |
| | Reader performance interface | USB connection | |
| | Electro-magnetic standards | Europe | 2004/108/EC |
| | | USA | USAFCC part 15 |
| | CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, EMV2000, USB-IF | | |
| | ISO 9241-4, TUVGS | | |
| | Keyboard, I/O Security and Documentation CD, warranty card | | |
| | | | |

HP USB PS/2 Washable Keyboard

| | | |
|---------------------------------|------------------------|---|
| Physical Characteristics | Keys | 104 (US) layout or 105 (EU) layout – depending upon country |
| | Dimensions (L x W x H) | 17.67x 6.62 x 1.38 in (449 x 168 x 35 mm) |
| | Weight | 1.7 lb (0.77 kg) minimum |
| | Operating voltage | + 5VDC ±5% |

Technical Specifications – Keyboards and Pointing Devices

| | | |
|---------------------------------|--|--|
| Electrical | Power consumption | 50-mA maximum (with three LEDs ON) |
| | System interface | USB Type A plug connector |
| | ESD | CE level 4, 15-kV air discharge |
| | EMI - RFI | Conforms to FCC rules for a Class B computing device |
| | Microsoft® PC 99 - 2001 | Functionally compliant |
| Mechanical | Keycaps | Stepped -profile design |
| | Switch actuation | 55-g nominal peak force with tactile feedback |
| | Switch life | 20 million keystrokes |
| | Switch type | Contamination-resistant switch membrane |
| | Key-leveling mechanisms | For all double-wide and greater-length keys |
| Environmental | Cable length | 7 ft (2.2 m) |
| | Microsoft PC 99 - 2001 | Mechanically compliant |
| | Acoustics | 43-dBA maximum sound pressure level |
| | Operating temperature | 50° to 122° F (10° to 50° C) |
| | Non-operating temperature | -22° to 140° F (-30° to 60° C) |
| | Operating humidity | 10% to 95% (non-condensing at ambient) |
| | Non-operating humidity | 0% to 95% (non-condensing at ambient) |
| | Operating shock | 40 g, six surfaces |
| | Non-operating shock | 80 g, six surfaces |
| | Operating vibration | 2-g peak acceleration |
| Operating system support | Non-operating vibration | 4-g peak acceleration |
| | Drop (out of box) | 26 in (66 cm) on carpet, six-drop sequence |
| | Drop (in box) | 42 in (107 cm) on concrete, 16-drop sequence |
| Approvals | Windows® 7, Windows Vista, Windows XP Professional | |
| Ergonomic compliance | UL, cUL, FCC, CE, TUV GS, VCCI, BSMI, C-Tick, KCC, USB-IF, WHQL, EN/IEC 60601-1, IP66/NEMA4X | |
| | ANSI HFS 100, ISO 9241-4, and TUVGS | |

HP Wireless Keyboard and Mouse

| | | |
|-----------------|--|--|
| Keyboard | Dimensions (H x L x W) | 1.09 x 18.1 x 6.47 in (27.87 x 460.3 x 164.3 mm) |
| | Weight – Without Two AA Alkaline Batteries | 1.94 lb (880 g) |

Technical Specifications – Keyboards and Pointing Devices

| | | |
|--|--|---|
| Mouse | Dimensions (H x L x W) | 1.46 x 4.53 x 2.47 in (37 x 115 x 62.9 mm) |
| | Weight – Without Two AA Alkaline Batteries | 0.15 lb (67 g) |
| | Dimensions (H x L x W) | 0.33 x 1.79 x 0.72 in (8.4 x 45.5 x 18.4 mm) |
| Receiver | Weight | 0.21 oz (5.9 g) |
| | Cable Length – Minimum | 6 ft (1.8 m) |
| | Range | 32.8 ft (10 m) |
| System Requirements | Windows 7 Home Basic*, Windows 7 Home Premium*, Windows 7 Professional Edition 32*, Windows 7 Professional Edition 64*, Windows 7 Ultimate Edition 32*, Windows 7 Ultimate Edition 64* Windows Vista or Windows XP | |
| | Available USB port for the receiver | |
| | CD-ROM Drive | |
| <p><i>*This system may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See http://www.microsoft.com/windows/windows-7/ for details.</i></p> | | |
| Approvals | Product Safety | UL; CSA /TUV (Europe only); CE Mark; CB Report |
| | Ergonomics | ANSI; ISO (Europe only); GS Mark (Germany only) |
| | EMC | FCC; CE; ACA (-tick); BSMI; KC ; VCCI |
| | CE Mark | EN 55022:2010; EN 55024; EN 301489-1; EN 61000 |
| | Design Guidelines for PCs | PC 99 - connector overmold colors; PC 2001 - full functionality |
| | Telecom | All local telecom requirements and approvals for intended markets |
| | USA | FCC Title 47 CFR, Par 15, Subpart C; other local requirements |
| Environmental | Country Support | US, Belgium, Switzerland, Spain, Denmark, Netherlands, France, Germany, Italy, Portugal, Sweden, Norway, Finland, UK, Poland, Czech Republic, Turkey, Greece, Austria, Bulgaria, Cyprus, Estonia, Hungary, Ireland, Latvia, Lithuania, Luxemburg, Malta, Romania, Slovakia, Slovenia, Vietnam, HK, Australia, NZ, Malaysia, Singapore, Indonesia, Philippines, Thailand, Canada, China, Japan, Korea, Taiwan, India, Venezuela, Ecuador, Russia, Ukraine, Israel, Croatia, United Arab Emirates, Peru, Brazil, Chile, Argentina, Mexico, South Africa, and up to 193 countries worldwide. |
| | Keyboard contains 25% post-consumer recycled plastic material | |

HP PS/2 Mouse

| | |
|-------------------------------|--|
| Dimensions (H x L x W) | 1.46 x 2.48 x 4.53 in (3.70 x 6.29 x 11.50 cm) |
|-------------------------------|--|

Technical Specifications – Keyboards and Pointing Devices

| | | |
|----------------------|----------------------------|--|
| Weight | 3.53 oz (100g; +10g/- 5 g) | |
| | Operating temperature | -32° to 104°F (0° to 40° C) |
| | Non-operating temperature | -4° to 140°F (-20° to 60° C) |
| | Operating humidity | 10% to 90% (non condensing at ambient) |
| | Non-operating humidity | 10% to 90% (non condensing at ambient) |
| Environmental | Operating shock | 40 g, 6 surfaces |
| | Non-operating shock | 80 g, 6 surfaces |
| | Operating vibration | 2 g peak acceleration |
| | Non-operating vibration | 4 g peak acceleration |
| | Drop (out of box) | 80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face |
| | Operating voltage | 5 VDC \pm 10% |
| Electrical | Power consumption | 100mA |
| | System consumption | PS/2 mini-din connector |
| | ESD | CE level 4, 15 kV air discharge |
| | EMI-RFI | Conforms to FCC rules for a Class B computing device |
| | Microsoft PC99 - 2001 | Functionally compliant |
| | Resolution | 800 DPI |
| | Tracking speed | 10 in/s (25.4 cm/s) maximum |
| | Acceleration | \pm 15% |
| | Switch actuation | 65 \pm 20 gf |
| | Switch life | 3,000,000 operations (using Hasco modified tester) |
| Mechanical | Switch type | Low force micro-switches |
| | Tracking mechanism life | 80 km |
| | Cable length | 6 ft (1.8 m) |
| | Microsoft PC99 - 2001 | Mechanically compliant |
| | Width | 6 mm |
| | Diameter | 22.5 \pm 0.2 mm |
| | Maximum rotation force | 50 gf-cm |
| Scroll wheel | Switch type | Light force micro-switch |

Technical Specifications – Keyboards and Pointing Devices

| | | |
|-----------------------------|---|-----------------------------|
| | Switch life | 1 million operations |
| | Mechanical life | Minimum 200,000 revolutions |
| Regulatory Approvals | UL/cUL, FCC, CE Mark, TUV/GS, VCCI, KCC, BSMI, C-Tick | |

HP USB Mouse

| | |
|----------------------------------|--|
| Dimensions (H x L x W) | 1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm) |
| Weight | 0.22 lb (0.10 kg) |
| Cable length | 70.9 in (180 cm) |
| System requirements | Available USB port |

HP USB 1000dpi Laser Mouse

| | | |
|----------------------------------|--|---|
| Dimensions (H x L x W) | 1.47 x 4.53 x 2.47 in (37.3 x 114.97 x 62.86 mm) | |
| Weight | 3.360 oz (102g) | |
| Cable length | 70.9 in (180 cm) | |
| System requirements | Available USB port | |
| Environmental | Operating Temperature | 32° to 104° F (0° to 40° C) |
| | Non-operating Temperature | -4° to 140° F (-20° to 60° C) |
| | Operating Humidity | 10% to 90% (non-condensing at ambient) |
| Mechanical | Resolution | 1000dpi |
| | Tracking Speed | 45 cm/sec |
| | Cable Length | 70.9 in (180 cm) |

Technical Specifications – Keyboards and Pointing Devices

HP USB PS/2 Washable Mouse

| | | | |
|-------------------------------|---|---|--|
| Dimensions (H x L x W) | 1.56 x 2.44 x 4.61 in (3.95 x 6.21 x 11.7 cm) | | |
| Weight | 4.44 oz (126 g) | | |
| Environmental | Operating temperature | –32° to 104°F (0° to 40° C) | |
| | Non-operating temperature | –4° to 140°F (–20° to 60° C) | |
| | Operating humidity | 10% to 90% (non-condensing at ambient) | |
| | Non-operating humidity | 10% to 90% non-condensing | |
| | Operating shock | 40 g, 6 surfaces | |
| | Non-operating shock | 80 g, 6 surfaces | |
| | Operating vibration | 2 g peak acceleration | |
| | Non-operating vibration | 4 g peak acceleration | |
| Electrical | Drop (out of box) | 80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face | |
| | Operating voltage | 5 VDC ± 10% | |
| | Power consumption | 100mA | |
| | System consumption | PS/2 mini-din connector or USB | |
| | ESD | CE level 2 8 kV air discharge | |
| | EMI-RFI | Conforms to FCC rules for a Class B computing device | |
| | Microsoft® PC99 – 2001 | Functionally compliant | |
| | Resolution | 1000 ± 20% DPI | |
| Mechanical | Tracking speed | 14 in/s (35.56 cm/s) maximum | |
| | Acceleration | 2 g | |
| | Switch actuation | 70 g nominal peak force | |
| | Switch life | 3,000,000 operations (using Hasco modified tester) | |
| | Switch type | Low force micro-switches | |
| | Cable length | 8.8 ft total 70 cm+ 2m extension | |
| | Microsoft PC99 – 2001 | Mechanically compliant | |
| | Width | 6 mm | |
| Scroll wheel | Diameter | 1 in (25.4 mm) | |
| | Maximum rotation speed | 48 rats/sec | |
| | Switch type | Light force micro-switch | |
| | Switch life | 3 million operations | |
| Regulatory approvals | Mechanical life | Minimum 200,000 revolutions | |
| | Compliant | FCC, CE Mark, ICES-003-B, IP66/NEMA4X | |

Technical Specifications – Power

Unit Environment and Operating Conditions

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

| | |
|-------------------------------------|---|
| Temperature Range | Operating: 50° to 95° F (10° to 35° C)* Non-operating: -22° to 140° F (-30° to 60° C) |
| Relative Humidity | Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient) |
| Maximum Altitude (unpressurized) | Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m) |

*Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

Power Supply

| | SFF | TWR |
|---|--|--|
| Standard Efficiency | 240W active PFC | 320W active PFC |
| High Efficiency* | 240W active PFC | 320W active PFC |
| 80 PLUS Gold | 87/90/87% efficient at 20/50/100% load (115V) | 87/90/87% efficient at 20/50/100% load (115V) |
| | 9/91/90% efficient at 20/50/100% load (230V) | 89/92/90% efficient at 20/50/100% load (230V) |
| High Efficiency* | 240W active PFC | 320W active PFC |
| 80 PLUS Platinum | 90/92/89% efficient at 20/50/100% load (115V) | 90/92/89% efficient at 20/50/100% load (115V) |
| | 90/93/91% efficient at 20/50/100% load (230V) | 90/94/91% efficient at 20/50/100% load (230V) |
| Operating Voltage Range | 90 - 264 VAC | 90 - 264 VAC |
| Rated Voltage Range | 100 - 240 VAC | 100 - 240 VAC |
| Rated Line Frequency | 50/60 Hz | 50/60 Hz |
| Operating Line Frequency Range | 47 - 63 Hz | 47 - 63 Hz |
| Rated Input Current | 4A | 5.5A |
| Rated Input Current with Energy Efficient* Power Supply | 4A | 5.5A |

Technical Specifications – Power

| | | |
|---------------------------|-------------------------|---------------------|
| Current Leakage (NFPA 99) | < 275 μ A | <450=>275uA |
| Power Supply Fan | 92=>70mm variable speed | 92mm variable speed |
| Power cord length | 6.0 ft. (1.83 m) | 6.0 ft. (1.83 m) |
| External Power Adapter | | |
| Dimensions | N/A | N/A |
| Total Cord Length | N/A | N/A |

*High efficiency power supply is a requirement for ENERGY STAR® qualification in conjunction with a select range of processors and modules

Technical Specifications – Weights & Dimensions

Weights & Dimensions

(configured with 1 HDD & 1 ODD)

| | SFF | TWR |
|---|---|--|
| Chassis (W x H x D) | 13.3 x 3.95 x 14.9 in 338 x 100 x 379 mm | 6.7 x 15.7 x 17.4 in 170 x 399 x 442 mm |
| System Volume | 782.7 cu in 12.8 L | 1828 cu in 30 L |
| System Weight* | 16.7 lb 7.6 kg | 20.5 lb 9.3 kg |
| Max Supported Weight (desktop orientation) | 77.0 lb 35.0 kg | N/A |
| Tower Stand (H x W x D) | 1.1 x 7.0 x 7.9 in 29 x 178 x 200 mm | N/A |
| Packaging (H x W x D) | 9.0 x 19.7 x 23.4 in 229 x 500 x 594 mm | 11.6 x 19.7 x 23.2 in 295 x 500 x 590 mm |
| Shipping Weight* | 17.9 lb 8.1 kg | 28.8 lb 13.1 kg |
| Palletization Profile | 4-units per layer 10-layer max. 40-units per pallet | 4-units per layer 8-layer max. 32-units per pallet |

Technical Specifications – Miscellaneous Features

Management Features

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- Intel Wired for Management support; industry wide initiative to make Intel architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
- Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button

Serviceability Features

- Dual colored power LED on front of computer to indicate either normal or fault condition
- Diagnostic LED Explanation Table:
 - Number of 1-second red LED blinks followed by a 2-second pause, then repeats:
 - 2 - processor thermal protection activated
 - 3 - processor not installed
 - 4 - power supply failure
 - 5 -- memory error
 - 6 - video error
 - 7 - PCA failure (ROM detected failure prior to video)
 - 8 - invalid ROM, bootblock recovery mode
 - 9 - system not fetching code
 - 10 - system hang while loading an option ROM
- HP PC Hardware Diagnostics UEFI:
 - This utility enables hardware level testing outside the operating system on many components. The diagnostics can be invoked by pressing F2 at POST, and is available as a download from HP Support
- System/Emergency ROM
- Flash ROM
- CMOS Battery Holder for easy replacement
- Flash Recovery with Video Configuration Record Software
- 5 Aux Power LED on System PCA
- Processor ZIF Socket for easy Upgrade
- Over-Temp Warning on Screen (Requires IM Agents)
- Clear Password Jumper
- DIMM Connectors for easy Upgrade
- Clear CMOS Button
- NIC LEDs (integrated) (Green & Amber)
- Dual Color Power and HD LED - To Indicate Normal Operations and Fault Conditions
- Color coordinated cables and connectors
- Tool-less Hood Removal
- Front power switch
- System memory can be upgraded without removing the system board or any internal components
- Tool-less Hard Drive, CD & Diskette Removal
- Green Pull Tabs, and Quick Release Latches for easy Identification

Technical Specifications – Miscellaneous Features

Additional Features

| | Description |
|--|--|
| Towerable Orientation | Product can be oriented as either a desktop or a tower |
| Drive Lock | Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided. DPS Access through F10 Setup during Boot A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user |
| Drive Protection System | Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures |
| SMART Technology (Self-Monitoring, Analysis and Reporting Technology) | Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted |
| SMART I - Drive Failure Prediction | Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count |
| SMART II - Off-Line Data Collection | By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure |
| SMART III - Off-Line Read Scanning with Defect Reallocation | IOEDC: I/O Error Detection Circuitry Detects errors in Read/Write buffers on HDD cache RAM |
| SMART IV - End-to-End CRC for hard drives | Interface in F10 setup provides confirmation of SMART IV support. |

Technical Specifications – Environmental Data

Environmental Data

Eco-Label Certifications & Declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- EPEAT Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.

***NOTE:** This product conforms to the examination standards (2003 version) under JEITA's 'PC Green Label System.

Small Form Desktop

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Small Form Factor model is based on a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Energy Consumption (in accordance with US ENERGY STAR® test method)

| | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
|------------------|--------------|--------------|--------------|
| Normal Operation | 21.00 W | 21.05 W | 21.42 W |
| Sleep | 1.42 W | 1.50 W | 1.42 W |
| Off | 0.50 W | 0.57 W | 0.50 W |

NOTE:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Heat Dissipation*

| | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
|------------------|--------------|--------------|--------------|
| Normal Operation | 72 BTU/hr | 72 BTU/hr | 73 BTU/hr |
| Sleep | 5 BTU/hr | 5 BTU/hr | 5 BTU/hr |
| Off | 2 BTU/hr | 2 BTU/hr | 2 BTU/hr |

***NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

| | Sound Power (LWA _d , bels) | Sound Pressure (LpA _m , decibels) |
|-----------------------------|--|---|
| Typically Configured - Idle | 3.6 | 26 |
| Fixed Disk - Random writes | 3.6 | 26 |

Longevity and Upgrading

This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

- 10 externally accessible USB ports

Technical Specifications – Environmental Data

- 4 DIMM memory slots
- 1 PCI Express x16 graphics slot
- 3 PCI Express x1 accessory slots
- 1 3.5" internal storage drive bays
- 1 2.5" internal storage drive bay
- 1 3.5" Media Card Reader bay (could also support an internal storage drive)
- 1 external slim optical drive bay

Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 1ppm by weight
- Cadmium greater than 20ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 14.8 % post-consumer recycled plastic (by wt.)
- This product is 94.1 % recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
 - PAPER/Corrugated 2300 g
- Internal:
 - PLASTIC/Polyethylene low density 56 g
 - PLASTIC/EPE-Expanded Polyethylene 110 g
 - PLASTIC/Polypropylene 15 g
- The PAPER/Corrugated packaging material contains at least 38.4 % recycled content.
- The PLASTIC/Polyethylene low density packaging material contains at least 60.4% recycled content.
- The PLASTIC/EPE-Expanded Polyethylene packaging material contains at least 60.4% recycled content.
- The PLASTIC/Polyethylene packaging material contains at least 60.4 % recycled content.

Technical Specifications – Environmental Data

Tower

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Tower model is based on a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Energy Consumption

(in accordance with US ENERGY STAR® test method)

| | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
|------------------|--------------|--------------|--------------|
| Normal Operation | 22.49 W | 23.72 W | 22.22 W |
| Sleep | 1.42 W | 1.50 W | 1.39 W |
| Off | 0.47 W | 0.56 W | 0.46 W |

NOTE:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Heat Dissipation*

| | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 60Hz |
|------------------|--------------|--------------|--------------|
| Normal Operation | 77 BTU/hr | 81 BTU/hr | 76 BTU/hr |
| Sleep | 5 BTU/hr | 5 BTU/hr | 5 BTU/hr |
| Off | 2 BTU/hr | 2 BTU/hr | 2 BTU/hr |

***NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions

(in accordance with ISO 7779 and ISO 9296)

| | Sound Power (LWAd, bels) | Sound Pressure (LpAm, decibels) |
|-----------------------------|-----------------------------|------------------------------------|
| Typically Configured - Idle | 3.6 | 26 |
| Fixed Disk - Random writes | 3.6 | 26 |

Longevity and Upgrading

This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

- 10 externally accessible USB ports
- 4 DIMM memory slots
- 1 PCI Express x16 graphics slot
- 3 PCI Express x1 accessory slots
- 2 3.5" internal storage drive bays
- 1 2.5" internal storage drive bay
- 1 3.5" Media Card Reader bay
- 1 external slim optical drive bay
- 1 external 5.25" half height optical drive bay

Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Technical Specifications – Environmental Data

Batteries used in the product do not contain:

- Mercury greater than 1ppm by weight
- Cadmium greater than 20ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 15 % post-consumer recycled plastic (by wt.)
- This product is 95.5 % recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
 - PAPER/Corrugated 2280 g
- Internal:
 - PLASTIC/EPE (Expanded Polyethylene) 40 g
 - PLASTIC/Polyethylene low density 144 g
 - PLASTIC/Polypropylene 15 g
- The PAPER/Corrugated packaging material contains at least 53.5 % recycled content
- The PLASTIC/Polyethylene low density packaging material contains at least 60.42 % recycled content
- The PLASTIC/EPE-Expanded Polyethylene packaging material contains at least 60.42 % recycled content.
- The PLASTIC/Polypropylene packaging material contains at least 60.42 % recycled content.

Common to all Form Factors

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled

Technical Specifications – Environmental Data

or carried by the user.

- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/>

[PC_GBU_Product_Design_ISO_14K_Certificate.pdf](#)

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

Options and Accessories (sold separately)

Communication Devices

| | SFF/TWR | Part Number |
|---------------------------------------|---------|-------------|
| Intel Ethernet I210 - T1 Gbe NIC | X | E0X95AA |
| Intel 6205 802.11 a/b/g/n PCIe x1 NIC | X | E0X93AA |

Note: The use of any of these optional NIC Cards (wired or wireless) will disable the Intel vPro Technology features.

Graphics Solutions

| | SFF/TWR | Part Number |
|---|---------|-------------|
| AMD Radeon HD 8350 Graphics (PCIe x16) | X | E1C63AA |
| AMD Radeon HD 8490 Graphics Card | X | E1C64AA |
| Nvidia NVS 310 Graphics (PCIe x16) | X | A7U59AA |
| Nvidia NVS 315 Graphics (PCIe x16) | X | E1C65AA |
| HP USB Graphic Adapter | X | NL571AA |
| HP DisplayPort Cable Kit | X | VN567AA |
| HP DisplayPort To Dual Link DVI-D Adapter | X | NR078AA |
| HP DisplayPort To DVI-D Adapter | X | FH973AA |
| HP DisplayPort to HDMI Adapter | X | BP937AA |
| HP DisplayPort to VGA Adapter | X | AS615AA |
| HP DMS-59 to Dual DVI Cable | X | DL139A |
| HP DMS-59 to Dual DisplayPort Adapter | X | XP688AA |

Data Storage Drives and Accessories

| | SFF/TWR | Part Number |
|---|----------|-------------|
| HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive | X | QK554AA |
| HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive | X | QK555AA |
| HP 128-GB SATA 3.0Gb/s Solid State Drive | X | QV063AA |
| HP 500-GB SATA 3.0Gb/s Solid State Hybrid Drive | X | E1C62AA |
| HP Slim Removable SATA Hard Drive Enclosure (frame & carrier) | X | C1N41AA |
| HP Slim Removable SATA Hard Drive Enclosure (carrier only) | X | E3F39AA |
| HP Chassis (1bay) Security Kit | TWR only | AR639AA |

Options and Accessories (sold separately)

Input Devices

| | SFF/TWR | Part Number |
|---|---------|-------------|
| HP USB Keyboard | X | QY776AA |
| HP USB Smart Card (CCID) Keyboard | X | BV813AA |
| HP USB Keyboard and Mouse Kit | X | B1T09AA |
| HP USB Washable Keyboard | X | VF097AA |
| HP USB and PS/2 Washable Mouse | X | BM866AA |
| HP USB and PS/2 Washable Keyboard and Mouse Kit | X | BU207AA |
| HP PS/2 Mouse | X | QY775AA |
| HP USB Mouse | X | QY777AA |
| HP USB 1000dpi Laser Mouse | X | QY778AA |
| HP Wireless Keyboard and Mouse Combination (Keyboard contains 25% post-consumer recycled plastic material) | X | QY449AA |

System Memory

| | SFF/TWR | Part Number |
|-----------------------------------|---------|-------------|
| HP 4GB DDR3-1600 (PC3-12800) DIMM | X | B4U36AA |
| HP 8GB DDR3-1600 (PC3-12800) DIMM | X | BU37AA |

Multimedia Devices

| | SFF/TWR | Part Number |
|-------------------------------------|---------|-------------|
| HP Slim DVD-ROM Drive | X | VP033AA |
| HP Slim SuperMulti DVD Writer Drive | X | QS209AA |
| HP USB HD 720P v2 Business Webcam | X | D8Z08AA |
| HP Business Headset | X | QK550AA |
| HP USB Business Speakers | X | D9J19AA |

Removable Media Storage

| | SFF/TWR | Part Number |
|--|---------|-------------|
| HP 14-in-1 Media Card Reader (available Dec. 2013) | X | TBD |

Security Devices

| | SFF/TWR | Part Number |
|--|----------|-------------|
| HP Solenoid Lock and Hood Sensor (SFF) | SFF only | E0X97AA |
| HP Solenoid Lock and Hood Sensor (TWR) | TWR only | E0X96AA |
| HP SFF Wall Mount/Security Sleeve | SFF only | VN570AA |
| HP UltraSlim Cable Lock | X | H4D73AA |

Options and Accessories (sold separately)

Stands and Accessories

| | SFF/TWR | Part Number |
|--|----------|-------------|
| HP Integrated Work Center Stand (SFF) | SFF only | QP897AA |
| HP SFF Tower Stand | SFF only | VN569AA |
| HP 600/800 Tower Bezel Kit | TWR only | E1C66AA |
| HP 800/600 SFF Bezel Kit | SFF only | E3F27AA |
| HP Serial Port Adapter (RS-232 compatible) | X | PA716A |
| HP Parallel Port Kit | X | KD061AA |

Monitors for Multi-display Configurations

| | Part Number |
|--|-------------|
| HP EliteDisplay E201 20-inch LED Backlit Monitor | C9V73AA |
| HP EliteDisplay E221 21.5-inch LED Backlit Monitor | C9V76AA |
| HP EliteDisplay E231 23-inch LED Backlit Monitor | C9V75AA |
| HP Compaq LA2206xc 21.5-inch Webcam LCD Monitor | LW490AA |

LANDesk Software (E-Delivery)

| | Part Number |
|---|-------------|
| LANDesk Management Suite License - 1-499 Nodes E-Delivery | QY369AAE |
| LANDesk Management Suite License - 500-999 Nodes E-Delivery | QY370AAE |
| LANDesk Management Suite License - 1000-1999 Nodes E-Delivery | QY371AAE |
| LANDesk Management Suite License - 2000-4999 Nodes E-Delivery | QY372AAE |
| LANDesk Management Suite License - 5000-9999 Nodes E-Delivery | QY373AAE |
| LANDesk Security Suite License E-Delivery | QY379AAE |
| LANDesk Management Suite 1 Year Maintenance - 1-499 Nodes E-Delivery | HZ825AAE |
| LANDesk Management Suite 1 Year Maintenance - 500-999 Nodes E-Delivery | HZ826AAE |
| LANDesk Management Suite 1 Year Maintenance - 1000-1999 Nodes E-Delivery | HZ827AAE |
| LANDesk Management Suite 1 Year Maintenance - 2000-4999 Nodes E-Delivery | HZ828AAE |
| LANDesk Management Suite 1 Year Maintenance - 5000-9999 Nodes E-Delivery | HZ829AAE |
| LANDesk Security Suite 1 Year Subscription | HZ830AAE |
| LANDesk Patch Management 1 Year Subscription - 1-499 Nodes E-Delivery | HZ831AAE |
| LANDesk Patch Management 1 Year Subscription - 500-999 Nodes E-Delivery | HZ832AAE |
| LANDesk Patch Management 1 Year Subscription - 1000-1999 Nodes E-Delivery | HZ833AAE |
| LANDesk Patch Management 1 Year Subscription - 2000-4999 Nodes E-Delivery | HZ834AAE |
| LANDesk Patch Management 1 Year Subscription - 5000-9999 Nodes E-Delivery | HZ835AAE |

Options and Accessories (sold separately)

© Copyright 2013 Hewlett-Packard Development Company, L.P. All rights reserved.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft, Windows and Windows 7 are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel and Core are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.